



## TECHNICAL DATA SHEET

# Superior Strength Solvent-Based™ Adhesive



### NOTICE

Make sure you have an up-to-date technical data sheet by referencing our website: [SRWProducts.com](http://SRWProducts.com)

### DESCRIPTION

A solvent-based adhesive, that when fully cured provides the strongest bond on the market. Ideal for stone, concrete, wood and metal.

### APPLICATIONS

- Retaining Walls
- Pavers / Block
- Firepits
- Concrete
- Metals / Wood
- Masonry
- Natural Stone
- Works on most common landscape and construction materials
- Indoor / Outdoor
- False Joints
- Concrete Overlays & Non-Overlay Project
- Residential or Commercial Use

### FEATURES

- Superior strength and longevity
- Works on wet or frozen surfaces
- High-temperature compatible
- Will not freeze
- Extrudes down to 10°F (-13°C)
- Regular and VOC compliant
- Interior/exterior use

### CURING TIME

- 3 - 7 day full cure
- 10 minute working time

### COVERAGE

<b>COVERAGE:</b> <i>Approximate Length of Bead</i>		
Bead Size	10 oz	28 oz
1/4"	32 ft	89 ft
3/8"	14 ft	35 ft

**EXCEEDS SPECS:** ASTM D3498, APA AFG-01, ASTM C557

SRW Products  
800-752-9326

32005 126th St.  
PO Box 70  
Princeton, MN 55371

[SRWProducts.com](http://SRWProducts.com)

Revised: 01-10-2024

Superior Strength Solvent-Based™ Adhesive Technical Data Sheet

Page 1 of 3

## USER TIPS

- For tumbled products use a 3/8" bead.
- A full positive connection of adhesive to both surfaces is necessary.
- Not for continuous submersion or use below the waterline.
- The surface must dry out 24–48 hours after applying the adhesive.
- Not for use on plastic, rubber, or fiberglass materials.
- Not suitable for direct contact with fire or fire bricks.

## INSTALLATION INSTRUCTIONS


- A. Surfaces must be clean and free from oil, grease, excessive water, ice or any other material that may interfere with proper adhesion.
- B. 2. Cut tip on slant for 1/4" to 3/8" bead. Puncture inner seal with nail or wire and place in cartridge gun
- C. 3. Apply adhesive to one of the surfaces in a continuous bead.
- D. 4. Apply no more adhesive than you can cover in 10 minutes.
- E. 5. Press surfaces together firmly. For faster curing, lift top product and immediately reposition (flash).
- F. 6. Vertical applications require permanent horizontal support.

## APPLICATION PATTERNS



### FLASHING

Flash the adhesive by lifting the cap or block (shown left) for a couple of seconds to shorten the curing time.

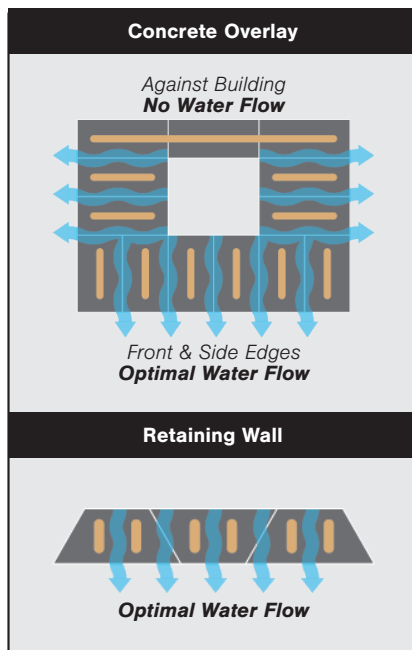

*\*For illustrative purposes only*

### APPLICATION PATTERN

Consult the application patterns diagram to the left to see suggested application patterns for different types of projects. Choose the best methods for your particular project to allow for optimal moisture drainage. We recommend using SRW Superior Strength Solvent- Based Adhesive for all concrete overlays and retaining wall caps, along with most other general construction needs.

### SRW Products

800-752-9326

32005 126th St.

PO Box 70

Princeton, MN 55371

SRWProducts.com

Revised: 01-10-2024

Superior Strength Solvent-Based™ Adhesive Technical Data Sheet

Page 2 of 3

## STORAGE AND SHELF LIFE

Store in an upright position out of direct sunlight. Will not freeze or be damaged by low temperatures. SHELF LIFE: 18 months.

## CLEAN UP

Tools and adhesive may be cleaned with mineral spirits while adhesive is wet. Follow solvent vendor's precautions.

## WARNINGS

**DANGER: EXTREMELY FLAMMABLE. VAPOR HARMFUL.** Contains acetone, hexane and toluene. Keep away from heat, sparks and flame. Use only with positive cross-ventilation. Avoid breathing vapors. Do not swallow. Do not allow eye contact or prolonged skin contact. Uncured product can cause eye or skin irritation. Prolonged or repeated overexposure to solvents in uncured product can cause central nervous system, peripheral nervous system, eye, skin, liver, and reproductive or respiratory system effects. First Aid: If dizziness or other adverse effects are experienced, move to fresh air; contact physician if discomfort persists. If eye contact occurs, flush eyes with water for 15 minutes; contact physician immediately. If swallowed, do not induce vomiting; contact physician immediately. Wash skin contact areas with soap and water; contact physician if irritation persists. For additional information, refer to Material Safety Data Sheet. **KEEP OUT OF THE REACH OF CHILDREN.**

**IMPORTANT NOTICE:** Our recommendations, if any, for the use of this product are based on tests believed to be reliable. Since the use of this product is beyond the control of the manufacturer, no guarantee or warranty, expressed or implied, is made for the merchantability, fitness or suitability for the use of this product or otherwise extending beyond the description hereof except the obligation to replace that product or portion of shipment proved defective. Furthermore, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing laws and/or patents covering any material or use. Liability is limited to product replacement only. Test in a small, discrete area before use.

## TRANSPORT

For more information on the proper handling and transportation of this product, please refer to the latest version of the Safety Data Sheet (SDS). Visit [SRWProducts.com](http://SRWProducts.com) for an up-to-date version of this product's Safety Data Sheet (SDS).

## PACKAGING

SUPERIOR STRENGTH SOLVENT -BASED™ ADHESIVE			
PART#	SIZE	AMT PER CTN	QUANTITY
A 10	10 OZ	12/CTN	64 CTN/PLT
A 28	28 OZ	12/CTN	44 CTN/PLT

SUPERIOR STRENGTH SOLVENT -BASED™ ADHESIVE VOC			
PART#	SIZE	AMT PER CTN	QUANTITY
AP 10	10 OZ	12/CTN	64 CTN/PLT
AP 28	28 OZ	12/CTN	44 CTN/PLT