

TECHNICAL DATA SHEET

ROCK BINDER™



Unsealed



Sealed

DESCRIPTION

Rock Binder™ is a liquid-bonding agent that holds a variety of rocks and aggregates up to 3/4" angular stone and 3/8" round stone together. It bonds and stabilizes rocks and aggregates to reduce the effects of blow-out from heavy wind or leaf blowers, washout from heavy rain, and other environmental elements. Safe for use around children, plants, and animals. The surface remains flexible, while allowing water to pass through.

FEATURES

- Surface remains flexible and permeable
- Helps minimize weed growth
- Easy to apply with sprayer (*purchased separately*)
- Reaches full bond in 24 hours
- Allows surfaces to drain
- Environmentally safe, Low VOC
- Non-toxic
- Safe for kids, plants, and animals
- Controls dust and erosion
- Interior/Exterior
- Reduces landscape maintenance

APPLICATIONS

Please note that the aggregates can be up to 3/4" angular or 3/8" round stone for SRW Rock Binder™ to work as desired.

- Pea Gravel
- Chip Stone
- Decomposed Granite
- Sand/Dirt
- Dust and Erosion Control


COVERAGE

Up to 150 sq. ft. per gallon (18.58 sq. m. per 3.78 liters). Coverage may vary depending on surface and application.

APPLICATION AND CURING TEMPERATURES

50 - 80°F (10 - 26°C)

INSTALLATION INSTRUCTIONS

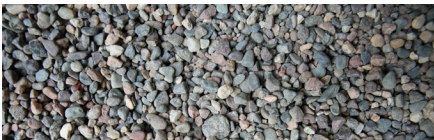


1. Spread aggregate evenly and lightly tamp/compact into place.



2. Rinse the rock before applying SRW Rock Binder™ to remove dust. Let dry before applying SRW Rock Binder™.



3. Stir SRW Rock Binder™ well before each use
4. With a pressurized sprayer, spray SRW Rock Binder™ in a slow, even, saturating coat.
5. **First Coat:** Spray SRW Rock Binder™ in a slow, even saturating coat. *Note – the product goes on white and dries clear*
6. **Wait 15 – 30 minutes** before applying the second coat, allowing the first coat to partially dry and become tacky. Typically, when the product is no longer white.
7. **Second Coat:** Spray in a slow, even saturating coat.

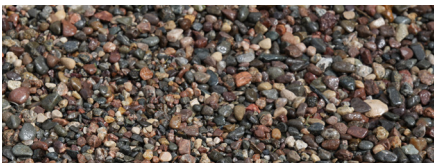

8. Let dry for 24 hours without rain, sprinklers, or extreme humidity. Dry time may vary based on the temperature.
9. When using SRW Rock Binder™ for dust and erosion control, please refer to our User Tips for instructions.

NOTICE

Make sure you have an up-to-date technical data sheet by referencing our website: SRWProducts.com



Scan This QR code to watch the installation video.

CLEAN UP

Immediately rinse off all equipment with clean water and let dry.

STORAGE

KEEP FROM FREEZING. Store container in a cool dry area with lid firmly in place.

USER TIPS

- Intended for decorative areas only
- Apply with a pressurized sprayer
- Maximum bond strength after 24 hours
- DO NOT apply if rain, or extreme humidity is forecast within 24 hours. The area must remain dry during the curing process. (Bond time will be longer with colder temperatures and shorter with higher temperatures.)
- Avoid spraying directly onto plants or trees. Pre-wet plants prior to application. Immediately nurse plants with water if Rock Binder™ is sprayed on them
- Always test in a small, discrete area before use
- Sprays on white, dries clear
- *For dust and erosion control: Dilute 1 part SRW Rock Binder™ with 5 parts water.*
- NOT recommended for areas with foot or vehicle traffic

IMPORTANT NOTICE

Important Notice: Since the use of this product is beyond the control of the manufacturer, no guarantee or warranty, expressed or implied is made for the merchantability, fitness or suitability for the use of this product or otherwise extending beyond the description hereof except the obligation to replace that product for portion of shipment proved defective. Furthermore, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing laws and/or patents covering any material or use. Liability is limited to product replacement only.