



Our Story

SRW Products is a family owned and operated business with 35+ years of experience and leadership in landscape and hardscape products. We have earned a solid reputation for providing exceptional quality products and outstanding customer service. Our dealer-based company continues to thrive because of our team's commitment to helping your business succeed.

We provide so much more than products, because we believe in people and partnerships. Our Territory Sales Representatives and Customer Service Team have formed long-lasting relationships by getting to know their customer's individual needs and providing customized solutions.

Our Product Managers not only seek new and innovative products, but also provide educational materials and expert consultation to assist you in serving your customers. The entire SRW Products team is knowledgeable and goes the extra mile to enhance your success.

We appreciate your business and are especially grateful for future opportunities. At SRW Products we promise to continue to focus on our key priorities of **people**, **products**, and **partnerships**.



SRW ROCK BINDER *** **The state of the sta



See Page 35.

SRW PRODUCTS: SOLID SOLUTIONS FOR BETTER HARDSCAPES

CORE BITS

New

See pages 46-47.

Reinforced Concrete



Granite



High PSI Concrete






Bricks



Concrete Blocks/CMU




Poured Concrete







You can now get your favorite Romex products through SRW Products.

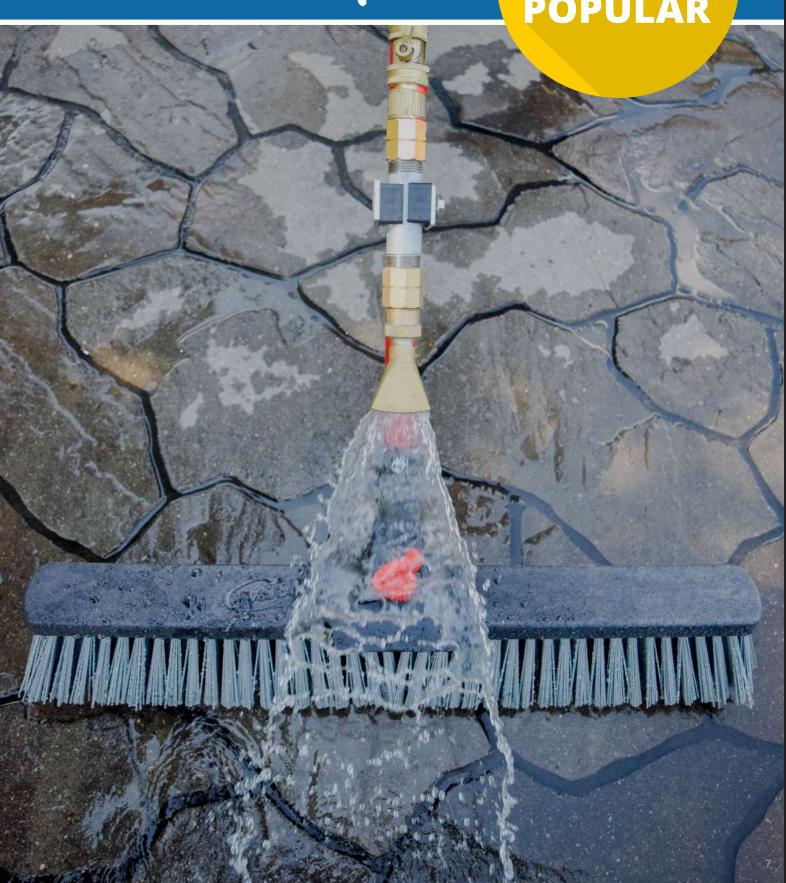

SRW PRODUCTS: SOLID SOLUTIONS FOR BETTER HARDSCAPES



- Superior Strength and Longevity
- Works on wet or frozen surfaces
- Extrudes down to 10°F
- Works on most common hardscape and construction materials
- Interior/Exterior Applications
- VOC Compliant Option

APPLICATION

- Retaining Walls
- Pavers/Block
- Natural Stone
- Metals/Wood
- Firepits

COVERAGE

- 1/4" Bead:10 oz 32 ft, 28 oz 89 ft
- 3/8" Bead: 10 oz 14 ft, 28 oz 35 ft

See page 96 for ordering information

FEATURES

- 1 hour set time: 24 hour full cure
- Designed for hardscape and construction projects
- Suitable for dry or damp surfaces
- High temperature compatible up to 400° F
- Premium, long-lasting strength
- Interior/Exterior Applications
- VOC Compliant

APPLICATION

- Firepits
- Retaining Walls
- Pavers/Concrete
- Pool Copings
- Foam/Vinyl/PVC
- Brick
- Metals/Wood
- Natural Stone
- Non-porous Substrates

COVERAGE

- 1/4" Bead:10 oz 32 ft, 28 oz 89 ft
- 3/8" Bead: 10 oz 14 ft, 28 oz 35 ft

VERTICAL INSTANT LOCK™ ADHESIVE

SF-8™ ADHESIVE



FEATURES

- Instantly locks building materials in place vertically or horizontally
- Low Odor
- 10 minute working time
- Quick curing and non-corrosive
- V-notch nozzle for consistent bead
- Requires a caulking gun with a minimum 14:1 thrust ratio
- Interior/Exterior Applications
- VOC Compliant

APPLICATION

- Veneers
- Household Repairs
- Natural Stone
- Manufactured Stone
- Brick, Block, and Pavers
- Metals/Wood
- Glass and Ceramic Tile
- Dry Stack
- Masonry
- Outdoor Kitchens

COVERAGE

• 210 linear inches

See page 96 for ordering information

SEADHESIVE SINGLES OF THE SINGLES OF THE SINGLES OF THE SINGLES OF THE SINGLE S

FEATURES

- Fastest set-up time on the market
- Designed for construction and hardscape projects
- High temperature compatible up to 250° F
- Premium long-lasting strength
- 1 can = 20+ traditional adhesive tubes with a 3/8" bead
- 8 minute tack free
- Interior/Exterior Applications
- .

APPLICATION

- Retaining Walls
- Pavers
- Concrete
- Natural Stone
- Brick
- Porcelain
- Steel/Metal
- Aluminum
- Vinyl/PVC
- Wood/Plywood
- Composite Materials
- Drywall

COVERAGE

• 3/8" bead = 600 linear ft



- Moisture Curing
- Polyurethane
- Maintains flexibility throughout project life
- Weather Resistant
- Fast Setting
- Interior/Exterior
- VOC Compliant
- Green Pigment

APPLICATION

- Synthetic Turf
- Putting Greens
- Pet Areas
- Playgrounds
- Landscaping




See page 96 for ordering information



RAPID-SET POLYURETHANE™ ADHESIVE



Can withhold high temps up to 400°F

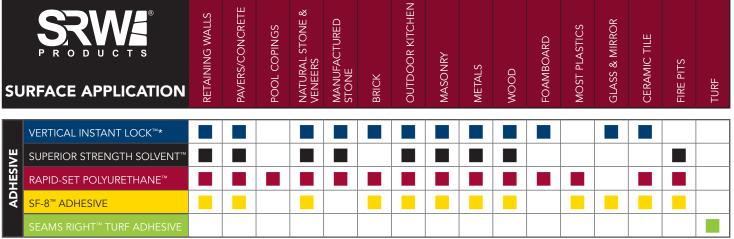

APPLICATION PATTERNS FOR OPTIMAL MOISTURE DRAINAGE*

For SF-8™ Adhesive, Superior Strength Solvent-Based™ Adhesive & Rapid-Set Polyurethane™ Adhesive See Fig. A & B

For Vertical Instant Lock™ Adhesive See Fig. C


*For illustrative purposes only

OPTIMAL WATER FLOW

for concrete overlay

Against Building

No Water Flow



Front & Side Edges
Optimal Water Flow

OPTIMAL WATER FLOW

Fig. B for retaining wall

OPTIMAL WATER FLOW

for vertical applications




Fig. C

THE STRENGTH OF SUPERIOR STRENGTH SOLVENT-BASED™ ADHESIVE

Chemical Makeup of Solvent-Based Adhesives

Solvent-based adhesives cure through the evaporation of the solvents within the adhesive. What makes this type of adhesive so strong is that the solvents push away any moisture from where the adhesive is placed on the substrate, allowing it to bond to even wet surfaces.

Our Superior Strength Solvent-Based[™] Adhesive has green strength within 3-4 hours of application and is fully cured in 3-7 days. However, this curing process can be hastened by flashing. Green strength is when the pieces no longer readily move or separate. Once cured, this adhesive is so strong that the paver or substrate will fail before the adhesive!

USE THE PROCESS OF FLASHING WHEN USING SUPERIOR STRENGTH SOLVENT-BASED™ ADHESIVE

Superior Strength Solvent-Based[™] adhesive can build early grab strength by flashing your block or cap.

Flashing is a process where you extrude adhesive and place the block or cap on, immediately lift the top block or cap at an angle for two seconds and replace it. This will expose surface area within adhesive to release up to 50% of solvents and provide early strength.



ADHESIVE DISPLAY





FEATURES

- 18:1 Thrust Ratio
- Professional Grade
- Spout Cutter/Seal Puncture Tool
- Revolving Barrel/Zinc Handle
- Heavy-duty Welded Design
- Recommended for VIL Vertical Instant Lock™
- Ergonomic Handle
- Revolving barrel

FEATURES

- 10:1 Thrust Ratio
- Ladder Hook and Thumb Release
- Smooth Rod Cradle
- Heavy-duty Steel Construction

STANDARD

 28 oz guns include a seal puncture and spout cutter

FEATURES

- 3:1 Thrust Ratio
- Non-Drip for Easy Cleanup

ECONOMY

- Smooth Rod Cradle
- Heavy-duty Steel Construction
- 28 oz guns include a seal puncture and spout cutter

Caulking guns Available in 10 and 28 oz sizes

See page 96 for ordering information



- Dimensions: 67" H x 16" W x 16" D
- Quality heavy-duty construction, to easily handle SRW Products adhesives
- Two Wire Shelves
- Bottom Storage Self
- Sign Channel to hold product labels (ordered separately)
- Powder coat finish: semi-gloss black
- Header Sign Set Conveniently packaged with the display

Contact your Territory Sales Representative today about the qualifications required to get a display. See page 96 for ordering information



SRW4® PRODUCTS	TECHNISEAL	ALLIANCE	SEK	BRICKSTOP	LOCTITE
		ADHESIVE CROSS	REFERENCE		
SUPERIOR STRENGTH SOLVENT-BASED™	-	-	SB-10 PAVER BOND	-	-
RAPID-SET POLYURETHANE™	STRUCTURE BOND PU PASTE	GATOR BLOCK BOND XP	SB-15 RAPID SET	BRICKSTIK XS	PL3 PREMIUM
VIL VERTICAL INSTANT LOCK™	STICKYSTONE	-	SB INSTA-GRIP	-	-
SF-8™	STRUCTURE BOND	-	-	-	-
SEAMS RIGHT™ TURF	-	-	-	-	-



PREMIUM: FEATURES

- Teflon coated aluminum body
- Teflon coated brass tip
- Easy to clean off dried adhesive
- Fully Adjustable Dial

See page 96 for ordering information

DISPENSER GUN



STANDARD: FEATURES

- One piece plastic body
- Aluminum needle with brass tip
- Fully Adjustable Dial
- Turn adjustable dial clockwise to prevent release during transport or in storage

See page 96 for ordering information



FEATURES

- Twists on the standard or premium dispenser gun for easy cleaning
- Includes spray nozzle for spot cleaning on the job site
- 14 oz can for extended use

See page 96 for ordering information



Be sure the substrate can support the weight. To calculate the recommended amount of linear inches (cm) of adhesive needed, multiply the weight in lbs. (kg) by 2.33 (13.05).



AND MILDEW CLEANERTh

EFFLORESCENCE

出

REMOVER™



FEATURES

- Opens surface pores for optimal sealer bond
- Removes polyhaze, efflorescence and ground-in dirt
- Restores original paver color
- Contains no muriatic acid or hydrochloric acid
- Dilute 1:1 Ratio

APPLICATION

- Concrete Pavers
- Clay Pavers
- Block Retaining Wall
- See chart on page 17

COVERAGE

• Covers up to 200 sq. ft. per gallon

See page 96 for ordering information

FEATURES

- Kills mold, moss, mildew, lichen and algae from the inside out
- Non-acidic, no-bleach formula
- Dilute 5:1 Ratio

COVERAGE

Covers up to 2,200 sq. ft. per gallon of concentrate

APPLICATION

- Concrete Pavers
- Clay Pavers
- Wetcast
- Granite/Quartz
- Marble/Travertine
- Limestone
- Bluestone/Sandstone
- Block Retaining Wall
- Manufactured Stone
- Stamped Concrete
- Brick
- Shingles
- Asphalt
- Wood
- Vertical Applications
- See chart on page 17

See page 96 for ordering information

FEATURES

- Dissolves mineral deposits (efflorescence)
- Restores original surface color
- Contains no muriatic acid or hydrochloric acid
- Dilute 1:1 Ratio

APPLICATION

- Concrete Pavers
- Clay Pavers
- Block Retaining Wall
- See chart on page 17

COVERAGE

• Covers up to 200 sq. ft. per gallon

See page 96 for ordering information



- Removes ground-in dirt, light grease and oil
- Easy to use, concentrated solution
- Contains No Acid
- Dilute 1:1 Ratio

APPLICATION

- Wetcast
- Granite/Quartz
- Marble/Travertine
- Limestone
- Bluestone/Sandstone
- See chart on page 17

COVERAGE

• Covers up to 200 sq. ft. per gallon

See page 96 for ordering information





SRW Products JetSweep™ fan nozzle provides a wide slurry spray to assist with one-person cleaning jobs.

SI	SRVE PRODUCTS JRFACE APPLICATION	CONCRETE PAVERS	CLAY PAVERS	CONCRETE PERMEABLE PAVERS	WETCAST	GRANITE/QUARTZ	MARBLE/TRAVERTINE	LIMESTONE	BLUESTONE/ SANDSTONE	BLOCK RETAINING WALLS	MANUFACTURED STONE	STAMPED CONCRETE	CLEANER CATEGORY
	PW PAVER WASH™												GENERAL CLEAN
	DW DUAL WASH™												GEN
LO LO	EF EFFLORESCENCE™												
CLEANERS	M³C MOLD, MOSS & MILDEW™												Z
ĒĀ	CDX CLEANER DEGREASER X-TREME™												CLEAN
디디	RE RUST ELIMINATOR™												
	OC ORGANIC STAIN CLEANER™												SPECIALTY
	XY XYLENE SOLVENT™												SP
	SS SEALER STRIPPER™												

RE RUST ELIMINATOR



FEATURES

- Removes Oil, Grease, Tar, Gum, Rubber, and Paint
- Fast-acting concentrated formula
- Pressure wash clean with water

COVERAGE

• Coverage varies, spot treat as needed

APPLICATION

- Concrete Pavers
- Clay Pavers
- Concrete Permeable Pavers
- Wetcast
- Granite/Quartz
- Marble/Travertine
- Limestone
- Bluestone/Sandstone
- Block Retaining Wall
- Manufactured Stone
- See chart on page 17

See page 96 for ordering information



FEATURES

- Removes rust and hard water stains
- Rinses clean with water
- Heavy-duty concentrated formula

COVERAGE

• Coverage varies, spot treat as needed

APPLICATION

- Concrete Pavers
- Clay Pavers
- Granite/Quartz
- Bluestone/Sandstone
- Block Retaining Wall
- See chart on page 17

See page 96 for ordering information



FEATURES

- Breaks down organic stains from leaves, wood tannins, pine needles, acorns, fruit, wine, etc.
- Rinses clean with water

COVERAGE

Coverage varies, spot treat as needed

APPLICATION

- Concrete Pavers
- Clay Pavers
- Wetcast
- Granite/Quartz
- Marble/Travertine
- Limestone
- Bluestone/Sandstone
- Block Retaining Wall
- Manufactured Stone
- See chart on page 17



- Thins and dissolves acrylic sealers
- Fast-Acting Solvent
- Aids in cleanup of tools
- Removes Unwanted Overspray
- Removes trapped moisture in most film-forming sealers

COVERAGE

Covers up to 200 sq. ft. per gallon

APPLICATION

- Concrete Pavers
- Wetcast
- Granite/Quartz
- Marble/Travertine
- Limestone
- Block Retaining Wall
- Manufactured Stone
- Stamped Concrete
- See chart on page 17

See page 96 for ordering information



FEATURES

- Aids in removal of acrylic sealing and curing compounds
- Industrial Strength
- Graffiti/Dry Fog Paints
- Tile/Carpet Adhesive
- Biodegradable

COVERAGE

• Covers up to 200 sq. ft. per gallon

APPLICATION

- Concrete Pavers
- Clay Pavers
- Concrete Permeable Pavers
- Wetcast
- Granite/Quartz
- Marble/Travertine
- Limestone
- Bluestone/Sandstone
- Block Retaining Wall
- See chart on page 17

See page 96 for ordering information



CLEANER/SEALER DISPLAY

FEATURES

- Dimensions: 72" H x 28" W x 24" D
- Quality heavy-duty construction, to easily handle SRW Products cleaners and sealers
- Sign Channel to hold product labels (ordered separately)
- Powder coat finish: semi-gloss black
- Header Sign Set Conveniently packaged with the display

Contact your Territory Sales Representative today about the qualifications required to get a display.

CLEAN BEFORE SEALING FOR THE BEST BOND

Removing all surface stains is essential to getting the best-looking seal. If needed, start by using one of the following to remove specific issues.

- EF Efflorescence Remover™
- M³C Mold, Moss, and Mildew Cleaner™
- CDX Cleaner and Degreaser X-treme™
- RE Rust Eliminator™
- OC Organic Stain Cleaner[™]

Whether you use one of the above spot cleaners or not, SRW Products always recommends using PW Paver Wash™ or DW Dual Wash™, depending on the surface, prior to sealing a project. Our cleaning solutions pull the dirt and debris out, leaving a perfect surface for the sealer to bond. While pressure washing drives dirt and debris deeper into the pores.




LEARN MORE HERE



POWERFUL CLEANERS FOR ANY SURFACE

Beautiful and long-lasting hardscape projects require the best cleaners and degreasers for optimal bonding before sealing.

The best seal starts with a clean surface, and each hardscape surface has distinctly different qualities. At SRW Products, we have the cleaners you need from our general purpose cleaners that open up pours and remove ground-in dirt to our specialty cleaners that remove rust from pavers or residue from wetcast. We've designed our full line of cleaners to give you the best cleaning power for each surface type and situation.

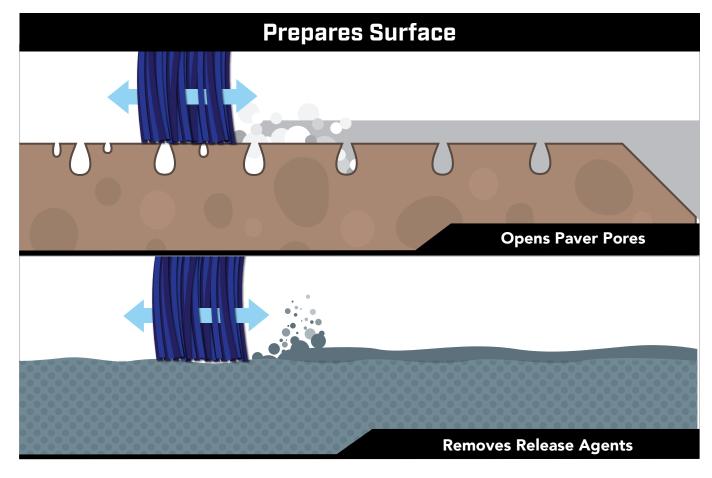



- Water-based
- Invisible/Natural-look finish
- CARB Compliant
- Minimizes salt and freeze/thaw damage
- Interior/Exterior Applications

APPLICATION

- Concrete Pavers
- Clay Pavers
- Concrete Permeable Pavers
- Block Retaining Wall
- Manufactured Stone
- See chart on page 24

COVERAGE

 Covers up to 200 sq. ft. per gallon

PAVER SEAL

See page 97 for ordering information



FEATURES

- Water-based
- Low-gloss finish
- Color-enhancing
- Minimizes salt and freeze/thaw damage
- Stabilizes joint sand from washout, weeds and ants
- Provides UV Protection
- Interior/Exterior Applications

APPLICATION

- Concrete Pavers
- Block Retaining Wall
- Manufactured Stone
- See chart on page 24

COVERAGE

 Covers up to 150 sq. ft. per gallon

PAVER SEAL

See page 97 for ordering information

HGHIGH GLOSS™



FEATURES

- Water-based
- High-gloss, wet-look finish
- High Color Enhancement
- Stabilizes joint sand from washout, weeds and ants
- Minimizes salt and freeze/thaw damage
- Provides UV protection
- Exterior Applications

APPLICATION

- Concrete Pavers
- Block Retaining Wall
- Manufactured Stone
- See chart on page 24

COVERAGE

 Covers up to 150 sq. ft. per gallon

PAVER SEAL

See page 97 for ordering information

PSX PENETRATING X-TREME™



FEATURES

- Water-based
- Invisible/Natural-look finish
- Minimizes salt and freeze/thaw damage
- Ideal for high-traffic areas
- Interior/Exterior Applications

APPLICATION

- Concrete Pavers
- Clay Pavers
- Concrete Permeable Pavers
- Wetcast
- Block Retaining Walls
- Manufactured Stone
- See chart on page 24

COVERAGE

• Covers up to 200 sq. ft. per gallon

PREMIUM SEAL

See page 97 for ordering information

.GX LOW GLOSS X-TREME™

HGX HIGH GLOSS X-TREME



FEATURES

- Solvent-Based
- Low-gloss finish
- High Color Enhancement
- Minimizes salt and freeze/thaw damage
- Provides UV Protection
- VOC Compliant Option
- Exterior Applications

APPLICATION

- Concrete Pavers
- Concrete Permeable Pavers
- Wetcast
- Granite/Quartz
- Marble/Travertine
- Limestone
- Manufactured Stone
- Stamped Concrete
- See chart on page 24

COVERAGE

• Covers up to 250 sq. ft. per gallon

PREMIUM SEAL

See page 97 for ordering information

Premium Seal HIGH GLOSS X-TREME Angelow long data terror of the seal of the s

FEATURES

- Solvent-Based
- High-gloss, wet-look finish
- High Color Enhancement
- Minimizes salt and freeze/thaw damage
- Provides UV Protection
- VOC Compliant Option
- Exterior Applications

APPLICATION

- Concrete Pavers
- Concrete Permeable Pavers
- Wetcast
- Granite/Quartz
- Marble/Travertine
- Limestone
- Manufactured Stone
- Stamped Concrete
- See chart on page 24

COVERAGE

• Covers up to 250 sq. ft. per gallon

PREMIUM SEAL

See page 97 for ordering information



- Solvent-based
- High-gloss, wet-look finish
- Acrylic/Siloxane Blend
- 2-in-1 premium formula providing powerful film-forming and penetrating protection
- High Color Enhancement
- Minimizes salt and freeze/thaw damage
- Provides UV Protection
- Commercial/Industrial Strength
- VOC Compliant Option
- Exterior Applications

APPLICATION

- Concrete Pavers
- Concrete Permeable Pavers
- Wetcast
- Granite/Quartz
- Marble/Travertine
- Limestone
- Block Retaining Wall
- Manufactured Stone
- Stamped Concrete
- See chart on page 24

COVERAGE

• Covers up to 250 sq. ft. per gallon

PREMIUM SEAL

See page 97 for ordering information

CHOOSE YOUR FAVORITE SHEEN OF PROTECTION

Natural LookPS or PSX

Penetrating sealers create an invisible protective barrier.

Color Enhancing LG or LGX

Low Gloss sealers provides a color enhancing sheen.



Wet Look HG or HGX

High Gloss sealers provide protection with a wet look.



- Solvent-based
- High-gloss, wet-look, restoring pigmented sealer
- Restores faded pavers with color-reviving technology
- Minimizes salt and freeze/thaw damage
- Provides UV Protection
- VOC Compliant Option
- Exterior Applications

COVERAGE

• Covers up to 250 sq. ft. per gallon

APPLICATION

- Concrete Pavers
- Concrete Permeable Pavers
- Granite/Quartz
- Marble/Travertine
- Limestone
- Exposed Aggregate Concrete
- Intended for specific surface colors: Charcoal, Red, Brown, and Tan
- See chart on page 24

Read instruction regarding surface color options.

SPECIALTY SEAL

See page 97 for ordering information



S-PS STONE PENETRATING™

FEATURES

- Solvent-based
- Invisible/Natural-look finish
- Minimizes salt and freeze/thaw damage
- VOC Compliant Option
- Exterior Applications

APPLICATION

- Granite/Quartz
- Marble/Travertine
- Limestone
- Bluestone/Sandstone
- Concrete Pavers
- Clay Pavers
- Concrete Permeable Pavers
- Wetcast
- Block Retaining Wall
- Manufactured Stone
- See chart on page 24

SPECIALTY SEAL

See page 97 for ordering information



FEATURES

- Water-based
- Natural-look/Matte finish
- 2-in-1: seals surface and stabilizes joints
- Eliminates Joint Washout
- Reduces weeds and ant infestation
- Resists moss, mold and mildew growth
- Residential and Commercial

APPLICATION

- Concrete Pavers
- Wetcast
- Clay Pavers
- See chart on page 24

COVERAGE

- Joint widths up to 34"
- Seals and stabilizes standard joints:
 Covers up to 80 -120 sq. ft. per gallon
- Cured polymeric sand: Covers up to 125 sq. ft. per gallon

SPECIALTY SEAL

See page 97 for ordering information

SRW SLIT FOAM ROLLER™

SRW SLIT FOAM ROLLER™



FEATURES

- Granual additive to improve slip resistance
- Adds Invisible Grip
- Can be used with all SRW Products film-forming sealers
- Can be used with all low gloss and high gloss SRW Products sealers
- 1 pouch per 1 gal

APPLICATION

- Specialty Seal: PRX
- Premium Seal: LGX, LGX VOC, HGX, HGX VOC, DG, DG VOC
- Paver Seal: LG, HG

See page 98 for ordering information




FEATURES

- Water-Based
- Applies SRW Products sealers evenly
- Works great on textured surfaces
- Remains spongy and will not compress

APPLICATION

• Use with any water-based sealers.





FEATURES

- Applies SRW Products sealers evenly
- Works great on textured surfaces
- Remains spongy and will not compress

APPLICATION

• Works with all SRW Products sealers.




SRW PRODUCTS CLEANERS VS. PRESSURE WASHING

SRW Products PW and DW effectively open the pores of your pavers, allowing sealers to bond and penetrate better. These cleaners also help remove construction debris, dust, and efflorescence.

Pressure Washing without a cleaner drives dirt deeper into the pores leaving the potential for reduced bonding of the sealer.

SEALER DISPLAY

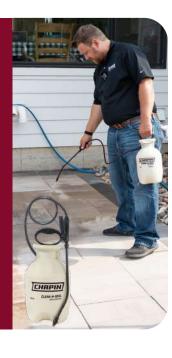

ONE GALLON SPRAYER

FEATURES

- 1-Gallon funnel-top, translucent tank for easy filling and cleaning
- Compatible with many SRW Products sealers, cleaners, and stabilizers
- 12" Curved wand with shutoff
- 3 nozzles for Fine, Medium, and Coarse/Viscous liquids
- Flexible and Reinforced 34" Hose
- Ergonomic handle for easy pumping and carrying
- Chemical Resistant Hose and Seals

APPLICATION

• Specialty Seal: S-PS, SGX, JS, PRX • Premium Seal: PSX, LGX, HGX, DG

• Paver Seal: PS, LG, HG • SRW Cleaners: M³C, Xylene

See page 98 for ordering information

CONSTRUCTION SPRAYER

HEAVY-DUTY



FEATURES

- Use with SRW Product Sealers
- Galvanized Steel
- Can handle up to 35% solids
- Built for commercial applications

APPLICATION

• Works well with all SRW Products sealers.

See page 98 for ordering information



FEATURES

- Dimensions: 72" H x 28" W x 24" D
- Quality heavy-duty construction, to easily handle SRW Products cleaners and
- Sign Channel to hold product labels (ordered separately)
- Powder coat finish: semi-gloss black
- Header Sign Set Conveniently packaged with the display

Contact your Territory Sales Representative today about the qualifications required to get a display.

SI	SRVA® PRODUCTS	CONCRETE PAVERS	CLAY PAVERS	CONCRETE PERMEABLE PAVERS	WETCAST	GRANITE/OUARTZ	MARBLE/TRAVERTINE	LIMESTONE	BLUESTONE/ SANDSTONE	BLOCK RETAINING WALLS	MANUFACTURED STONE	STAMPED CONCRETE	SEALER CATEGORY
	PS PENETRATING™												EAL
	LG LOW GLOSS™												PAVER SEAL
	HG HIGH GLOSS™												PAV
S	PSX PENETRATING X-TREME™												ΞAΓ
SEALERS	LGX LOW GLOSS X-TREME™												PREMIUM SEAL
EAI	HGX HIGH GLOSS X-TREME™												N⊠
0,	DG DUAL GUARD™												PRE
	PRX PAVER RESTORE X-TREME™ JS JOINT STABILIZER ™												SPECIALTY SEAL
	S-PS PENETRATING™												SPE

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.


Si	SRWA PRODUCTS PECS/ACCESSORIES	COVERAGE UP TO SO. FT.	WATER BASED	SOLVENT BASED	PIGMENTED	SLIT FOAM ROLLER	SLIT FOAM ROLLER X-TREME	SLIP RESIST COMPATIBLE	HEAVY-DUTY CONSTRUCTION SPRAYER	SEALER CATEGORY
	PS PENETRATING™	200 SQ.FT/GAL								SEAL
	LG LOW GLOSS™	150 SQ.FT/GAL								ER S
	HG HIGH GLOSS™	150 SQ.FT/GAL								PAVER
	PSX PENETRATING X-TREME™	200 SQ.FT/GAL								7
RS.	LGX LOW GLOSS X-TREME™	250 SQ.FT/GAL	_			_				1 SE/
SEALERS	HGX HIGH GLOSS X-TREME™	250 SQ.FT/GAL							_	PREMIUM SEAL
S	DG DUAL GUARD™	250 SQ.FT/GAL								PREI
	PRX PAVER RESTORE X-TREME™	250 SQ.FT/GAL								Ę
	JS JOINT STABILIZER™	120 SQ.FT/GAL								SPECIALTY SEAL
	S-PS PENETRATING™	200 SQ.FT/GAL								SPE

Coverage may vary depending on surface and application. Refer to product label for full usage instructions.



PRIOR TO SEALING A SURFACE

Whether using a penetrating sealer or a film forming sealer, SRW Products strongly recommends a **two** person **two** step application.





PERSON TWO: Roll the surface with one of our select slit foam rollers to ensure sealer is evenly distributed and does not pool in the joints or texture of the material in which it is applied.

PROTECT YOUR PROJECTS AND **GROW YOUR BUSINESS**

Seal your hardscape surfaces to protect, enhance and restore.

In the images shown on the right, you can see how unsealed pavers allow moisture and contaminants to seep into the surface. The SRW Products sealed paver beads the salt water on the surface, allowing it to be easily brushed or cleaned away.

SEALED



WHY SEAL?

PREVENT DAMAGE FROM:

- ► Salt/Acid Rain
- ► Surface Erosion
- ▶ Pool Chemicals ▶ Deep Staining
- ► Color Fade
- ▶ Freeze/Thaw

Sealed with SRW Products Penetrating sealer

UNSEALED





BACK ROLLING SEALERS

When spraying sealer onto pavers, back rolling will prevent the unwanted pooling of sealer on your project.







Crete Rai

Concrete Edging

FEATURES

- 3-point interlocking connection for maximum strength
- Open footprint allows for proper drainage and encourages root development along the edge of the project
- Unique, Patent-pending design, injection molded design
- 0.210" wall thickness with heavy-duty gussets
- 7' 9" length x 1 7/8" height
- Stacking pins for easy transport and shipping
- 100% Recycled HDPE with added UV resistance

APPLICATIONS

- Straight and curved edges
- Foot traffic or light duty vehicle traffic projects
- Paving stone installation
- Traditional Base Installation
- For residential and light-duty commercial applications
- Use with a gravel pathway and SRW Path Stabilizer™
- Paver heights of 2 3/8" - 3" 1/8" (60-80mm)
- For use with spikes or stakes

COVERAGE

- One bundle (24 peices) = 187.5 linear feet
- One pallet = 5250 linear feet (28 bundles, 672 peices)

See page 98 for ordering information

FEATURES

- Fiber reinforced for maximum strength
- Fast Set Time
- Polymer-modified for flexibility to withstand freeze/thaw
- Residential or light commercial use
- Designed for all climates
- Creates solid interlock for projects

APPLICATION

- Curved, straight or irregular edges
- Pavers and Permeable Pavers
- Natural Stone and Wetcast
- Driveways, Paths and Patios
- Traditional, Open Grade/Permeable Base Installations

COVERAGE

• One 50 lb. bag covers 13 - 17 linear feet



PAVER RAI **UNIVERS**/



FLEX PAVER RAI







FEATURES

- Permanent and invisible barrier between hardscapes and other landscape materials
- Product height 1 7/8"

APPLICATION

- Straight and curved applications
- For use with spikes, staples or stakes

See page 98 for ordering information

FEATURES

- Most Flexible Option
- Product height 1 7/8"

APPLICATION

- Straight and curved applications
- For use with spikes or staples

See page 98 for ordering information

FEATURES

- Ideal for installation against porcelain, wetcast or natural stone to prevent shifting
- Product height 1 3/16"

APPLICATION

- Straight and curved applications
- Low profile applications
- For use with spikes, staples or stakes

See page 98 for ordering information

FEATURES

- Easy to Install
- Kid and pet safe
- Versatile and Durable
- Product height 3.3"

APPLICATION

- Landscape Edging
- Tree Rings
- Pathway Border
- Concrete Form Boards

AVAILABLE IN 2 COLORS

TEAK

BLACK

4 Pack of stakes are now available. See page XX for ordering Details



DON'T FORGET TO SECURE THE EDGE **OF YOUR PAVER PROJECT WITH** SPIKES.

Spikes should be placed every one foot on the paver rail and every 8 inches when going around a curve or corner.

Smooth Spikes are the most commonly used spikes to secure paver edging.

Spiral Spikes have a greater surface area allowing for more contact with the base material.

Bright Spikes can rust into the base material over time locking the spikes in adding to their holding power.

Galvanized Spikes resist rust, making maintenance and repairs easier.

See page 98 for ordering information





SRW

X-TREME

POLYMERIC SAND

ONG-LASTING

FEATURES

- Zero Haze: Clear polymer technology sets you up for a haze-free project.
- Zero Dust: Specially mixed to bind polymers and sand, reducing fines and creating a dust-free install.
- Zero Problems: Rain safe in just 10 minutes.
 Fastest set up time in the market helps with unforeseen weather.

APPLICATIONS

- Concrete Pavers
- Driveways
- Pool Decks
- Patios and Walkways
- Concrete Overlays and Non-Overlays

COVERAGE: FOR JOINTS 1/16" - 2"

- Narrow Joints: 55 75 sq. ft.
- Wide Joints:
 20 30 sq. ft.

AVAILABLE IN 5 COLORS

TAN

GRANITE

BLACK

IVORY

BEIGE*

*Region specific, ask your Territory Sales Representative for more information.

See page 98 for ordering information

FEATURES

- Wide Joints
- No haze due to advanced polymer technology
- Strong, solid joints
- Long-lasting to prevent washout and weeds
- Rain safe in 20 minutes

APPLICATION

- Natural Stone
- Wetcast
- Patios and Walkways
- Pool Decks

COVERAGE: FOR JOINTS 1/16"- 6"

- Narrow Joints: 55 75 sq. ft.
- Wide Joints: 20 30 sq. ft.

AVAILABLE IN 2 COLORS

TAN

GRANITE





- Wet applied jointing sand
- Pre-mixed and ready to use
- Use with open grade/permeable or traditional base
- Permeable
- Can be installed in the rain
- Freeze safe through curing
- Easy to use, simply brush into joints and settle with water
- Resists weeds and plant growth
- No Activation Needed

APPLICATIONS

- Light-Duty Residential Driveways
- Porcelain
- Concrete/Clay Pavers
- Patios and Walkways
- Natural Stone
- Pool Decks
- Wetcast
- Terracotta

COVERAGE: FOR JOINTS 1/8" - 5"

• One tub covers 45 - 65 sq. ft. with a 1/8" joint

AVAILABLE IN 5 COLORS

BEACH


PLATINUM

TAN

GRANITE

BLACK

See page 98 for ordering information

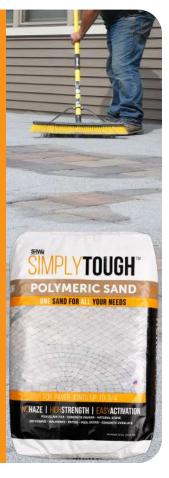

FEATURES

- No Haze
- High Strength
- Easy Activation and Installation
- One sand for most projects

APPLICATION

- Porcelain Tile
- Concrete Pavers
- Natural Stone
- Patios and Walkways
- Pool Decks
- Concrete Overlays
- Driveways

COVERAGE: FOR JOINTS 1/16" - 3/4"

• Narrow Joints: 55 - 75 sq. ft.


• Wide Joints: 25 - 35 sq. ft.

AVAILABLE IN 2 COLORS

TAN

GRANITE

SRW4® PRODUCTS	TECHNISEAL	ALLIANCE	SEK	ROMEX	
	JOINTIN	IG SANDS CROSS REFER	ENCE		
PAVERMATE Z3™	HP NEXTGEL	GATOR SUPERSAND BOND G2	-	-	
X-TREME™	NOCO POLYMERIC JOINT	GATOR MAXX SAND G2	POLYSWEEP X-TREME WIDE JOINT	-	
SIMPLYTOUGH™	SMART SAND	GATOR MAXX SAND & GATOR SUPERSAND BOND G2	POLYSWEEP	-	
WETLOK™	STORM	GATOR NITRO JOINT SAND & GATOR NITRO-X FINE JOINT SAND	HYDROSWEEP & PS11500 RJS	ROMEX® EASY	

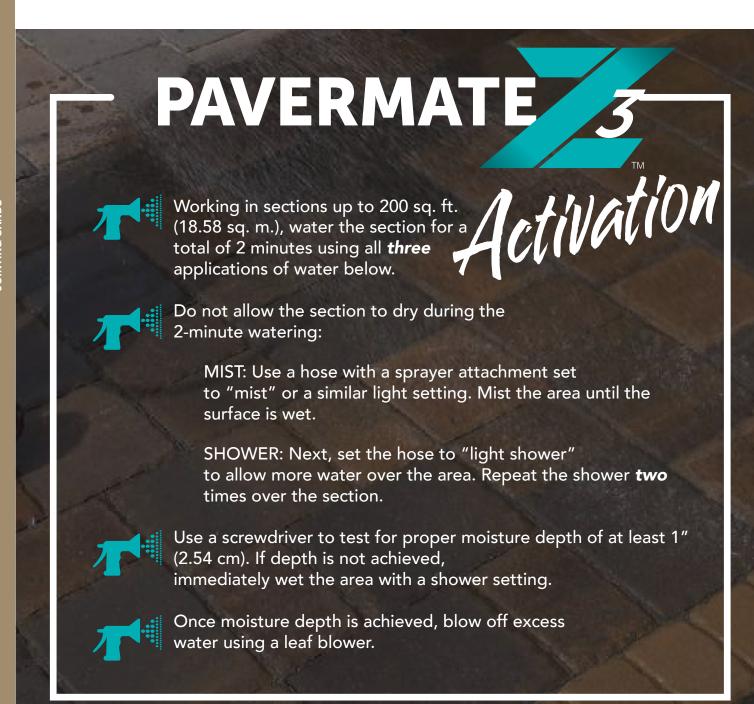

Jointing Sand Coverage Charts





PAVERMATE

FAST ACTING

Scan Here for Installation and Activation Instruction

JOINT WIDTH COVERAGE				
Narrow Joints	55-75 Sq. Ft. (5.11-6.97 Sq. m.)			
Wide Joints	20-30 Sq. Ft. (1.86-2.79 Sq. m.)			





SIMPLYTOUGH

Easy Installation

Scan Here for Installation and Activation Instruction

JOINT WIDTH	COVERAGE
Narrow Joints	55 - 75 Sq. Ft. (5.11 - 6.97 Sq. m.)
Wide Joints	25 - 35 Sq. Ft. (2.32 - 3.25 Sq. m.)





X-TREME™

Wide Joints

Scan Here for Installation and Activation Instruction

JOINT WIDTH	COVERAGE
Wide Joints	20 - 45 Sq. Ft. (1.85 - 4.18 Sq. m.)



WETLOK.

Permeable Jointing Sand

Scan Here for Installation and Activation Instruction

JOINT WIDTH	COVERAGE
1/8"	65 Sq. Ft. (5.11 - 6.97 Sq. m.)
3/16"	55 Sq. Ft. (5.1 Sq. m.)
3/4"	13.5 Sq. Ft. (1.25 Sq. m.)
1"	10.6 Sq. Ft. (0.98 Sq. m.)



JEŚweep

Great for use with WetLok.
JetSweep helps allow constant water flow without the need to hold the hose and broom at the same time.







- Stabilizes Pathways and Patios
- Liquid bonding agent that controls dust
- One easy-to-use formula ideal for both commercial and residential applications
- Minimizes tracking and weed growth

APPLICATIONS

- Decomposed Granite
- Crushed Stone 3/8"-1/4" minus
- Pathways and Patio Areas

COVERAGE

- RESIDENTIAL: Up to 75 sq. ft. per 5 gallons (6.97 sq. m per 18.93 liters).
- COMMERCIAL: Up to 50 sq. ft. per 5 gallons (4.65 sq. m per 18.93 liters).

See page 99 for ordering information

FEATURES

- Water-based
- Joint widths up to 34"
- 2-in-1: seals surface and stabilizes joints
- Eliminates Joint Washout
- Reduces weeds and ant infestation
- Natural-look/Matte finish
- Resists moss, mold and mildew growth
- Residential and Commercial
- See chart on page 36-37

APPLICATION

- Concrete Pavers
- Wetcast
- Clay Pavers

COVERAGE

- Seals and stabilizes standard joints:
 Covers up to 80 -120 sq. ft. per gallon
- Cured polymeric sand:
 Covers up to 125 sq. ft. per gallon





- Locks Mulch in Place
- Easy to Use
- Enhances Color
- Prevents Fading
- Sprays white, dries clear
- Flexible Bond
- Helps prevent weed growth

APPLICATIONS

- Colored and Natural Mulch
- Synthetic Mulch
- Pine Straw
- Sand and Dirt

COVERAGE

• Covers up to 200 sq. ft. per gallon

See page 99 for ordering information



SRW ROCK BINDER

FEATURES

- Use on sand or dirt to control dust in decorative areas
- Surface remains flexible and permeable
- Easy to apply with sprayer (purchased separately)
- Reaches full bond in 24-48 hours
- Allows surfaces to drain and breathe
- Environmentally safe, Low VOC and EPA compliant
- Non-toxic and Breathable
- Safe for Kids, Plants , and Animals
- Reduces Landscape Maintenance
- Controls Dust and Erosion

APPLICATIONS

- Pebbles, Light Rock and Gravel
- Pea Gravel
- Decomposed Granite
- Chip Stone
- Sand and Dirt

COVERAGE

• Covers up to 200 sq. ft. per gallon (18.58 sq. m per 3.78 liters)



FUGENSAND

Jointing Sand & Stabilizing Sealer

Ideal for driveways and interlocking pavers

- 2 in 1 stabilizer/sealer
- Pressure washer safe
- No cement haze/residue
- Works with tight paver joints
- Same installation as poly sand but categorically stronger



Pressure Washer Safe

See page 99 for ordering information



ECOFINE

Resin Jointing Sand

Ideal for pool decks, patios and pathways

- Compatible with any paver
- Resin Film Free
- Highly Water Permeable
- Ready-Mixed
- Pool Chemical Tested
- Easy to use

See page 99 for ordering information



Ant Resistant



Weed Resistant



TRASS BED

Paver Bedding

Ideal for all residential and commercial spaces

- Traffic loads up to 40 T
- Extremely Durable
- Water permeable
- Frost resistant
- 10-Year Warranty Options





10-Year Warranty

Vehicle Rated

See page 99 for ordering information



ADHESION ELUTRIANT

Thin Set

Used in combination with TRASS BED

- Extremely Durable
- Polymer-enhanced
- Contains Trass cement
- Binds to Tile Base

See page 99 for ordering information





No Paver Shifting

Frost Resistant



PROFI-DEKO

Gravel Binder

Ideal for decorative drainage areas

- Washed, dry and dust-free aggregate
- Prevents loose gravel
- For pedestrian & light vehicular loads
- Safe non-slip surface

See page 99 for ordering information



Highly Permeable



D7000

Rock Dust Stabilizer

Ideal for garden pathways and public spaces

- Suitable for aggregates with fines
- Easy topical application
- Reduces erosion on sloped areas
- Prevents dust on gravel surfaces
- Prevents weed growth

See page 99 for ordering information



No Erosion



ADA Compliant



ISATEC ANCHORS

Paver Displacement Tool

Ideal for roads, streets and driveways

- Hot galvanized
- 5-Year Warranty options
- Engineering plans designed by ROMEX
- Eliminate damaged/replacement of pavers

See page 99 for ordering information





No Paver Shifting

5-Year Warranty



GROUT KIT

Joint Installation Tools

For installing ROMEX Jointing Products

- 2 Squeegee heads
- Hand squeegee
- Medium bristle broom head
- Soft bristle broom head
- Hand broom
- Small hand shovel
- Protective tape
- Gloves
- Safety Glasses





Commercial Resin Jointing

Ideal for plazas & medium traffic loads

- For traffic loads up to 7.5 T
- Self-compacting
- Pressure washer safe
- Increased pouring capacity & water emulsifiable

See page 99 for ordering information



Vhicle Rated



FLEX JOINT

Flexible Resin Jointing

Ideal for parking lots & permeable pavers

- Vehicle loading up to 25 T
- Ideal for unbonded construction
- Bonded performance on unbonded application
- Used in combination with our ISATec ANCHORS 5-year warranty

See page 99 for ordering information



Extremely Flexible



D4000 HR

Pothole & Road Repair

Ideal for pothole patches & curb replacement

- For Heavy Traffic Loads (>25t)
- For Joint Depths from 3/8" | 10 mm
- 2 Component Epoxy Resin
- Quick Reopening for Traffic
- Can be Applied During Drizzle
- Can be Applied down to -10 $^{\circ}$ C | 14 $^{\circ}$ F

See page 99 for ordering information







Easy Install



The full ROMEX line can be ordered through SRW Products.
Contact your SRW rep today for more information.

Scan the QR code to see all available ROMEX products!







- Specifically engineered for use with a variety of general purpose cutting conditions
- Standard and premium options available

APPLICATIONS

- Concrete Pavers
- Concrete Block
- Cured Concrete
- Green Concrete (20 Hrs or more)
- Brick/Clay Pavers
- Natural Stone
- Manufactured Stone
- Wetcast
- Retaining Wall Block
- Reinforced Concrete with Wire Mesh

SEGMENT STYLE GUIDE NUMBER AND BLADE SIZE

- Style 1: 4", 4.5", 7", 9", 10", 12", 14"
- Style 3 and 7: 14"
- Style 5: 16.5"
- Style 6: 9"
- Style 8: 4.5", 7"

See page 100 for ordering information

FEATURES


- Designed to cut a variety of materials from concrete and asphalt to stone
- Standard and premium options available
- Can be used on a wide variety of materials

APPLICATIONS

- Asphalt
- Clay Pavers
- Natural Stone
- Manufactured Stone
- Wetcast
- Retaining Wall Block
- Concrete Pavers
- Concrete Block
- Reinforced Concrete with Wire Mesh/Rebar
- Cured Concrete
- Green Concrete (20 Hrs or more)

SEGMENT STYLE GUIDE NUMBER AND BLADE SIZE

• Style 4 and 5: 14"



ABRASIVE MATERIAL BLADES



FEATURES

- Designed for cutting abrasive materials that wear away most blades quickly
- Premium blade for long-term reliability
- For use on even the most abrasive materials

APPLICATIONS

- Asphalt
- Green Concrete (12 hours or less)

SEGMENT STYLE GUIDE NUMBER AND BLADE SIZE

• Style 2: 14"

See page 100 for ordering information

SS.

HARD MATERIAL BLADES

FEATURES

- Fast cutting with minimal spalling
- Standard and Premium Options
- Specifically engineered for use with a variety of general purpose cutting conditions

APPLICATIONS

- Natural Stone
- Concrete Pavers
- Clay Pavers
- Cured Concrete
- Granite
- Bluestone
- Wetcast
- Reinforced Concrete with Wire Mesh/Rebar
- Porcelain*
- High PSI Concrete (5000 or Higher)


SEGMENT STYLE GUIDE NUMBER AND BLADE SIZE

- Style 3: 14"
- Style 6: 12", 14"
- Style 8: 4.5", 14"

*BPPB blades are the only hard material blades designed to cut porcelain

See page 100 for ordering information

SEGMENT STYLE GUIDE



DOUBLE TURBO

. ت



FEATURES

- Single turbo style for increased grinding speed
- Ideal for removing material in high spots

See page 101 for ordering information



 Double turbo style for faster/more aggressive grinding and added diamonds/segments for longer life.



- The more diamond contact to the surface will create a smoother grind.
- The *less* diamond contact to the surface will be a more aggressive grind.
- The faster you move the grinder the less material the cup wheel will remove.
- The **slower** you move the grinder the more material the cup wheel will remove.

BEST PRACTICE

- Lay the cup wheel flat in the surface before turning on the grinder to prevent gouging.
- Keep the cup wheel moving across the surface to prevent overheating.




See page 101 for ordering information

DON'T SEE WHAT YOU NEED? SIMPLY ASK.


We are here to help! Call us at 800.752.9326

EXPOSING NEW DIAMONDS

To restore a dull blade, use a soft concrete block, piece of sandstone, or asphalt surface to dress and sharpen the edge, exposing fresh diamond particles.



S	SRVE PRODUCTS	NATURAL STONE	CONCRETE PAVERS	CLAY PAVERS	WETCAST	MANUFACTURED STONE	BLOCK RETAINING WALLS	HIGH PSI CONCRETE (5000 OR HIGHER)	REBAR REINFORCED CONCRETE	WIRE MESH REINFORCED CONCRETE	GREEN CONCRETE (12 HRS OR LESS)	GREEN CONCRETE (20 HRS OR MORE)	CURED CONCRETE	ASPHALT	PORCELAIN
	GENERAL PURPOSE														
DES	ALL PURPOSE														
BLADES	ABRASIVE MATERIAL														
	HARD MATERIAL														

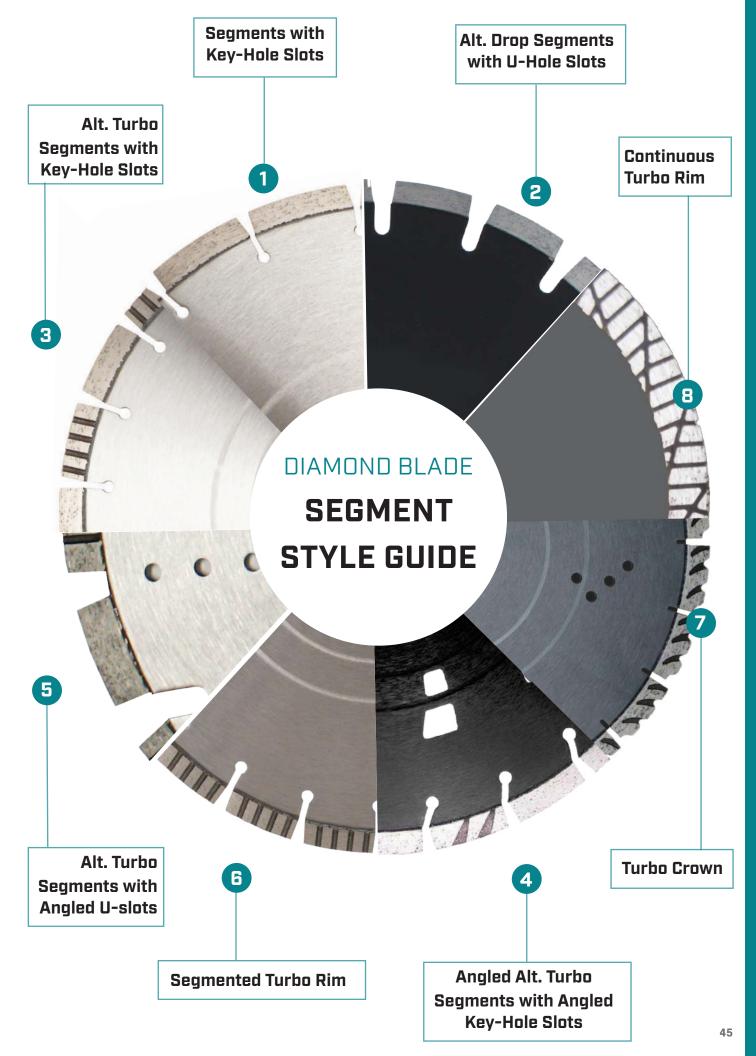

2" CORE BITS Continuous Research Proceedings Continuous Research Procedure Continuous Rese

FEATURES

- Designed for speed
- Wet/Dry Use
- High quality diamonds for smooth cuts

APPLICATION

- High PSI Concrete Pavers
- Poured Concrete
- Granite
- Brick
- Reinforced Concrete
- Concrete Block/CMU

See page 101 for ordering information



FEATURES

- Designed for speed
- Wet/Dry Use
- High quality diamonds for smooth cuts

APPLICATION

- High PSI Concrete Pavers
- Poured Concrete
- Granite
- Brick
- Reinforced Concrete
- Concrete Block/CMU



- Designed for speed
- Wet/Dry Use
- High quality diamonds for smooth cuts

APPLICATION

- High PSI Concrete Pavers
- Poured Concrete
- Granite
- Brick
- Reinforced Concrete
- Concrete Block/CMU

See page 101 for ordering information



FEATURES

- Designed for speed
- Wet/Dry Use
- High quality diamonds for smooth cuts

APPLICATION

- High PSI Concrete Pavers
- Poured Concrete
- Granite
- Brick
- Reinforced Concrete
- Concrete Block/CMU

DON'T SEE WHAT YOU NEED? SIMPLY ASK.

We are here to help! Call us at 800.752.9326

See page 101 for ordering information





- High tensile and shear strength
- Specially designed for use with Seams Right[™]
 Turf Adhesive
- Commercial and Residential use

APPLICATION

- Synthetic Turf
- Putting Greens
- Pet Areas
- Playgrounds
- Landscaping
- Sports Facilities

ROLL SIZES OPTIONS

• 6"x100', 12"x50', 12"x100'


See page 101 for ordering information

FEATURES

- 5" 40D Smooth Bright Steel Nail: Rusting starts in soil to secure turf better
- 6" 60D Spiral Galvanized Steel Nail: Resistant to rust making turf maintenance easier
- Commercial and Residential use
- Suitable for all soil types
- More durable than cheap alternatives that bend on installation

APPLICATION

• Turf

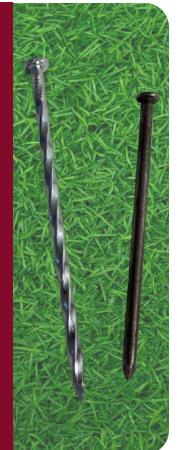



- Moisture Curing
- Weather Resistant
- Fast Setting
- Interior/Exterior
- VOC Compliant

APPLICATION

- Synthetic Turf
- Putting Greens
- Pet Areas
- Playgrounds
- Landscaping


COVERAGE:

• 3/8" bead = 35'

See page 101 for ordering information





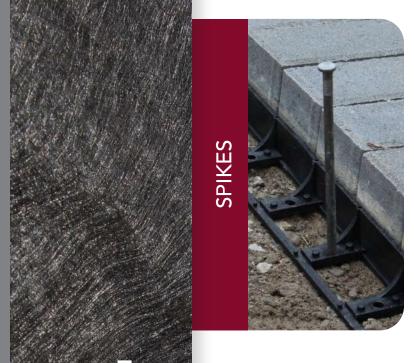

- Smooth or Spiral
- Bright or Galvanized Finishes
- 10" and 12" Lengths

APPLICATIONS

- UltraLok Paver Rail™
- Paver Rail[™]
- Timber

OPTIONS

• A, B, C, D

See page 102 for ordering information



FEATURES

- Many sizes with convenient packaging options
- Bulk and Carton Options

APPLICATIONS

- Fabric
- Geogrid
- Erosion control product installation
- Irrigation
- Newly Laid Sod
- 1/4" 1/2" Dripline Tubing

OPTIONS

• E, F, G

See page 102 for ordering information



FEATURES


- Large Diameter Head
- 6" Length

APPLICATIONS

- Fabric
- Erosion Control Blankets
- Newly Laid Sod

OPTIONS

•

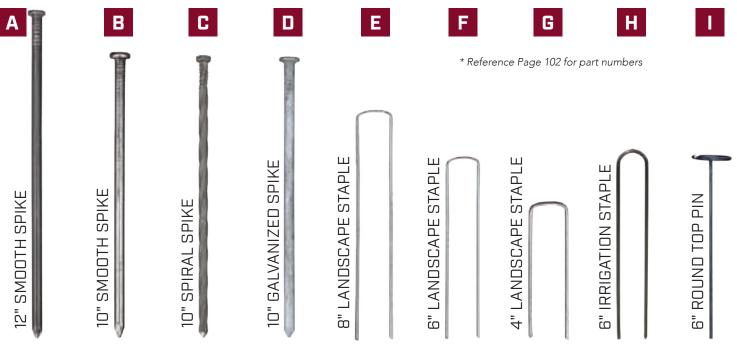



TURF NAILS

BENDA BOARD STAKES

FEATURES

- 5" 40D Smooth Bright Steel Nail: Rusting starts in soil to secure turf better
- 6" 60D Spiral Galvanized Steel Nail: Resistant to rust making turf maintenance easier
- Commercial and Residential use
- Suitable for all soil types
- More durable than cheap alternatives that bend on installation

APPLICATION

• Turf

See page 102 for ordering information



FEATURES

- Many sizes with convenient packaging options
- Bulk and Carton Options

APPLICATIONS


- Fabric
- Geogrid
- Erosion control product installation
- Irrigation
- Newly Laid Sod





EROSION CONTROL BLANKETS AND STAPLE PLACEMENTS


Reference these diagrams for the correct staple placements upon installation of any of our erosion control blankets. See page 75 for further information.

Full instructions available on the our website. SRWProducts.com











FEATURES

 Magnetic ends keep the pin in place

APPLICATION

• Use with round top pins



Bending Over, Stepping on Staples, Bending Staples, or Fatigue with our **Pin Pounder** and **Staple Setter**



See page 103 for ordering information

FEATURESMagnetic

Magnetic ends keep the staples in place

APPLICATION

 Use with 11 gauge, 1" wide steel staples of any length



See page 103 for ordering information

STAPLE SETTER

- Makes raising and lowering the string-line elevations easy
- Easily visible from a distance, unlike pencil marks
- Take down the line and put it back up without measuring
- Ability to create three to four different lines from the same point
- Built to last from nylon with a brass insert and zinc coated thumbscrew
- Fits round stakes up to 1"

APPLICATION

- Hardscaping
- Surveying
- Fencing
- Concrete and Masonry

See page 103 for ordering information

STRINGALONG[™] STAKES



FEATURES

- 24" tall, 34" round steel
- Holes for quick nailing
- Pointed Tip
- Reusable

APPLICATION

- Concrete and Masonry
- Setting Line Levels
- Use with SRW Products StringAlong[™]
- Plant Support
- Surveying

See page 103 for ordering information



STRINGALONG™ ARE PERFECT FOR: HARDSCAPING, **SURVEYING, FENCING, CONCRETE AND MASONRY**

The SRW Products StringAlong™ collar makes it effortless to raise and lower elevations. Featuring small teeth and a lock notch to ensure a secure string line. These collars are highly



visible from a distance, making them a better option than pencil marks. Create three to four different lines from various directions simultaneously. It fits round stakes with a diameter of up to 1 inch. You can easily remove and reattach the line without the need for measuring. For optimal results, pair with StringAlong™ Stakes.







- Most popular fabric line
- Excellent water flow/ permittivity
- Easy to cut, Easy to use
- Puncture and tear resistant
- Weed Control
- Commercial Grade
- Strength and Versatility

APPLICATION

- General Landscaping
- Gardens/Planters
- French Drains/Drainfields
- Behind Retaining Walls

ROLL SIZE OPTIONS

• SB2: 3', 4', 6', 12'

• SB3: 3', 4', 6', 8', 12'

See page 103 for ordering information

FEATURES

- Excellent water flow/ permittivity
- Easy to cut, Easy to use
- Puncture and tear resistant
- Weed Control
- Commercial Grade
- Strength and Versatility

APPLICATION

- General Landscaping
- Gardens/Planters
- French Drains/Drainfields
- Behind Retaining Walls

ROLL SIZE OPTIONS

• Silver: 3', 4', 6'

• Silver Elite: 3', 4', 6', 9', 12', 15'

• Silver Premier: 3', 4', 6', 12', 15'





PS1.5 • 15 YEAR PS2 · 20 YEAR PS3 · 30 YEAR

WEED CONTROL • POLYSPUN

FEATURES

- Weed Barrier
- Allows air, water and nutrients to pass through
- Promotes healthy plants by reducing weed growth
- Point-Bonded Non-Woven

APPLICATION

- Underlayment for Mulch and Decorative Rock
- Gardens and Landscapes
- Separation

ROLL SIZE OPTIONS

• PS1.5: 3'



See page 104 for ordering information

FEATURES

- Weed Barrier
- Allows air, water and nutrients to pass through
- Promotes healthy plants by reducing weed growth
- Point-Bonded Non-Woven

APPLICATION

- Underlayment for Mulch and Decorative Rock
- Gardens and Landscapes
- Separation

ROLL SIZE OPTIONS

• PS2: 3', 4', 6', 8'



See page 104 for ordering information

FEATURES

- Highest Quality Fabric
- Weed Barrier
- Allows air, water and nutrients to pass through
- Promotes healthy plants by reducing weed growth
- Point-Bonded Non-Woven

APPLICATION

- Underlayment for Mulch and Decorative Rock
- Gardens and Landscapes
- Separation

ROLL SIZE OPTIONS

• PS3: 3', 4', 6', 8', 12'





- Strength of a woven, permittivity of a non-woven
- Colored planting stripes make spacing quick and
- Retains moisture for plant health
- Weed Control
- Can be left exposed

APPLICATION

- Soil/Landscape Stabilization
- Weed Barrier Under Landscape Beds, Gardens, Decks, Patios and Sidewalks

ROLL SIZE OPTIONS

- Pro Plus IV™: 3', 4', 6', 12'
- Folded Options Available

See page 104 for ordering information



PPV

FEATURES


- Commercial
- Strength of a woven, permittivity of a non-woven
- Colored planting stripes make spacing quick and
- Retains moisture for plant health
- Weed Control
- Can be left exposed

APPLICATION

- Soil/Landscape Stabilization
- Weed Barrier Under Landscape Beds, Gardens, Decks, Patios and Sidewalks

ROLL SIZE OPTIONS

- Pro Plus V[™]: 3', 4', 5', 6', 8', 12'
- Folded Options Available

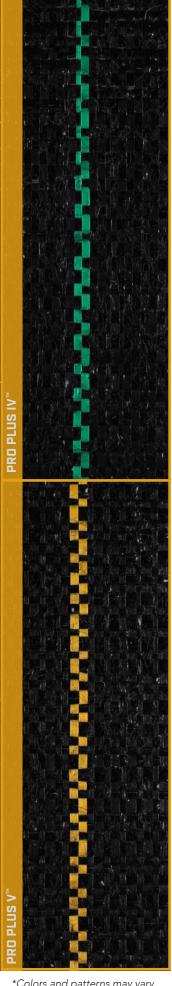

*Colors and patterns may vary

GROUND COVER • WOVEN

FEATURES

- Highest UV resistance
- Planting stripes make spacing easier
- Can be left exposed
- Weed Control

APPLICATION

- Greenhouse
- Nurseries
- Farming
- Garden Paths
- Patios
- Sidewalks

ROLL SIZE OPTIONS

- GC3™: 3', 4', 6', 10', 12', 15'
- 12' x 300' Folded Option available



See page 104 for ordering information

FEATURES

- Highest UV resistance
- High Strength
- Convenient size in folded width
- Planting stripes make spacing easier
- Can be left exposed
- Weed Control

APPLICATION

- Greenhouse
- Nurseries
- Farming
- Garden Paths
- Patios
- Sidewalks

ROLL SIZE OPTIONS

• GC Pro[™]: 3', 4', 6', 10', 12', 15.5'



*Colors and patterns may vary



- Allows high water flow
- Soil-separation for added stability
- Promotes healthy vegetation
- Rot and Mildew Resistant

APPLICATION

- Separation
- Filtration
- General Landscape

ROLL SIZE OPTIONS

• LS3™: 3', 4', 6', 9', 12'

See page 105 for ordering information



FEATURES

- Allows high water flow
- Soil-separation for added stability
- High-strength/dimensionally stable
- Rot and Mildew Resistant

APPLICATION

- French Drains
- Erosion Control
- Behind Retaining Walls
- General Landscape

ROLL SIZE OPTIONS

- NW4 and NW4.5: 3', 4', 6', 12.5', 15'
- NW6: 6', 10', 12.5', 15'

See page 105 for ordering information



EC8

FEATURES

- Allows high water flow
- Soil-separation for added stability
- High-strength/dimensionally stable
- Rot and Mildew Resistant

APPLICATION

- Heavy Rip-Rap/Boulder Retaining Wall
- Stabilization/Separation
- Underlayment
- Erosion Control

ROLL SIZE OPTIONS

• EC8™: 6', 12.5', 15'

See page 105 for ordering information



NON-WOVEN

- Heavy rip-rap/boulder retaining walls
- Separation for Roads
- Slope Reinforcement
- Shoreline Erosion Control
- Landfill
- Pond Underlayment



BOULDER RETAINING WALLS



POND UNDERLAYMENT




DRAINAGE AND FILTRATION

HEAVY RIP-RAP

WOVEN GOOD FOR:

• Embankment Stabilization

- Roads and Railways Support
- Structural support for retaining walls
- Land Reclamation
- Separation, Stabilization, and Reinforce



SEPARATION FOR ROADS



ROAD SUPPORT



SERVICE ROADS



STABILIZATION FOR RET. WALL FOOTING

FOR DOT SPECIFIC FABRIC

Contact your Territory Sales Representative



- High Strength
- Meets most DOT specs
- Improves long-term performance of projects
- Excellent puncture and tear resistance
- Can reduce amount of base materials required

APPLICATION

- Stabilize paver projects/underlayment
- Separation between subsoil and base
- Base reinforcement for roads, driveways and sidewalks
- Works great in structural support for retaining wall base

ROLL SIZE OPTIONS

- **SS5**: 4', 6', 12.5', 15', 17.5'
- Folded Options Available



See page 106 for ordering information

TRADITIONAL INSTALLATION OF SS5 FABRIC UNDER PAVERS Concrete Pavers Pavermate 23** Pavermate 24** Pavermat

- High Strength
- High water flow
- Improves long-term performance of projects
- Excellent puncture and tear resistance
- Stabilization/Separation/Reinforcement

APPLICATION

- Permeable Paver Projects
- Base reinforcement for roads, driveways and sidewalks
- Hybrid Base
- Open Graded Base

ROLL SIZE OPTIONS

• Permeable 350™: 6.25′, 12.5′






See page 106 for ordering information



FABRIC FOR PERMEABLE INSTALLATIONS INCLUDING HYBRID AND OPEN GRADED BASE

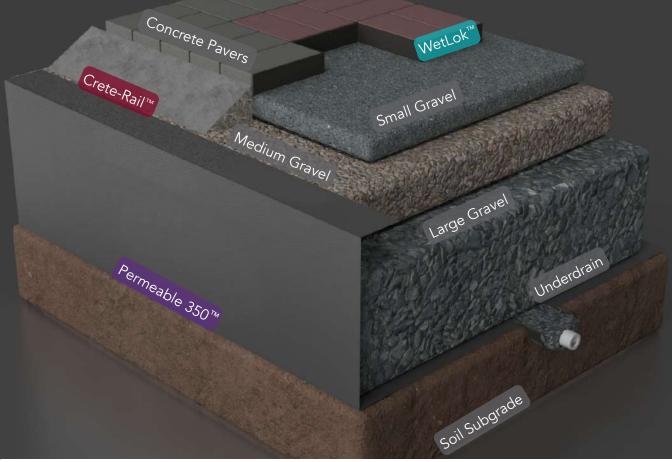

FABRIC

CHOOSE YOUR FABRIC



General Landscape

Primary Use

Under Rock/Mulch French Drains Drainfields

Spunbond



Weed Control

Primary Use

Weed Control Under Rock/Mulch

Polyspun



Premium Landscape

Primary Use Woven/Non-Woven

Landscape Beds Gardens Patios Sidewalks



Ground Cover

Primary Use

Landscape Beds Nursery Farming

Farming Gardens

Woven

Woven

Patios Sidewalks



Stabilization/Separation

Primary Use

All Paver Projects Roads Driveways Retaining Wall Base

Non-Woven

Primary Use

Drainage Rip-Rap
Filtration Erosion Control
General Stabilization
Landscaping Separation





Construction ROIS

SRW Products proudly offers many options of woven and non-woven construction sized fabric rolls

ROLL SIZE OPTIONS

WOVEN

- **NW4:** 12.5' x 360', 15' x 360'
- **NW4.5:** 12.5' x 360', 15' x 360'
- **NW6:** 12.5' x 360', 15' x 300'
- **NW7:** 15' x 300'
- EC8TM: 12.5' x 360', 15' x 300'
- **NW10:** 12.5' x 360', 15' x 300'
- **NW12:** 12.5 x 360', 15' x 300'
- **NW16:** 12.5' x 360', 15' x 150', 15' x 300'


NON-WOVEN

- **SS5:** 12.5' x 432', 15' x 360', 17.5' x 309'
- **\$\$6:** 12.5' x 360', 15' x 300', 17.5' x 258'
- SRW 270HPTM: 15' x 300'
- **SRW 370HPTM:** 15' x 300'
- SRW 570HPTM: 15' x 300'
- SRW MM402TM: 12' × 300'
- SRW MM403TM: 15' × 300'
- SRW MM700TM: 12' x 300'



FABRIC

SRW# Fabric & Geogrid

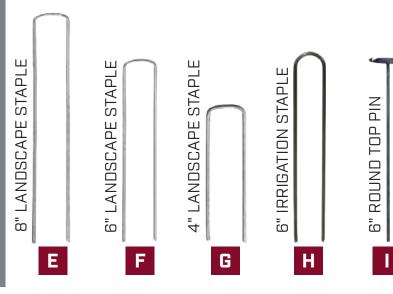

*Reference page 102 for part numbers

FEATURES

- Dimensions: 72" H x 28 1/4" W x 27" D
- Quality heavy-duty construction, to easily handle SRW Products fabric and geogrid
- Four metal shelving arms to conveniently hold rolls
- Sign Channel to hold product labels (ordered separately)
- Powder coat finish: semi-gloss black
- Header Sign Set Conveniently packaged with the display

Contact your Territory Sales Representative today about the qualifications required to get a display.

See page 106 for ordering information



SRWE PRODUCTS	SEPARATION	GENERAL LANDSCAPING	WEED CONTROL	PLANTERS/ PLANTING BEDS	EXPOSED GARDENS	STABILIZE BASE UNDER DRIVEWAY & RETAINING WALL	STABILIZATION & REINFORCEMENT	UNDERLAYMENT FOR MULCH & ROCK	FRENCH DRAINS/ DRAINFIELDS	BELOW HEXABASE" SEPARATION	HEAVY RIP-RAP & BOULDER WALLS	FILTRATION
APPLICATION	SEP	E A	WE	4 전 전 전	A S	STA UNI & R	STA	N Q %	FR S	田 田 田 田 田 田 田 田 田 田 田 田 田 田 田 田 田 田 田	BO HE	문
GENERAL LANDSCAPE SB2, SB3, Silver, Silver Elite, Silver Premier												
WEED CONTROL PS1.5, PS2, PS3												
PREMIUM LANDSCAPE PPIV", PPV"												
CROUND COVER GC3", GC PRO"												
STABILIZATION/SEPARATION SS5, SS6, Permeable 350"												*
NON-WOVEN LS3", NW4, NW4.5, NW6												
NON-WOVEN NW7, EC8™, NW10, NW12, NW16												
*Only applies to Perm 350 fabric	·											

SZWE	LANDSCAPE FABRIC: CROSS REFERENCE									
PRODUCTS	CGI	DEWITT	FABRISCAPE	HANES	CHEROKEE					
SB2	211 Series (2.1oz)	Premium Weed Control (1.9oz), Typar Premium 3201 (1.9oz), Contractor's Select (1.9oz)	Commercial Weed Stopper (2oz)	Pro Steel (2oz)	2oz Polyester Spunbond					
SILVER	-	-	-	Pro Silver (2oz)	3oz Polyester Spunbond					
SB3	296 Series (2.1oz)	Premium Weed Control (2.5oz Grey), Typar Professional 3301 (3oz), Contractor's Select Plus Black (2.5oz)	Professional Landscape Fabric (3oz)	Pro Steel Plus (2.7oz)	3oz Polyester Spunbond					
SILVER ELITE	-	Contractor's Select Plus Grey (2.5os)	-	Pro Steel Plus (2.7oz)	-					
SILVER PREMIER	-	-	-	-	-					
PS1.5	180 Series (1.7oz)	Standard Weed Control (1.5oz)	-	-	-					
PS2	-	-	-	Pro Ion	2oz Polyspun					
PS3	395 Series (3oz)	Dewitt Professional Weed Control Black, EarthTone (3oz), Dewitt Weed-Barrier Pro (Black/Black)(Black/ Brown) (3oz)	-	Pro Ion Plus (2.8oz)	3oz Polyspun					
PRO PLUS IV	450 Series (4.1oz)	Professional Max Weed Control (4.1oz)	Woven Weed Restrictor (4.1oz)	Pro Platinum	3oz Polyester Spunbond					
PRO PLUS V	500 Series (5oz)	Pro 5 Weed-Barrier (5oz)	Woven Weed Restrictor Plus (4.75oz)	Pro Platinum Plus	2oz Polyspun					
GC3™ 3oz Ground Cover		-	-	Pro Gold (3oz GC)	-					
GCPRO™	-	SunBelt (3.2oz)	Woven Ground Cover (3.2oz)	-	320 Series (3.1oz)					
LS3™	-	-	Professional Non-Woven (3.1oz)	-	-					

PRODUCTS CONSTRUCTION ROLLS: CROSS REFERENCE	MIRAFI	WILLACOOCHE	US FABIRICS	SKAPS
NW4	140NC	400N	US 100NW	GT 140
NW4.5	140N	450N	US 120NW	GT 142
NW6	160N	600N	US 160NW	GT 160
NW7	170N	700N	US 180NW	GT 170
EC8	180N	800N	US 205NW	GT 180
NW10	1100N	1000N	US 250NW	GT 110
NW12	1120N	1200N	US 300NW	GT 112
NW16	1160N	1600N	US 380NW	GT 116
SS5	500X	200W	US 200	SW 200
SS6	600X	315W	US315	SW 315

These cross-reference tables are for comparison only. This information has been obtained from the manufacturers' literature or website. It is the users' responsibility to verify that this is the most current information. All final geogrid/construction comparisons should be determined by a licensed design engineer.





- Adds strength and longevity to retaining walls and steep slopes
- Easy-to-handle roll sizes
- Helps prevent wall failure
- Provides excellent load transfer

APPLICATION

- Retaining Walls
- Steep Slopes
- Sub-Grade Stabilization
- Bi-Directional

ROLL SIZE OPTIONS

- Universal: 3', 4', 6'
- 3 Series: 4', 6', 12'

See page 107 for ordering information



UNI-DIRECTIONAL

FEATURES


- Adds strength and longevity to retaining walls and steep slopes
- Helps prevent wall failure
- Provides excellent load transfer

APPLICATION

- Retaining Walls
- Steep Slopes
- Uni-Directional

ROLL SIZE OPTIONS

• 5-11 Series: 6', 12'

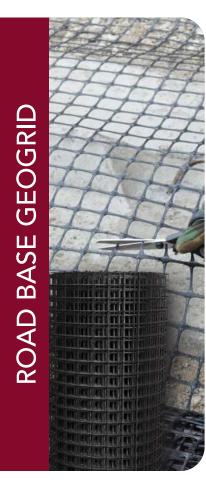

- Provides excellent stress transfer on roadway projects
- Stabilizes and Reinforce Road Base
- Increases Road Life-span
- Reduce effect of freeze/thaw cycles

APPLICATION

- Sub-Grade Stabilization
- Soft Soils Under Embankments
- Roads
- Driveways
- Parking lots

ROLL SIZE OPTIONS

• Type 1: 12.9' x246'

Type 2: 12.9' x164'3D Grid T: 12.9' x246'

• 3D Grid HT: 12.9' x246'

• 3D Grid XL: 12.9' x164'


See page 107 for ordering information



INSTALLING DIFFERENT GEOGRID TYPES


Note: Follow the proper installation. Never overlap Geogrid in retaining walls.

Bi-Directional (Universal and 3 Series)

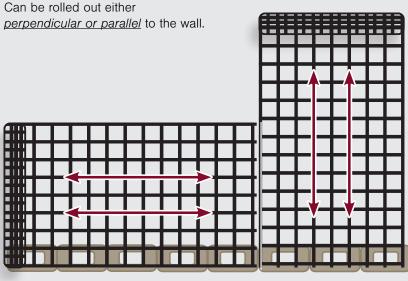

Uni-Directional (5-11 Series)

Must be rolled out perpendicular to the wall.



Bi-Directional Installation Example: parallel or perpendicular to wall

Uni-Directional Installation Example: perpendicular to wall

WE REINFORCE HARDSCAPES RIGHT

PAVERMATE Z3T

Fill paver joints of 1/16" - 2" with polymeric sand to create strong, durable & long-lasting results.



CONCRETE PAVERS

CONCRETE PAVERS

1" BEDDING SAND

BASE 50% REDUCED

1" BEDDING SAND

PAVERMATE Z3T

ULTRA DRIVE

Reduce base excavation & fill in poor soil conditions, plus it's easy to install.

BASE 50% REDUCED

BASE UNCOMPACTED

SS5

BASE UNCOMPACTED

SS5

Use to separate base from sub-soil while increasing strength of project.



SOIL SUBGRADE

SOIL SUBGRADE

RETAINING WALL

NW4.5

GEOGRIO

REINFORCED SOIL

ADHESIVE

Use SRW Products adhesives to adhere retaining wall caps for optimal results.



NW4.5

Use as separation at the top of the wall to prevent soil migration into the drainage aggregate.



REINFORCED SOIL

DRAINAGE AGGREGATE

WALL DRAIN PRO®

A simple, more effective wall drain that is visually pleasing.



WALL DRAIN PRO DRAINAGE AGGREGATE

GEOGRID

GEOGRID

Stabilize retaining walls, preventing wall failure & increasing life span.



DRAIN TILE

LEVELING PAD

SS5


Use to separate base from sub-soil while increasing strength of project.





LEVELIN

SRW# PRODUCTS	LONG TERM DESIGN STRENGTH	APERTURE SIZE (AVG)	DESIGN STRENGTH	WIDE WIDTH TENSILE STRENGTH	ROLL WIDTH	COMPARATIVE PRODUCTS
GEOGRID: SPECIFICATIONS	LB/FT, MD	MD X CMD	RFCR/RFID/RFD	% ULTIMATE, MD	FT	-
UNIVERSAL	688	1204	2193	2866	3,4,6	-
3 SERIES	1204	SF20	2XT	UX 1100	4,6,12	MIRAFI 2XT Strata SGU30/SG150
5 SERIES	2193	SF35	3XT	UX 1400	6,12	MIRAFI 3XT Strata SGU40/SG200
7 SERIES	2866	SF55	5XT	US 1500	6,12	MIRAFI 5XT Strata SGU60/SG350
8 SERIES	3555	SF65	7XT	UX 1600	6,12	MIRAFI 7XT Strata SGU80/SG500
9 SERIES	4587	SF80	8XT	UX 1700	6,12	MIRAFI 8XT Strata SGU110/SG550
10 SERIES	SGU120	SF90	-	UX 1800	6,12	Strata SGU120
11 SERIES	SGU150/SG650	SF110	10XT	-	6,12	MIRAFI 10XT STRATA SGU150/SG650

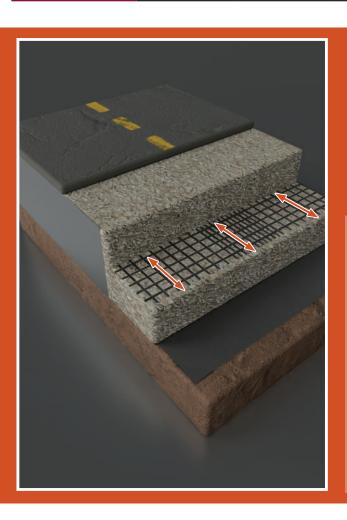



SAMPLE ROAD BASE GRID PLACEMENT

During installation, the Road Base Geogrid should be placed in the direction of travel. It needs to overlap at least 6". Always use staples to keep the grid lying flat.





You may have heard some differing opinions on geogrid in the hardscape industry. Our team of experts want to make sure you have the solid facts. Scan here to watch.





Avoid Failed Walls

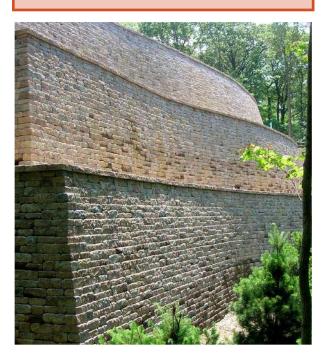



Mhat is Geogria?

Retaining wall Geogrid strengthens retaining walls by reinforcing the soil behind the retaining wall block. This process is similar to how rebar reinforces concrete. The geogrid essentially 'locks' the soil in place, preventing it from shifting and increasing the overall stability of the wall. The reinforced soil becomes part of the retaining wall's weight and mass.

The height threshold for a retaining wall that does not require geogrid may be lower than you think, depending on the site configuration and soil type. Understanding this and using the correct type and amount of geogrid to prevent wall failure is crucial to the success of your project.

Our geogrids are the best choice to add strength and longevity to your hardscape projects while providing superior stress transfer.





- Heavy duty interlocking base replacement panel
- 100% virgin HDPE
- 30x stronger than foam panels
- Save time and money on excavation, fill material, and long term maintenance costs
- 100% permeable: will not trap moisture like foam panels
- Conforms to standard guidelines for paver installations
- Designed to be used with traditional or concrete edging
- Highly resistant to freeze/thaw cycles

APPLICATION

- Standard Paver Installations
- Overflow Parking Area
- Grass/Gravel Driveways
- Fire Access Lanes
- Golf Course Cart Paths
- Barn Floor Erosion Control
- Hiking Trail Slope Stabilization
- Feedlot Erosion Control

PANEL DIMENSIONS


• 19.75" x 19.75" x 1.9" to cover 2.7 sq. ft.


INTERLOCKING BASE REINFORCEMENT

See page 108 for ordering information



BASE REPLACEMENT SYSTEM

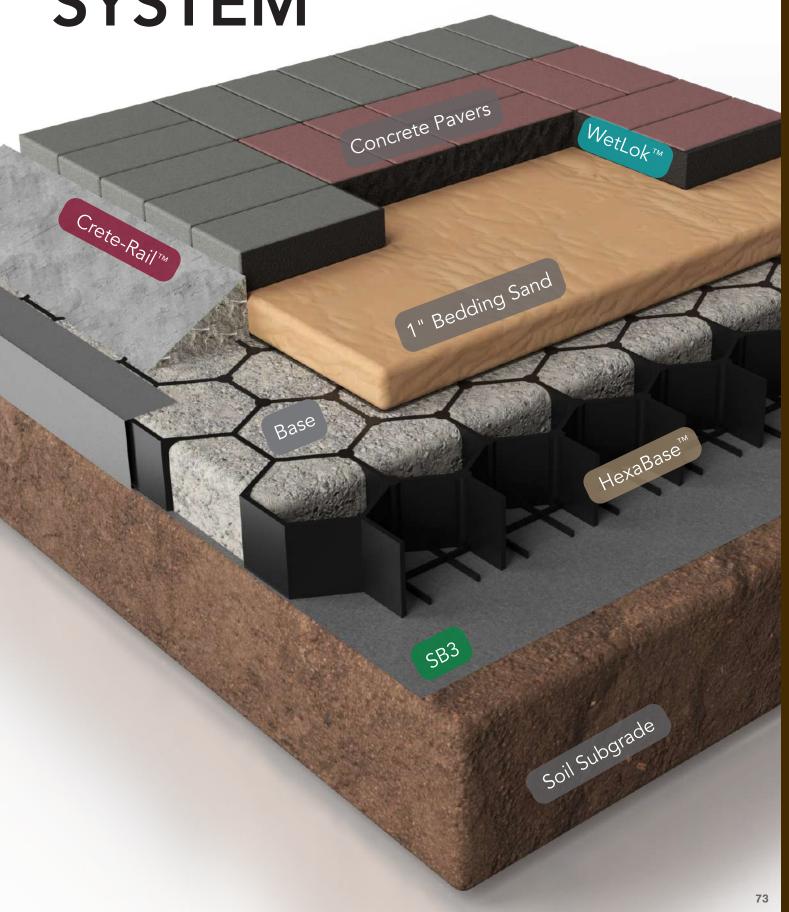

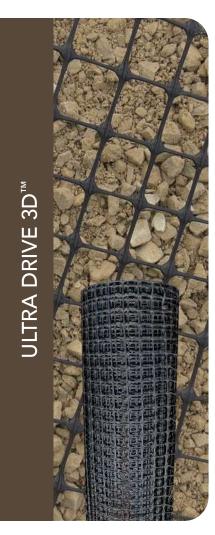

- Conforms to standard guidelines for paver installation process
- Reduces base excavation and fill up to 50%* in poor base soil
- Significantly reduces the effect of freeze/thaw cycles on driveways
- Installs easily, no special procedures needed
- Strongest driveway grid in the market

APPLICATION

- Paver Driveways
- Asphalt Driveways
- Concrete Driveways
- Gravel Driveways
- Hybrid Installations
- Parking Lots

ROLL SIZES OPTIONS

Ultra Drive 3D™: 6.5′, 12.5′,



*Base reduction may vary depending on location/area and soil quality

THREE-DIMENSIONAL DRIVEWAY GRID

See page 108 for ordering information

PAVER INSTALLATION WITHOUT ULTRA DRIVE 3D™

JATER SAND (AFTER COMPACTION)

UP TO 12" BASE FILL MATERIAL**

SEPARATION FABRIC (SS5 WOVEN)

COMPACTED NATIVE SOIL

PAVER INSTALLATION WITH ULTRA DRIVE 3D™

3/4" BEDDING SAND (AFTER COMPACTION)

5" BASE FILL MATERIAL**


ULTRA DRIVE 3D**

1" BASE FILL MATERIAL

SEPARATION FABRIC (SS5 WOVEN)

COMPACTED NATIVE SOIL

DRIVEWAY GRID SYSTEM

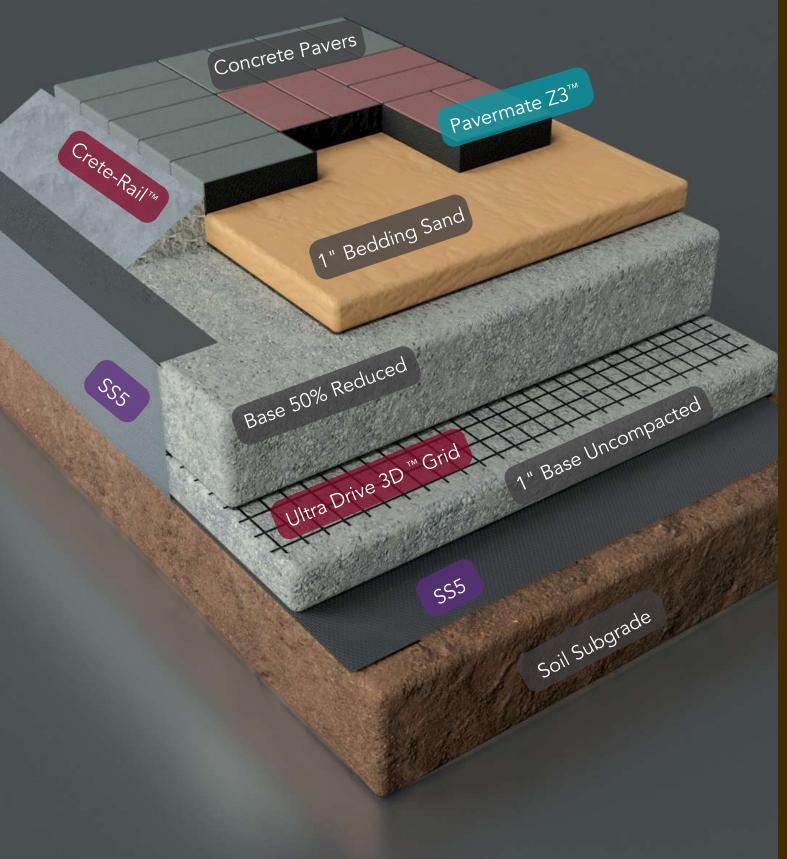



- A simple, more efficient wall drain
- Visually Pleasing Design
- No round cuts needed
- Works with blocks up to 8" tall

AVAILABLE IN

BLACK

TAN

GRAY

APPLICATION

- Retaining Walls
- Free Standing Walls
- Timber Walls

See page 108 for ordering information

EARTHWORKSTh



FEATURES

- Creates a mechanical connection with geogrid
- Works on standard concrete block
- Saves Time and Money
- Provides Strength and Longevity
- Easy to use and install
- Works on any size wall

APPLICATION

• Retaining Walls

See page 108 for ordering information



WALL DRAIN PRO® VS REGULAR DRAIN

A simple plunge cut is all you need for a visually appealing and efficient solution for daylighting drain pipes in retaining wall systems. Comes in multiple color options to match the block. The back end easily snaps into a 4" drain tile.



7/5





- Integrates stable fence footings into the support structure of a segmental retaining wall (SRW)
- Maximizes Land Use
- Stackable and Portable
- Easy to Install
- Made with recycled material
- Code compliant: IBC 1015.2, IBC 1607.8.1, and ASCE 7 4.5.1.


APPLICATION

Retaining Wall Fencing

See page 108 for ordering information

SLEEVE-IT by STRATA


INSTALLATION GUIDELINES




- Prepare a level surface area behind the wall face where the fence post is to be placed.
- The area should be approximately 16" wide by 32" deep.
- The elevation of the base of the Sleeve-It should be approximately 24" below the proposed top of the wall (not including the capstone).




- Place the Sleeve-It unit on the level surface in an upright position with the front edge of the unit flush against the back of the wall.
- Multiple units should be spaced in accordance with fence specifications.
- Do not remove perforated lid until ready to place post.
- Do not step on perforated lid, as this could cause serious bodily injury.




 Encapsulate & stabilize the Sleeve-It unit by placing & compacting sufficient backfill material layers as required.




 If geogrid is required, slit the geogrid perpendicular to the wall face just enough to fit around the base of the unit while ensuring that the geogrid remains properly attached to the wall.



 Continue the backfilling process as directed until the material reaches the top of the tower.




 Punch the perforated lid using a mallet or hammer to expose the inside of the Sleeve-It unit. Detached lids can be left inside the unit or discarded prior to pouring of infill material.



- Place post through the exposed area and rest on the flat ground surface area inside the Sleeve-It cavity.
- Ensure that the post is upright and level and hold in place while carefully pouring infill material, such as concrete, through the exposed cavity
- Follow guidelines specified by infill supplier.
- Concrete is highly recommended as infill material.



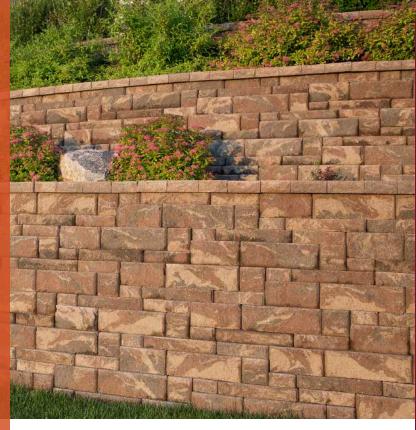

GET STARTED TODAY

1. Download a form from our website:



2. Email completed form to CustomerService@SRWProducts.com

PRELIMINARY DESIGN FORM NOTES:


- ► If the project is simple & just cross sections are required, we may be able to get enough information over the phone
- ► For more complex site configurations, a sketch or grading plans may be needed
- ► If a material estimate is desired, a more complete sketch or grading plan will be needed

Interested in more ways we can help?
Ask us about Stamped Engineering for under \$600!



TAKE THE GUESSWORK OUT OF RETAINING WALL ESTIMATES.

Use our FREE preliminary wall design service to prepare accurate retaining wall estimations using SRW Products. Preliminary designs can be performed with OVER 70 different types of retaining wall units.

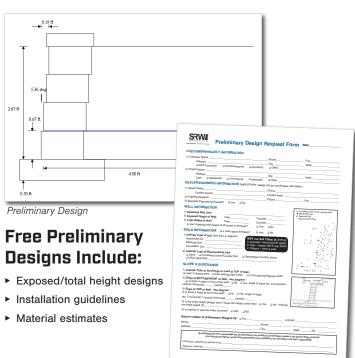


Preliminary Design Form



WE'VE CREATED PRELIMINARY DESIGNS FOR HUNDREDS OF DIFFERENT BLOCKS.


See page 109 for ordering information

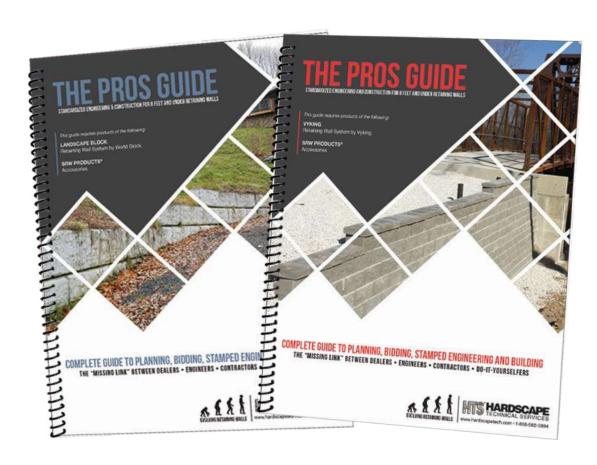

FEATURES

HTS PROS GUIDE

- The Pros Guide shows how to plan, estimate materials and build quality retaining walls 8 feet and under. This step-by-step guide makes it easy for you and your customers to achieve stamped engineering for under \$700.
- Order yours today through your Territory Sales Representative

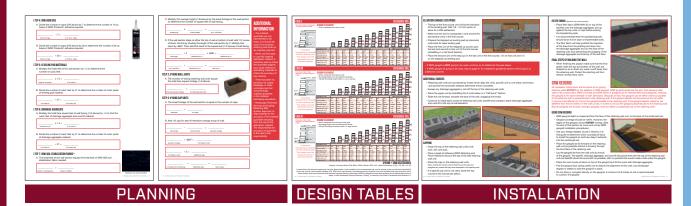

Stamped engineering is available for the retaining wall blocks featured in The Pros Guide.

Refer to the Pros Guide for more information on walls that will qualify for Stamped Engineering with HTS.


*May apply to walls that are 8 feet and under.



STAMPED WALL ENGINEERING

IN AS LITTLE AS 7 DAYS!

Building codes often require a building permit and structural wall design prepared by a qualified engineer for retaining walls as short as 2' in exposed height. Requirements will vary but Hardscape Technical Solutions makes this process quick and easy.

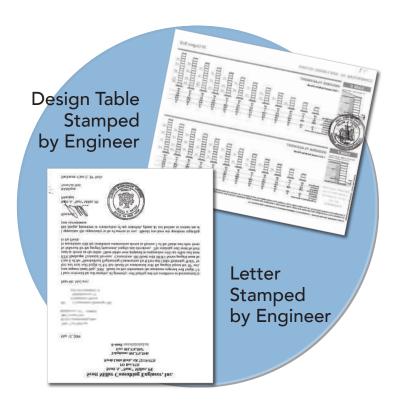

To find out more and connect with our engineers visit:



hardscapetech.com







- A simple, more efficient wall drain
- Visually Pleasing Design
- No round cuts needed
- Works with blocks up to 8" tall

APPLICATION

- Retaining Walls
- Free Standing Walls
- Timber Walls

AVAILABLE IN

BLACK

TAN

GRAY



FEATURES • Commerci fabric

- Commercial-grade polyester geotextile drainage fabric
- High Puncture Resistance
- High Water Flow
- Excellent Filtration


APPLICATIONS

- Septic Systems
- Drainfields
- French Drains

ROLL SIZES OPTIONS

- DF1.5: 3', 4', 5', 6', 12'
- DF2: 3', 4', 6', 12'

See page 102 for ordering information



See page 110 for ordering information

- Superior alternative to pipe and stone drainage systems - 10x inflow capacity
- Reduce and redirect subsurface water
- Reduce subsurface hydrostatic pressure
- Creates continuous flow path to designated drainage exits
- Effective in vertical and horizontal applications
- Single or double sided available

APPLICATION

- Structural Walls
- Under Hardscape and Paving
- Lagging and Shoring Walls
- Shotcrete and Gunite Walls
- Embankments
- Synthetic Turf

See page 102 for ordering information

See page 110 for ordering information



AMERICAN WICK DRAIN

FEATURES

- Superior alternative to pipe and stone drainage systems - 10x inflow capacity
- 70% less excavation (Excavation volume per foot for standard pipe and stone drain)
- Reduce and redirect subsurface water
- Reduce subsurface hydrostatic pressure
- Creates continuous flow path to designated drainage exits
- Fully wrapped dimple strip drain

APPLICATION

- Lawn and Turf Drainage
- Athletic Fields Natural or Synthetic Turf
- Playgrounds
- Roadway Edge Drain
- Soil Consolidation

See page 102 for ordering information

See page 110 for ordering information



FEATURES

- 12.5 gpm/ft water flow rate
- Low-profile design, 0.315" (8mm)
- 5,200 psf compressive strength
- Chemical, rot, and root resistant
- 50' rolls available in 6', 6.5', and 8' width


APPLICATION

- Foundation Walls
- Structural Slabs

See page 102 for ordering information



See page 110 for ordering information

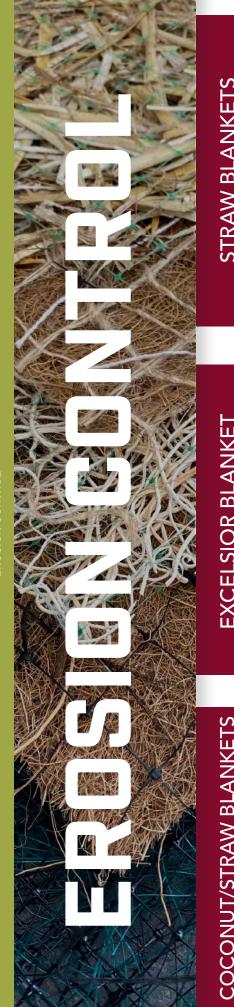



- Single or double sidedoptions
- Weed-Free Straw
- Erosion control up to one year
- Improves Seed Germination
- Serves as a mulching layer
- Natural or Photodegradable

APPLICATIONS

- Single Sided: 3:1 Slope
- Double Sided: 2:1 Slope
- Cover Septic Systems
- Highway Slopes
- Embankments
- Shoreline Stabilization

ROLL SIZES OPTIONS

- Single Sided: 4'and 8'
- Double Sided: 8'

See page 110 for ordering information

FEATURES

- 100% Aspen Wood
- Improves Seed Germination
- Natural or Photodegradable
- Erosion control up to 12 months

APPLICATIONS

- Erosion Control Slopes
- Cover Septic Systems
- Highway Slopes
- Embankments
- Shoreline Stabilization

ROLL SIZE

• 8'

See page 110 for ordering information

FEATURES

- 100% coconut, or straw and coconut mix options
- Erosion control up to 36 months
- Improves Seed Germination
- Serves as a mulching layer
- Natural or Synthetic Net

ROLL SIZE

APPLICATIONS

- Erosion Control Slopes
- Double Sided 30% Coconut/ 70% Straw: 2:1 Slope
- Double Sided 100% Coconut: 1:1 Slope
- Improves Seed Germination
- Cover Septic Systems
- Highway Slopes
- Embankments
- Shoreline Stabilization





- Improves Seed Germination
- Erosion control greater than 36 months
- Turf reinforcement for more severe slope applications

APPLICATIONS

- Erosion Control Slopes
- 1:1 Slope
- Highway Slopes
- Embankments
- Shoreline Stabilization

ROLL SIZE


• 8'

See page 110 for ordering information



TURF REINFORCEMENT MAT

It can also be used around structures to help prevent washouts caused by rain coming off the roof. This is a permanent installation through which grass will still grow.

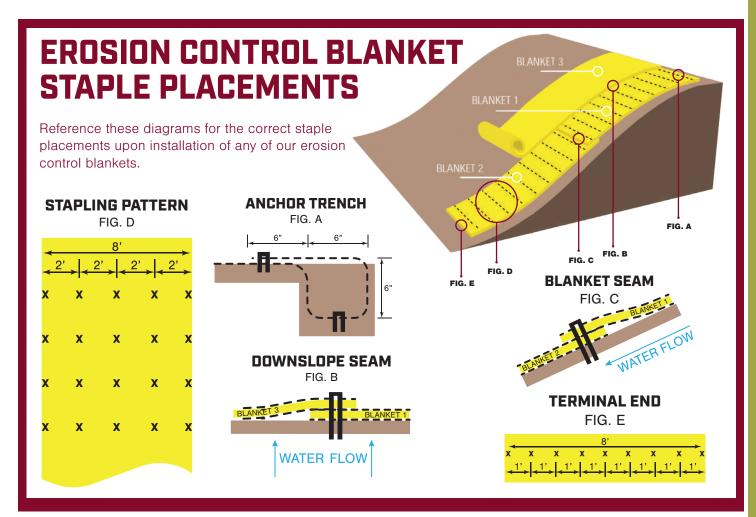




- Environmentally friendly erosion control for wetlands, waterways, and general areas under construction
- Filters 90% of sediment from runoff
- Easy Install, Reusable
- No equipment needed to install
- Resists and prevents wash out in sloped ditches or slopes

APPLICATIONS

- Erosion Control Slopes
- Cover Septic Systems
- Highway Slopes
- Embankments
- Shoreline Stabilization

OPTIONS: 8" Roll

See page 110 for ordering information



FEATURES

- Use these weed-free wattles over bare soil or in conjunction with erosion control blankets, on steep slopes, around drains for inlet protection or as perimeter control for job sites
- Helps stabilize slopes by slowing, spreading and filtering overland water flow
- Flexible and conforms to the surface
- Resists and prevents wash out in sloped ditches or slopes

APPLICATIONS

- Erosion Control Slopes
- Cover Septic Systems
- Highway Slopes
- Embankments
- Shoreline Stabilization

OPTIONS: 9" and 12" Roll

See page 110 for ordering information



- Designed to be filled on site
- A woven monofilament tube sock filled with rock or aggregate to minimize runoff on hard surfaces or landscape areas
- First & last line of defense for filtration in roadways

APPLICATIONS

- Hard Surfaces
- Protect Curb Inlets
- Provides a Barrier Against Sediment Washout



ROCK LOG



WHEN PURCHASING OUR FABRICS, GRIDS, AND BLANKETS, REMEMBER THAT THE ACCESSORIES ARE EQUALLY IMPORTANT

When laying down our industry-leading fabric, blankets, and grid, it's crucial to secure them in place with their essential counterparts, SRW Products Staples and Pins. These accessories are indispensable for a successful installation. Use our Staple Setter and Pin Pounder to put the steel down quickly and with ease.



FEATURES

- Great for environmentally sensitive erosion control applications
- Biodegradable blanket woven from spun jute yarns
- Typically provides 6 9 months of erosion control
- Up to 70 75% open area
- Large aperture size to minimize harm to wildlife

APPLICATIONS

- Recommended slope is 3:1
- Slope protection
- Re-vegetation

See page 110 for ordering information



STRAWMAX

FEATURES


- Comprised of chopped agricultural straw and natural guar gum tackifier
- Pre-chopped for easy hand spreading
- Safe for use around home, children and pets
- Biodegradable
- Prevent Soil Erosion
- Improve Seed Germination

APPLICATIONS

- Ideal for lawn repairs
- Cover Septic System
- Embankments

Coverage: up to 500 sq. ft. per bale

WOOD STAKES






- Silt Fence is a woven fabric that temporarily controls sediment on construction sites
- Silt Fence comes in bulk or pre-attached posts
- Stakes are pointed for easy install
- Protects water quality in nearby streams, rivers, and lakes from sediment in storm water runoff

APPLICATIONS

• Around Construction Sites

*DOT options available, contact your Territory Sales Representative for more information

See page 111 for ordering information





FEATURES

- Made from Hardwood
- Stakes are pointed for easy install

APPLICATIONS

- Silt Fence
- Straw Wattle
- Silt Sock

OPTIONS

▶ 40" and 48"

See page 111 for ordering information

FEATURES

- ► Meets DOT specifications
- ► Tough Guy® Technology

APPLICATIONS

- ► Construction Sites
- ► Ponds
- ► Shallow Lakes
- ► Small Streams/Marshes
- ► Current velocities of less than one foot per second

OPTIONS

► Type 1 DOT: 3', 5', 10'
► Type 2 DOT: 3', 5', 10'
► Type 3 DOT: 3', 5'

Accessories

See page 111 for ordering information

89



DANDY PRODUCTS

Soil erosion during construction can find its way in to the city's water system through storm sewers, grates and inlets. Because of the potential danger to our environment and sewer systems, the government has required contractors to use a professional-grade inlet filter and to erect their own sediment control solutions and measures when starting any new project. SRW Products partners with Dandy Products to ensure compliance on your small and large projects.

FEATURES

See page 111 for ordering information


- Unique Patented Designs
- Easy-to-see bright orange solutions
- Easy to install, maintain, inspect and reuse


APPLICATIONS

Around Curbs and Gutter Inlets
 Contact your local Sales Representative for custom sizes or overflow ports.

VELCRO CLOSURE VELCRO CLOSURE Used for easy movement and inspection of the unit

FIND OUT MORE AT SRWPRODUCTS.COM

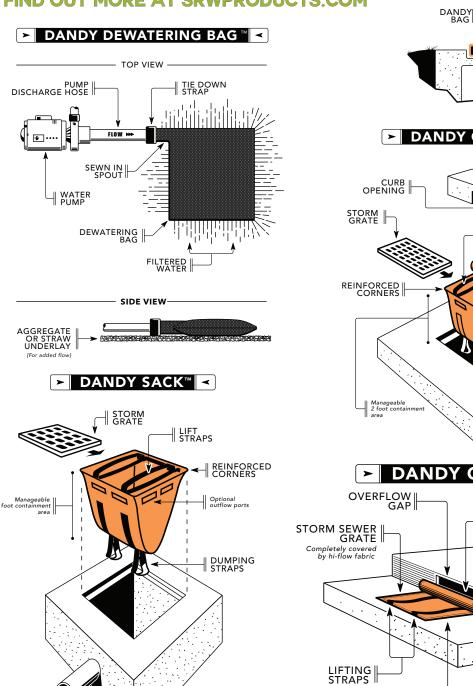

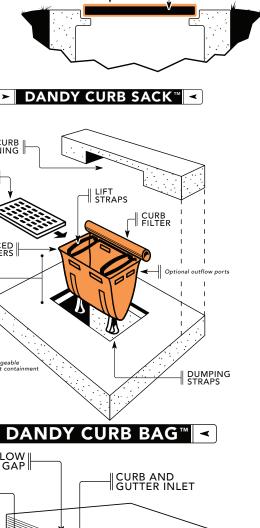

CURB
FILTER

Low profile with gutter
for safety and curb appeal



SRW GROW BAG™

FEATURES

- 100% Natural
- Biodegradable
- Retains Moisture
- Folded Edges

APPLICATIONS

- Plant Protection
- Wind Screen
- Tree Wraps
- Erosion Control
- Seed Germination
- Arts and Crafts

ROLL SIZE OPTIONS

• Burlap: 3', 4', 6'

See page 112 for ordering information





FEATURES

- Adds Growing Space
- Easy to move around
- Cost Effective
- Prevents Over-Watering
- Regulates Temperatures
- Easy to Use
- Collapsible for Storage
- Reusable
- Reinforced Stitching
- High Strength

APPLICATIONS

- *Planter:* Fruit, Vegetables, Plants, Flowers, Herbs, Cannabis, Commercial Crops
- Bulk Containers: Mulch, Salt, Dirt, Feed, Seed, Soil, Rock, and Gravel

COVERAGE

• 5 gal: 0.75 cu. ft. soil

• 10 gal: 1.5 cu. ft. soil

15 gal: 2.25 cu. ft. soil20 gal: 3 cu. ft. soil

TREE WATERING BAG

FEATURES

- Protect your tree investments and optimize growth with slow release
- Holds up to 15 gallons
- 5-8 hour water release
- Commercial Grade Material
- No tools required for installation
- Easy to Install
- Save Time and Money

APPLICATIONS

• Ideal for tree trunks up to 4" in diameter or chain multiple bags together for larger trunks

See page 112 for ordering information



TREE WATERING RINGS

FEATURES

- Protect your tree investments and optimize growth with slow release
- Holds up to 15 gallons
- 6+ hour drip time
- Two valves for even distribution
- Reduces transplant shock and drought stress

APPLICATIONS

• Ideal for tree trunks up to 6" in diameter





- Redirect water flow
- Easy to cut, Easy to use
- Tear Resistant
- Weed Control

APPLICATION

- Runoff Mitigation
- Moisture retention for concrete curing
- Project protection from rain

SIZE OPTIONS

- 6', 10', 20' widths
- 100' Length

See page 112 for ordering information

FEATURES

 SRW Products offers a range of stretchable, highly elastic plastic film that keeps items tightly bound.

OPTIONS

• 70 and 120 ga.





JETSWEEP

FEATURES

- Quickly attach to a variety of handled tools like Push Brooms, Squeegees, Deck Brushes, and more.
- Sturdy, all-metal design
- Works with any garden hose
- Quick-connect adapters for easy tool-swapping
- Shut-off valve for convenience and flow control

APPLICATIONS

- WetLok[™] Installation
- Patio Cleaning with SRW Products Cleaners
- Garage Floors
- Decks
- Pool Deck
- Driveway
- Siding
- Outdoor Jobs



See page 112 for ordering information







- Dimensions: 67" H x 16" W x 16" D
- Quality heavy-duty construction, to easily handle SRW Products adhesives
- Two Wire Shelves
- Bottom Storage Self
- Sign Channel to hold product labels (ordered separately)
- Powder coat finish: semi-gloss black
- Header Sign Set Conveniently packaged with the display

Contact your Territory Sales Representative today about the qualifications required to get a display.

See page 92 for ordering information

CLEANER/SEALER DISPLAY



FEATURES

- Dimensions: 72" H x 28" W x 24" D
- Quality heavy-duty construction, to easily handle SRW Products cleaners and sealers
- Sign Channel to hold product labels (ordered separately)
- Powder coat finish: semi-gloss black
- Header Sign Set Conveniently packaged with the display

Contact your Territory Sales Representative today about the qualifications required to get a display.

See page 92 for ordering information

FABRIC DISPLAY



FEATURES

- Dimensions: 72" H x 28 ¼" W x 27" D
- Quality heavy-duty construction, to easily handle SRW Products fabric and geogrid
- Four metal shelving arms to conveniently hold rolls
- Sign Channel to hold product labels (ordered separately)
- Powder coat finish: semi-gloss black
- Header Sign Set Conveniently packaged with the display

Contact your Territory Sales Representative today about the qualifications required to get a display.



We have tools available to you 24/7 on SRWProducts.com to aid in getting projects done right. Find tech data sheets, safety data sheets, application charts, expanded application instructions, how-to videos, & more.

Get ready to engage & excite your customers with our marketing collateral. We supply materials such as flyers, brochures, & application charts. Plus, we offer interactive sample-sized products, fabric, & geogrid cards that you can touch, test, & share, making the experience more personal. Contact your Territory Sales Representative or Customer Service to learn more.

Personalize your store's branding with our custom co-branded signage tailored to meet your specific needs. Whether you're looking for banners, wall signage, or floor graphics, we've got you covered. SRW Products delivers high-quality, personalized signage that aligns with your store's unique identity. Reach out to your Territory Sales Representative today to explore more.



OTHER WAYS TO DISPLAY OUR PRODUCTS





ADHESIVES

SUPERIOR STRENGTH PAGE 8 SOLVENT-BASED™ ADHESIVE						
PART # SIZE AMT PER CTN QTY						
A 10	10 OZ	12/CTN	64 CTNS/PLT			
A 28	28 OZ	12/CTN	44 CTNS/PLT			
AP 10* (VOC)	10 OZ	12/CTN	64 CTNS/PLT			
AP 28* (VOC)	28 OZ	12/CTN	44 CTNS/PLT			

*VOC C	ompliant
--------	----------

RAPID-SET POLYURETHANE™ PAGE 8 ADHESIVE							
PART #	SIZE	AMT PER CTN	QTY				
APU 10	10 OZ	12/CTN	64 CTNS/PLT				
APU 28	APU 28 28 OZ 12/CTN 44 CTNS/PLT						

SEAMS RIGHT	PAGE 10		
PART #	SIZE	AMT PER CTN	QTY
ATURF 28	28 OZ	12/CTN	40 CTNS/PLT

	PREMIUM C	PAGE 10		
1	PART #	MODEL #	SIZE	AMT PER CTN
	CG00002	250	10 OZ	6/CTN
1	CG00004	255	28 OZ	6/CTN
-				

Z	CG00004	255	28 OZ	6/CTN
19	STANDARD	PAGE 10		
2	PART #	MODEL #	SIZE	AMT PER CTN
¥	CG00005	101	10 OZ	12/CTN
AULKING	CG00006	105	28 OZ	6/CTN
נ	ECONOMY	PAGE 10		

ECONOMY	PAGE 10		
PART #	MODEL #	SIZE	AMT PER CTN
CG00001	012	10 OZ	24/CTN
CG00003	035	28 OZ	6/CTN

VERTICAL INSTANT LOCK™ ADHESIVE PAGE 9						
PART #	SIZE	AMT PER CTN	QTY			
AVIL 10	9.5 OZ	12/CTN	140 CTNS/PLT			
SF-8™ ADHES	VE		PAGE 9			
SF-8 [™] ADHESI PART #	VE SIZE	AMT PER CTN	PAGE 9 QTY			

ADHESIVE DIS	PAGE 12	
PART #	SIZE	QTY
ADISPLAY	67" H x 16" W x 16" D	40 LBS

OUN OUN	STANDARD I	PAGE 13	
6	PART #	QTY	
띪	SF8G	1/BOX	
m			
ENSI	PREMIUM DI	SPENSER GUN	PAGE 13
DISPEN	PREMIUM DI	SPENSER GUN	PAGE 13

SF-8™ CLEANER			PAGE 13
PART #	SIZE	AMT PER CTN	QTY
CSF8	16 OZ	12/CTN	120 CTNS/ PLT

CLEANERS

PW PAVER WASH	- 1™		PAGE 14		
PART #	SIZE	AMT PER CTN	N QTY		
SSPW CTN	1 GAL	4/CTN	36 CTNS/PLT		
SSPW 5GAL	5 GAL	1	36/PLT		
EF EFFLORESCE	ENCE REM	OVER™	PAGE 14		
PART #	SIZE	AMT PER CTN	N QTY		
SSE CTN	1 GAL	4/CTN	36 CTNS/PLT		
SSE 5GAL	5 GAL	1	36/PLT		
CDX CLEANER AND DEGREASER PAGE 16					
X-TREME™					
PART #	SIZE	Al	MT PER CTN		
SSCDX CTN 4	1 QT		4/CTN		
RE RUST ELIMIN	IATOR™		PAGE 16		
PART #	SIZE	Al	MT PER CTN		
SSRE CTN 4	1 QT		4/CTN		
OC ORGANIC ST	AIN CLEA	NER™	PAGE 16		
PART #	SIZE	٨١	AT DED CTN		
. ,	SIZE	Λ.	MT PER CTN		

DW DUAL WASH™ PAGE 15			
DW DUAL WAS	П		PAGE 15
PART #	SIZE	AMT PER CTN	QTY
SSDW CTN	1 GAL	4/CTN	36 CTNS/PLT
SSDW 5GAL	5 GAL	1	36/PLT
M ³ C MOLD, MC	DSS, AND	MILDEW	PAGE 14
CLEANER™			
PART #	SIZE	AMT PER CTN	QTY
SSMC CTN QT4	1 QT	4/CTN	_
SSMC CTN	1 GAL	4/CTN	36/PLT
GAL4	T G/\L	470111	00/1 E1
XY XYLENE SC	DLVENT™		PAGE 17
PART #	SIZE	AMT PER CTN	QTY
SSS XY CTN	1 GAL	4/CTN	36 CTNS/PLT
SSS XY 5	5 GAL	1	36/PLT
SS SEALER ST	RIPPER™		PAGE 17
PART #	SIZE	AMT PER CTN	QTY

SS SEALER S	PAGE 17		
PART #	SIZE	AMT PER CTN	QTY
SSS STRIPPER CTN	1 GAL	4/CTN	36 CTNS/PLT
SSS STRIPPER 5	5 GAL	1	36/PLT

CLEANERS

JETSWEEP	PAGE 1	5
PART #	QTY	
WJS JET SWEEP	1/BOX	

CLEANER/SE	PAGE 17	
PART #	SIZE	QTY
MSIDE	72" H x 28" W x 24" D	73 LBS

SEALERS

	PS PENETR	ATING™		PAGE 20
	PART #	SIZE	AMT PER CTN	QTY
	SSPSPLUS CTN	1 GAL	4/CTN	36 CTNS/PLT
	SSPSPLUS 5 GAL	5 GAL	1	36/PLT
SEAL	LG LOW GL	OSS™		PAGE 20
	PART #	SIZE	AMT PER CTN	QTY
甬	SSPS CTN	1 GAL	4/CTN	36 CTNS/PLT
PAVER	SSPS 5GAL	5 GAL	1	36/PLT
	HG HIGH G	LOSS™		PAGE 20
	PART #	SIZE	AMT PER CTN	QTY
	SSPSPRO CTN	1 GAL	4/CTN	36 CTNS/PLT
	SSPSPRO 5GAL	5 GAL	1	36/PLT
	DG DUAL G	UARD™		PAGE 22

	DG DUAL G	UARD™		PAGE 22
	PART #	SIZE	AMT PER CTN	QTY
EA	SSDG CTN	1 GAL	4/CTN	36 CTNS/PLT
A S	SSDG 5GAL	5 GAL	1	36/PLT
PREMIUM SEAL	SSDG VOC CTN*	1 GAL	4/CTN	36 CTNS/PLT
PRI	SSDG VOC 5GAL*	5 GAL	1	36/PLT
	*VOC Compliant			

	PRX PAVER RESTORE X-TREME™ PAGE 23					
	PART #	SIZE	AMT PER CTN	QTY		
	SSPC PRX CTN	1 GAL	4/CTN	36 CTNS/PLT		
	SSPC PRX 5GAL	5 GAL	1	36/PLT		
	SSPC PRX VOC CTN*	1 GAL	4/CTN	36 CTNS/PLT		
SEAL	SSPC PRX VOC 5GAL*	5 GAL	1	36/PLT		
≥	*VOC Compliant					

}.	*VOC Compliant			
₫	S-PS PENE	TRATING ™		PAGE 23
	PART #	SIZE	AMT PER CTN	QTY
SP	STONE S-PS CTN	1 GAL	4/CTN	36 CTNS/PLT
	STONE S-PS 5GAL	5 GAL	1	36/PLT
	STONE S-PS VOC CTN*	1 GAL	4/CTN	36 CTNS/PLT
	STONE S-PS VOC 5GAL*	5 GAL	1	36/PLT
	*VOC Compliant			

	PSX PENET	RATING X-	TREME™	PAGE 21
	PART #	SIZE	AMT PER CTN	QTY
	SSPC PSX CTN	1 GAL	4/CTN	36 CTNS/PLT
	SSPC PSX 5 GAL	5 GAL	1	36/PLT
	LGX LOW G	LOSS X-TI	REME™	PAGE 21
	PART #	SIZE	AMT PER CTN	QTY
	SSPC LGX CTN	1 GAL	4/CTN	36 CTNS/PLT
	SSPC LGX 5GAL	5 GAL	1	36/PLT
	SSPC LGX VOC CTN*	1 GAL	4/CTN	36 CTNS/PLT
	SSPC LGX VOC 5GAL*	5 GAL	1	36/PLT
AL	*VOC Compliant			
S	HGX HIGH	GLOSS X-T	REME™	PAGE 21
Σ	PART #	SIZE	AMT PER CTN	QTY
PREMIUM SEAI	SSPC HGX CTN	1 GAL	4/CTN	36 CTNS/PLT
ū	SSPC HGX 5GAL	5 GAL	1	36/PLT
	SSPC HGX VOC CTN*	1 GAL	4/CTN	36 CTNS/PLT

DG DUAL G	UARD™		PAGE 22
PART #	SIZE	AMT PER CTN	QTY
SSDG CTN	1 GAL	4/CTN	36 CTNS/PLT
SSDG 5GAL	5 GAL	1	36/PLT
SSDG VOC CTN*	1 GAL	4/CTN	36 CTNS/PLT
SSDG VOC 5GAL*	5 GAL	1	36/PLT
*VOC Compliant			

1

36/PLT

5 GAL

SSPC HGX

VOC 5GAL*

*VOC Compliant

۲	JS JOINT S	PAGE 23		
AL:	PART #	SIZE	AMT PER CTN	QTY
ᇤ	SSJS CTN	1 GAL	4/CTN	36 CTNS/PLT
SPI	SSJS 5GAL	5 GAL	1	36/PLT

SEALERS

"	SRW SLIT FO	AM ROLLER™	PAGE 24		
8	PART #	SIZE	QTY		
Ë	SSSFR CTN	13/16" ROLLER	12/CTN		
FOAM ROLLERS	SRW SLIT FO	AM ROLLER X-	TREME™ PAGE 24		
Σ	PART #	SIZE	QTY		
FO/	SSSFR XTR CTN	1/2" ROLLER	12/CTN		
SF	R SLIP-RESIST	тм	PAGE 24		
	PART #	SIZE	QTY		
	SSSR PG	3.2 OZ BAG	12/CTN		
CI	CLEANER/SEALER DISPLAY PAGE 25				

SIZE

72" H x 28" W x

24" D

QTY

73 LBS

PART #

MSIDE

	1 GALLON SF	PRAYER	PAGE 25
	PART #	SIZE	QTY
ERS	SSSP SPRAY- ER POLY 1	1 GAL	1/BOX
SPRAYERS	HEAVY-DUTY	PAGE 25	
끊	CONSTRUCT	ION SPRAYER	
Ŗ	PART #	SIZE	QTY

EDGING

ULTRALOK PA	PAGE 28			
PART #	SIZE	AMT PER CTN	QTY	
PRAIL ULTRA	7' 9"	24/BNDL	28 BNDLS/PLT	
For less than full pallet quantities contact your Territory Sales Representative				

or less trian full pallet quantities contact your Territory Sales Representative

CRETE-RAIL™		PAGE 28
PART #	SIZE	QTY
CRAIL 50	50 LB BAG	49 BAGS/PLT

BENDA BOARI		PAGE 29	
PART #	COLOR	SIZE	QTY
BRAIL FLEX BLK	BLACK	.3" x 3.3" x 16'	96 CTNS/PLT
BRAIL FLEX TEAK	TEAK	.3" x 3.3" x 16'	96 CTNS/PLT

UNIVERSAL P	PAGE 29		
PART #	SIZE	AMT PER CTN	QTY
PRAIL UNIV	7' 8"	12/BNDL	48 BNDLS/PLT

15' Universal Paver Rail™ available by special order - pallet QTY only

FLEX PAVER F	RAIL™		PAGE 29
PART #	SIZE	AMT PER CTN	QTY
PRAIL EX	7' 8"	12/BNDL	48 BNDLS/PLT

LOW PROFILE	PAGE 29		
PART #	SIZE	AMT PER CTN	QTY
PRAIL UNIVLP	7' 8"	12/BNDL	48 BNDLS/PLT

JOINTING SANDS

PAVERMATE Z	3™		PAGE 30
PART #	COLOR	SIZE	QTY
SSAN PAVZ3 TAN	TAN	50 LB BAG	49 BAGS/PLT
SSAN PAVZ3 GRA	GRANITE	50 LB BAG	49 BAGS/PLT
SSAN PAVZ3 BLK	BLACK	50 LB BAG	49 BAGS/PLT
SSAN PAVZ3 IVY	IVORY	50 LB BAG	49 BAGS/PLT
SSAN PAVZ3 BEIGE*	BEIGE	50 LB BAG	49 BAGS/PLT

*Region specific, ask Territory Sales Representative for more information

X-TREME™			PAGE 30
PART #	COLOR	SIZE	QTY
SSAN XTRTAN	TAN	50 LB BAG	49 BAGS/PLT
SSAN XTRGRA	GRANITE	50 LB BAG	49 BAGS/PLT

WETLOK™			PAGE 31
PART #	COLOR	SIZE	QTY
WETLOK TAN 36	TAN	36 LB TUB	65 TUBS/PLT
WETLOK GRA 36	GRANITE	36 LB TUB	65 TUBS/PLT
WETLOK BLK 36	BLACK	36 LB TUB	65 TUBS/PLT
WETLOK PLTM 36	PLATI- NUM	36 LB TUB	65 TUBS/PLT
WETLOK BEACH 36	BEACH	36 LB TUB	65 TUBS/PLT

SIMPLYTOUGH	PAGE 31		
PART #	COLOR	SIZE	QTY
SSAN ST TAN	TAN	50 LB BAG	49 BAGS/PLT
SSAN ST GRA	GRANITE	50 LB BAG	49 BAGS/PLT

STABILIZERS

SRW PATH STABILIZER™ PAGE 34				
PART #	SIZE	AMT PER CTN	QTY	
TAC PATH 5GAL	5 GAL	1	36/PLT	

MULCH STABI	LIZER™		PAGE 35
PART #	SIZE	AMT PER CTN	QTY
TAC MULCH CTN	1 GAL	4/CTN	36 CTNS/PLT
TAC MULCH 5GAL	5 GAL	1	36/PLT

JS JOINT STA	BILIZER™*		PAGE 34
PART #	SIZE	AMT PER CTN	QTY
SSJS CTN	1 GAL	4/CTN	36 CTNS/PLT
SSJS 5GAL	5 GAL	1	36/PLT

*While Supplies Last

SRW ROCK BI	NDER™		PAGE 35
PART #	SIZE	AMT PER CTN	QTY
TAC RB CTN	1 GAL	4/CTN	36 CTNS/PLT
TAC RB 5GAL	5 GAL	1	36/PLT

ROMEX®

ROMEX ECO F	INE		PAGE 36
PART #	COLOR	SIZE	QTY
ROMEX ECO FINE - BEIGE	BEIGE	27.5 LB TUB	80/PLT
ROMEX ECO FINE - GREY	GREY	27.5 LB TUB	80/PLT
ROMEX ECO FINE - ANTHRACITE	BLACK	27.5 LB TUB	80/PLT

ROMEX TRAS	S BED		PAGE 37
PART #	DISC.	SIZE	QTY
ROMEX TRASS BED	PAVER BEDDING	55 LB	42/PLT

ROMEX ADHESION E	LUTRIANT	PAGE 37
PART #	DISC.	QTY
ROMEX ADHESION ELUTRIANT	Thin set used in combination with Trass Bed	42/PLT

ROMEX PROFI-DEKO		PAGE 38
PART #	SIZE	QTY
ROMEX PROFI-DECKO	6.6 LBS	200/PLT

FUGENSAND, D7000, ISATEC ANCHORS, GROUT KIT, D1, FLEX JOINT, AND D4000 HR:

Special Order – Full Pallet Quantities Required Please contact your local SRW Territory Sales Representative for pricing and lead times.

DIAMOND BLADES

	GENERAL	PURPOS	SE DIAMOND	BLADES (BLUE)				PAGE 42
	PART #	SIZE	THICKNESS/ SEG HEIGHT	ARBOR	STYLE	SLOT STYLE	SEGMENT STYLE GUIDE NUMBER	COOLING HOLES	GRADE
	BTP 4	4"	.250"/10 MM	7/8"-5/8"	SEG	KEY-HOLE	1	NO	STANDARD
	BU 04.5	4.5"	.080"/8 MM	7/8"-5/8"	CONT. TURBO RIM	NONE	8	YES	STANDARD
	BU 045 SEG	4.5"	.060"/8 MM	7/8"-5/8"	SEG	KEY-HOLE	1	NO	STANDARD
	BU 07	7"	.095"/10 MM	UNIVERSAL	CONT. TURBO RIM	NONE	8	YES	STANDARD
	BU 070 SEG	7"	.080"/8 MM	UNIVERSAL	SEG	KEY-HOLE	1	NO	STANDARD
OSE	BGPC 09	9"	.090"/10 MM	5/8"-7/8"	TURBO SEG	KEY-HOLE	6	NO	PREMIUM
URP	BU 09	9"	.090"/10 MM	5/8"-7/8"	SEG	KEY-HOLE	1	NO	STANDARD
GENERAL PURPOSE	BU 10	10"	.095"/10 MM	UNIVERSAL	SEG	KEY-HOLE	1	NO	STANDARD
ENE	BGPC 10	10"	.095"/10 MM	7/8"-5/8"	SEG	KEY-HOLE	1	NO	PREMIUM
0	BU 12	12"	.125"/10 MM	1"/20 MM	SEG	KEY-HOLE	1	NO	STANDARD
	BGPC 12	12"	.125"/12 MM	1"/20 MM	TURBO SEG	KEY-HOLE	1	NO	PREMIUM
	BU 14	14"	.125"/10 MM	1"/20 MM	SEG	KEY-HOLE	1	NO	STANDARD
	BGPC 14	14"	.125"/12 MM	1"/20 MM	SEG	KEY-HOLE	1	NO	PREMIUM
	BGPZ 14	14"	.125"/15 MM	1"/20 MM	ALT TURBO SEG	WIDE KEY- HOLE	3	YES	PREMIUM
	BGPX 14	14"	.125"/15 MM	1"/20 MM	TURBO/ CROWN SEG	NARROW U-SLOT	7	YES	PREMIUM
	BGPQ 165	16.5"	.125"/12 MM	—	ALT TURBO SEG	WIDE U-SLOT	5	YES	PREMIUM
ш	ALL PURP	OSE DIA	AMOND BLAD	ES (RED)					PAGE 42
POSE	PART #	SIZE	THICKNESS/ SEG HEIGHT	ARBOR	STYLE	SLOT STYLE	SEGMENT STYLE GUIDE NUMBER	COOLING HOLES	GRADE
PUR	BVAP 14	14"	.125"/13 MM	1"/20 MM	TURBO ALT SEG	ANGLED U-SLOT	5	YES	STANDARD
ALL	BPAP 14	14"	.125"/13 MM	1"/20 MM	TURBO ALT SEG	ANGLED KEY- HOLE	4	YES	PREMIUM
AE AL	ABRASIVE	MATER	IAL DIAMON	D BLADES	(GREEN)				PAGE 43
ABRASIVE MATERIAL	PART #	SIZE	THICKNESS/ SEG HEIGHT	ARBOR	STYLE	SLOT STYLE	SEGMENT STYLE GUIDE NUMBER	COOLING HOLES	GRADE
ABF MA	BAMA 14	14"	.125"/10 MM	1"/20 MM	SEG/DROP SEG	WIDE U-SLOT	2	NO	PREMIUM
	HARD MAT	ERIAL D	DIAMOND BL	ADES (YEL	LOW)				PAGE 43
ار ا	PART #	SIZE	THICKNESS/ SEG HEIGHT	ARBOR	STYLE	SLOT STYLE	SEGMENT STYLE GUIDE NUMBER	COOLING HOLES	GRADE
ERIA	BPPB 4.5	4.5"	.050"/10 MM	7/8"-5/8"	CONT TURBO RIM	NONE	8	YES	PREMIUM
MATERIAL	BPPC 12	12"	.125"/12 MM	1"/20 MM	SEG TURBO	KEY-HOLE	6	YES	STANDARD
HARD	BPPB 14	14"	.087"/10 MM	1"	CONT TURBO RIM	NONE	8	YES	PREMIUM
Ŧ	BPPC 14	14"	.125"/12 MM	1"/20 MM	SEG TURBO	KEY-HOLE	6	NO	STANDARD
	BPPB blades are	e the only ha	ard material blades o	designed to cut p	orcelain				



SEGMENT STYLE GUIDE



DIAMOND BLADES ACCESSORIES

EE	SINGLE TU	IRBO CI	JP WHEEL		PAGE 44
ij	PART #	SIZE	ARBOR	STYLE	GRADE
cup w	BCW 4.5 ST	4.5"	5/8"-11 THREADED	SINGLE TURBO	STANDARD

DOUBLE T	URBO (CUP WHEEL		PAGE 44
PART #	SIZE	ARBOR	STYLE	GRADE
BCW 4.5 DT	4.5"	5/8"-11 THREADED	DOUBLE TURBO	STANDARD

	2" CORE BI	T		PAGE 46
	PART #	SIZE	STYLE	QTY
CORE BITS	BCBP 2	2" x 1.25"	WET/DRY	1/BOX
Щ				
<u> </u>	2" CODE DI			
	3" CORE BI			PAGE 47
8	PART #	SIZE	STYLE	PAGE 47 QTY

2.5" CORE	BIT		PAGE 46
PART #	SIZE	STYLE	QTY
BCBP 2.5	2.5" x 1.25"	WET/DRY	1/BOX
3 5" CORE	RIT		PAGE 47
3.5" CORE		6=\#.=	PAGE 47
3.5" CORE PART #	BIT SIZE	STYLE	PAGE 47 QTY

TURF ACCESSORIES


SEAMS RIGHT™ TURF TAPE PAGE 48				
PART #	SIZE	AMT PER CTN	QTY	
FST 06100 CTN	6"x100'	8/CTN	36/PLT	
FST 12050 CTN	12"x50'	6/CTN	36/PLT	
FST 12100 CTN	12"x100'	4/CTN	36/PLT	

SEAMS RIGHT™	PAGE 49		
PART #	SIZE	AMT PER CTN	QTY
ATURF 28	28 OZ	12/CTN	40/PLT

TURF NAILS			PAGE 48
PART #	SIZE	AMT PER CTN	QTY
FCMST 05-50#	5" SMOOTH	50LBS/CTN	48/PLT
FCMST 06-50#	6" SPIRAL	50LBS/CTN	48/PLT
SS GALV	GALVANIZED	JOEDS/CTN	40/1 L1
FCMST 05-100	5" SMOOTH	100/BOX	48/PLT
1 CIVIST 03-100	3 31000111	6 BOX/CTN	40/1 L1
FCMST 06-100	6" SPIRAL	100/BOX	48/PLT
SS GALV	GALVANIZED	6 BOX/CTN	40/PLI

^{*}Counts may vary by weight

STEEL

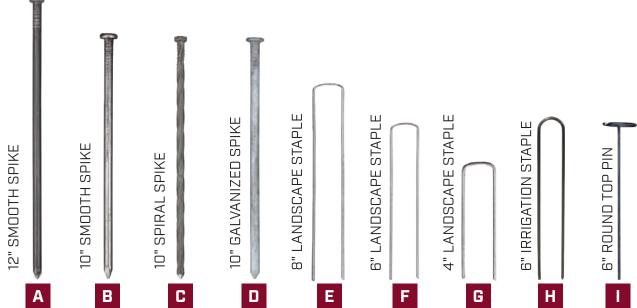

SF	PIKES			PAGE 50
ΒL	ILK CARTON			
	PART #	SIZE	AMT PER CTN	QTY
Α	FCMST 12- 50#	12" SMOOTH	50 LBS/CTN	48 CTNS/PLT
В	FCMST 10- 50#	10" SMOOTH	50 LBS/CTN	48 CTNS/PLT
С	FCMST 10-50#SS	10" SPIRAL	50 LBS/CTN	48 CTNS/PLT
D	FCMST 10-50# GALV	10" GALVANIZED	50 LBS/CTN	48 CTNS/PLT

*Counts vary by weight. Letters reference staple style on page 49

R	PAGE 0			
	PART #	SIZE	AMT PER CTN	QTY
ı	FCMST 6-RT1000	6"	1000/CTN*	75 CTNS/PLT

*Counts vary by weight. Letters reference staple style on page 49

, , ,			•
TURF NAILS			PAGE 51
PART #	SIZE	AMT PER CTN	QTY
FCMST 05-50#	5" SMOOTH	50LBS/CTN	48/PLT
FCMST 06-50#	6" SPIRAL	50LBS/CTN	48/PLT
SS GALV	GALVANIZED	JOEDS/CTN	40/1 L1
FCMST 05-100	5" SMOOTH	100/BOX	48/PLT
1 010101 00 100	0 01/100111	6 BOX/CTN	10/1 []
FCMST 06-100	6" SPIRAL	100/BOX	48/PLT
SS GALV	GALVANIZED	6 BOX/CTN	40/FLI

BENDABOARD STAKES PAGE 5					
PART #	SIZE	AMT PER BAG	QTY		
BRAIL STAKE	6"	5/BAG*	15 BAG/CTN		
12 TEAK CTN	0	37 B/ (G	10 B/(0/011)		
BRAIL STAKE	6"	5/BAG*	15 BAG/CTN		
12 BLK CTN	U	3/ BAG	13 DAG/CIN		

		F	قا		н	
	LA	NDSCAPE	E ST/	APLES	5	PAGE 50
	ВО	XED • 11 G	AUGE			'
		PART #		SIZE	AMT PER CTN	QTY
	F	FCMST D	100	6"	100/BOX*	12 BOX/CTN
	*Co	unts vary by we	eight. L	etters re	ference staple s	style on page 49
	LA	NDSCAPE	E STA	APLES	3	PAGE 50
	BA	GGED •11	GAUG	ŝΕ		
		PART #		SIZE	AMT PER CTN	QTY
	F	FCMST 62	0240	6"	20/BAG*	12 BAGS/CTN
	F	FCMST 65	0500	6"	50/BAG*	10 BAGS/CTN
ES	*C0	unts vary by we	aiaht I	etters re	ference stanle s	tyle on page 49
	00	anto vary by we	Jigini. L	ottoro ro	rererree staple e	is, is all parget to
APL E		NDSCAPE	Ŭ			PAGE 50
APL	LA		ST/	APLES	5	, , ,
APL	LA	NDSCAPE	ST/	APLES 1 GAU	5	PAGE 50
APL	LA	NDSCAPE	S ST A	APLES 1 GAU	GE	PAGE 50
APL	LA BU	NDSCAPE LK CARTON PART #	S • 1	APLES 1 GAU SIZE	GE AMT PER CTN	PAGE 50 QTY 50 CTNS/PLT
APL	LA BU	NDSCAPE LK CARTON PART # FCMST 8	500 1000	APLES 1 GAU SIZE 8"	GE AMT PER CTN 500/CTN*	PAGE 50 QTY 50 CTNS/PLT
APL	E F G	NDSCAPE LK CARTON PART # FCMST 81 FCMST 61	500 000	APLES 1 GAU SIZE 8" 6" 4"	GE AMT PER CTN 500/CTN* 1000/CTN*	PAGE 50 QTY 50 CTNS/PLT 60 CTNS/PLT
APL	E F G	NDSCAPE LK CARTON PART # FCMST 81 FCMST 61	500 000 000 000	APLES 1 GAU SIZE 8" 6" 4" etters re	GE AMT PER CTN 500/CTN* 1000/CTN* 1000/CTN*	PAGE 50 QTY 50 CTNS/PLT 60 CTNS/PLT 60 CTNS/PLT
APL	E F G	NDSCAPE LK CARTON PART # FCMST 8: FCMST 61 FCMST 41	500 000 000 000	APLES 1 GAU SIZE 8" 6" 4" etters re	GE AMT PER CTN 500/CTN* 1000/CTN* 1000/CTN*	PAGE 50 QTY 50 CTNS/PLT 60 CTNS/PLT 60 CTNS/PLT ttyle on page 49 PAGE 50
APL	E F G	NDSCAPE LK CARTON PART # FCMST 81 FCMST 61 FCMST 41 unts vary by we	500 000 000 eight. L	APLES 1 GAU SIZE 8" 6" 4" etters re	GE AMT PER CTN 500/CTN* 1000/CTN* 1000/CTN* ference staple s	PAGE 50 QTY 50 CTNS/PLT 60 CTNS/PLT 60 CTNS/PLT ttyle on page 49 PAGE 50

STEEL

STRINGALON	G [™] STAKES	PAGE 53
PART #	DESC.	QTY
FCSTR STAKE 10 PK	3/4"x24" FORMING STAKE	10 STAKES
STRINGALON	G™ COLLARS	PAGE 53
PART #	DESC.	QTY
FCSTR COLLAR 10 PK	10 PACK	10 COLLARS
FCSTR COL- LAR REFILL	REFILL	50 COLLARS
	PART # FCSTR STAKE 10 PK STRINGALON PART # FCSTR COLLAR 10 PK FCSTR COL-	FCSTR STAKE 10 PK STRINGALONG™ COLLARS PART # DESC. FCSTR COLLAR 10 PK FCSTR COL- REFEIL

STAPLE SETTER	R	PAGE 52
PART #	SIZE	QTY
FCMST STAPLE SETTER	42"	1/BOX

	STRINGALON	G™ DISPLAY		PAGE 53
MT	PART #	DESC.		QTY
LONG	FCSTR COLLAR DISP	DISPLAY	50 COLLARS	
GA	STRINGALON	GS™ COMBO I	PACK	PAGE 53
N N	PART #	DESC.		QTY
ST	FCSTR COMBO	COMBO PACK COLLARS AND STAKES		OLLARS STAKES

PIN POUNDER		PAGE 51
PART #	SIZE	QTY
FCMST 6-RT	42"	1/BOX
POUNDER	42"	1/80X

FABRIC

GENERAL LANDSCAPE • SPUNDOND

SB2				PAGE 54		
20 YEAR • 300' F	20 YEAR • 300' ROLL COLOR CODING GREEN					
PART #	SIZE	SQ YDS/ ROLL	QTY	PLT QTY		
FSB2 03025*	3'x25'	8.33	62/CTN	6 CTN		
FSB2 03050	3'x50'	16.67	34/CTN	6 CTN		
FSB2 03100	3'x100'	33.33	18/CTN	6 CTN		
FSB2 03300	3'x300'	100.00	42/PLT			
FSB2 04025*	4'x25'	11.11	62/CTN	6 CTN		
FSB2 04050	4'x50'	22.22	34/CTN	6 CTN		
FSB2 04100	4'x100'	44.44	18/CTN	6 CTN		
FSB2 04300	4'x300'	133.33	42/PLT			
FSB2 06100	6'x100'	66.67	30/PLT			
FSB2 06300	6'x300'	200.00	30/PLT			
FSB2 12300	12'x300'	400.00	4/BNDL			

*Made to order

SB3			F	PAGE 54			
30 YEAR • 300' F	30 YEAR • 300' ROLL COLOR CODING YELLOW						
PART #	SIZE	SQ YDS/ ROLL	QTY	PLT QTY			
FSB3 03025*	3'x25'	8.33	45/CTN	6 CTN			
FSB3 03050	3'x50'	16.67	24/CTN	6 CTN			
FSB3 03100	3'x100'	33.33	12/CTN	6 CTN			
FSB3 03300	3'x300'	100.00	30/PLT				
FSB3 04025*	4'x25'	11.11	45/CTN	6 CTN			
FSB3 04050	4'x50'	22.22	24/CTN	6 CTN			
FSB3 04100	4'x100'	44.44	12/CTN	6 CTN			
FSB3 04300	4'x300'	133.33	30/PLT				
FSB3 06100	6'x100'	66.67	32/PLT				
FSB3 06300	6'x300'	200.00	30/PLT				
FSB3 08300	8'x300'	266.67	4/BNDL				
FSB3 12300	12'x300'	400.00	4/BNDL				

SILVER*				PAGE 54	
20 YEAR • 300' ROLL COLOR CODING BLACK					
PART #	SIZE	SQ YDS/ROLL	QTY	PLT QTY	
FSSBS 03050	3'x50'	16.67	34/CTN	6 CTN	
FSSBS 03100	3'x100'	33.33	18/CTN	6 CTN	
FSSBS 03300	3'x300'	100.00	42/PLT		
FSSBS 04050	4'x50'	22.22	34/CTN	6 CTN	
FSSBS 04100	4'x100'	44.44	18/CTN	6 CTN	
FSSBS 04300	4'x300'	133.33	42/PLT		
FSSBS 06100	6'x100'	66.67	30/PLT		
FSSBS 06300	6'x300'	200.00	30/PLT		
FSSBS 09300	9'x300'	300	4/BNDL		
FSSBS 12300	12'x300'	400	4/BNDL		
*Pogion specific ask 7	Forritory Salo	c Ponrocontativo f	or more inform	nation	

*Region specific, ask Territory Sales Representative for more information

SILVER ELITE				PAGE 54
30 YEAR				
PART #	SIZE	SQ YDS/ROLL	QTY	PLT QTY
FSSBE 03050	3'x50'	16.67	22/CTN	6 CTN
FSSBE 03100	3'x100'	33.33	10/CTN	6 CTN
FSSBE 03300	3'x300'	100.00	30/PLT	
FSSBE 04050	4'x50'	22.22	22/CTN	6 CTN
FSSBE 04100	4'x100'	44.44	10/CTN	6 CTN
FSSBE 04300	4'x300'	133.33	30/PLT	
FSSBE 06100	6'x100'	66.67	32/PLT	
FSSBE 06300	6'x300'	200.00	30/PLT	
FSSBE 09300	9'x300'	300.00	4/BNDL	
FSSBE 12300	12'x300'	400.00	4/BNDL	
FSSBE 15300	15'x300'	500.00	4/BNDL	

SILVER PREM		PAGE 54		
PART #	SIZE	SQ YDS/ ROLL	QTY	PLT QTY
FSSBP 03300	3'x300'	100.00	30/PLT	
FSSBP 04300	4'x300'	133.33	30/PLT	
FSSBP 06300	6'x300'	200.00	30/PLT	
FSSBP 12300	12'x300'	400.00	4/BNDL	
FSSBP 15300	15'x300'	500.00	4/BNDL	

*Region specific, ask Territory Sales Representative for more information 103

FABRIC

WEED CONTROL * POLYSPUN

PS1.5 15 YEAR				PAGE 55
PART #	SIZE	SQ YDS/ ROLL	QTY	PLT QTY
FPS1.5 03050	3'x50'	16.67	26/CTN	6 CTN
FPS1.5 03100	3'x100'	33.33	14/CTN	6 CTN
FPS1.5 03300	3'x300'	100.00	42/PLT	

PS2				PAGE 55
20 YEAR • 300'	ROLL COLO	R CODIN	G WHITE	
PART #	SIZE	SQ YDS/ ROLL	QTY	PLT QTY
FPS2 03050	3'x50'	16.67	23/CTN	6 CTN
FPS2 03100	3'x100'	33.33	12/CTN	6 CTN
FPS2 03300	3'x300'	100.00	30/PLT	
FPS2 04050	4'x50'	22.22	23/CTN	6 CTN
FPS2 04100	4'x100'	44.44	12/CTN	6 CTN
FPS2 04300	4'x300'	133.33	30/PLT	
FPS2 06100	6'x100'	66.67	32/PLT	
FPS2 06300	6'x300'	200.00	20/PLT	
FPS2 08300	8'x300'	266.67	4/BNDL	

PS3 30 YEAR • 300'	BOLL CO	I OR CODII	NG TAN	PAGE 55
PART #	SIZE	SQ YDS/ ROLL	QTY	PLT QTY
FPS3 03050	3'x50'	16.67	18/CTN	6 CTN
FPS3 03100	3'x100'	33.33	9/CTN	6 CTN
FPS3 03300	3'x300'	100.00	30/PLT	
FPS3 04050	4'x50'	22.22	18/CTN	6 CTN
FPS3 04100	4'x100'	44.44	9/CTN	6 CTN
FPS3 04300	4'x300'	133.33	30/PLT	
FPS3 06100	6'x100'	66.67	35/PLT	
FPS3 06300	6'x300'	200.00	20/PLT	
FPS3 08300	8'x300'	266.67	4/BNDL	
FPS3 12300	12'x300'	400.00	4/BNDL	

PREMIUM LANDSCAPE • WOVEN/NON-WOVEN

PRO PLUS IV				
250' ROLL COLOR CODING ORANGE				
PART #	SIZE	SQ YDS/ ROLL	QTY	PLT QTY
FPP1V 03025*	3'x25'	8.33	34/CTN	6 CTN
FPP1V 03050	3'x50'	16.67	15/CTN	6 CTN
FPP1V 03100	3'x100'	33.33	8/CTN	6 CTN
FPP1V 03250	3'x250'	83.33	20/PLT	
FPP1V 04050	4'x50'	22.22	15/CTN	6 CTN
FPP1V 04100	4'x100'	44.44	8/CTN	6 CTN
FPP1V 04250	4'x250'	111.11	20/PLT	
FPP1V 06100	6'x100'	66.67	35/PLT	
FPP1V 06250	6'x250'	166.66	20/PLT	
FPP1V 12250	12'x250'	333.33	4/BNDL	

PRO PLUS V 250' ROLL COLOR C	PAGE 56		
PART #	SIZE	SQ YDS/ ROLL	QTY
FPPV 03250	3'x250'	83.33	20/PLT
FPPV 04250	4'x250'	111.11	20/PLT
FPPV 05250	5'x250'	138.89	20/PLT
FPPV 06250	6'x250'	166.66	20/PLT
FPPV 08250F*	8'x250'	222.22	9/PLT
FPPV 08250	8'x250'	222.22	4/BNDL
FPPV 12250	12'x250'	333.33	4/BNDL
FPPV 12250F*	12'x250'	333.33	9/PLT

^{*}Folded Fabric Rolls

GC PRO™

GROUND COVER • WOVEN

GC3™				PAGE 57
PART #	SIZE	SQ YDS/ ROLL	QTY	PLY QTY
FGC3 03050	3'x50'	16.67	30/CTN	6 CTN
FGC3 03100	3'x100'	33.33	15/CTN	6 CTN
FGC3 03300	3'x300'	100.00	42/PLT	
FGC3 04050	4'x50'	22.22	15/CTN	6 CTN
FGC3 04100	4'x100'	44.44	8/CTN	6 CTN
FGC3 04300	4'x300'	133.33	42/PLT	
FGC3 06100	6'x100'	66.67	30/PLT	
FGC3 06300	6'x300'	200.00	30/PLT	
FGC3 10300	10'x300'	333.33	4/BNDL	
FGC3 12300	12'x300'	400.00	4/BNDL	
FGC3 12300F*	12'x300'	400.00	4/BNDL	
FGC3 15300	15'x300'	500.00	4/BNDL	

300' ROLL COLOR CODING PURPLE						
PART #	SIZE	SQ YDS/ ROLL	QTY			
FGCPRO 03300	3'x300'	100.00	30/PLT			
FGCPRO 04300	4'x300'	133.33	30/PLT			
FGCPRO 06300	6'x300'	200.00	30/PLT			
FGCPRO 06500*	6'x500'	333.33	20/PLT			
FGCPRO 10300	10'x300'	333.33	3/BNDL			
FGCPRO 12300	12'x300'	400.00	3/BNDL			
FGCPRO 155300	15.5'x300'	516.67	3/BNDL			

PAGE 57

^{*}Made to order

^{*}Made to order

FABRIC

NON-WOVEN • NEED-PUNCHED

LS3™ PAGE 58 GENERAL LANDSCAPE AND FILTRATION FABRIC					
PART #	SIZE	SQ YDS/ ROLL	QTY	PLT QTY	
FLS3 03050	3'x50'	16.67	15/CTN	6 CTN	
FLS3 03100	3'x100'	33.33	42/PLT		
FLS3 03300	3'x300'	100.00	16/PLT		
FLS3 04050	4'x50'	22.22	15/CTN	6 CTN	
FLS3 04100	4'x100'	44.44	42/PLT		
FLS3 04300	4'x300'	133.33	16/PLT		
FLS3 06100	6'x100'	66.67	30/PLT		
FLS3 06300	6'x300'	200.00	12/PLT		
FLS3 09300	9'x300'	300.00	4/BNDL		
FLS3 12300	12'x300'	400.00	4/BNDL		

NW4 DRAINAGE AND FIL	PAGE 58		
PART #	SIZE	SQ YDS/ROLL	QTY
FNW4 03100	3'x100'	33.33	42/ PLT
FNW4 03300	3'x300'	100.00	16/PLT
FNW4 04100	4'x100'	44.44	42/ PLT
FNW4 04300	4'x300'	133.33	16/PLT
FNW4 06100	6'x100'	66.67	24/PLT
FNW4 06300	6'x300'	200.00	12/PLT
FCNW4 125360	12.5'x360'	500.00	3/BNDL
FCNW4 15360	15'x360'	600.00	3/BNDL

NW4.5 DRAINAGE AND	PAGE 58			
PART #	SIZE	SQ YDS/ ROLL	QTY	PLT QTY
FNW4.5 03100	3'x100'	33.33	42/PLT	
FNW4.5 03300	3'x300'	100.00	16/PLT	
FNW4.5 04050	4'x50'	22.22	9/CTN	6 CTN
FNW4.5 04100	4'x100'	44.44	42/ PLT	
FNW4.5 04300	4'x300'	133.33	16/PLT	
FNW4.5 06100	6'x100'	66.67	24/ PLT	
FNW4.5 06300	6'x300'	200.00	12/PLT	
FCNW4.5 125360	12.5'x360	500.00	3/BNDL	
FCNW4.5 15360	15'x360'	600.00	3/BNDL	

NW6 DRAINAGE AND FIL	PAGE 58		
PART #	SIZE	SQ YDS/ROLL	QTY
FNW6 06300	6'x300'	200.00	9/PLT
FCNW6 10100*	10'x100'	111.11	6/BNDL
FCNW6 10300**	10'x300'	333.33	3/BNDL
FCNW6 125360	12'x360'	500.00	3/BNDL
FCNW6 15300	15'x300'	500.00	3/BNDL

^{*}While supplies lasts

NW7	PAGE 63			
HEAVY DUTY EROSION CONTROL NON-WOVEN				
PART #	SIZE	SQ YDS/ ROLL	QTY	
FCNW7 15300	15'x300'	500.00	3/BNDL	

		PAGE 58		
HEAVY DUTY EROSION CONTROL NON-WOVEN				
SIZE	SQ YDS/ROLL	QTY		
6'x100'	66.67	20/PLT		
6'x300'	200.00	9/PLT		
12'x360'	500.00	3/BNDL		
15'x300'	500.00	3/BNDL		
	SIZE 6'x100' 6'x300' 12'x360'	SIZE SQ YDS/ROLL 6'x100' 66.67 6'x300' 200.00 12'x360' 500.00		

NW10 • SPECIA	NW10 • SPECIAL ORDER		
DRAINAGE AND FIL			
PART #	SIZE	SQ YDS/ROLL	BNDL QTY
FCNW10 125360	12'x360'	500.00	3/BNDL
FCNW10 15300	15'x300'	500.00	3/BNDL

Special Order: Large roll sizes are not in stock and will direct ship.

NW12 • SPECIAL ORDER HEAVY DUTY NON-WOVEN			PAGE 63
PART #	SIZE	SQ YDS/ROLL	QTY
FCNW12 125360	12'x360'	500.00	1
FCNW12 15300	15'x300'	500.00	1

Special Order: Large roll sizes are not in stock and will direct ship

NW16 • SPECIA HEAVY DUTY NON-	PAGE 63		
PART #	SIZE	SQ YDS/ROLL	QTY
FCNW16 125360	12'x360'	500.00	1
FCNW16 15150	15'x150'	250.00	1
FCNW16 15300	15'x300'	500.00	1

^{*}Special Order: Large roll sizes are not in stock and will direct ship.

Minimum quantities may apply to any special orders

^{**}Direct Ship

FABRIC

STABILIZATION/SPEPARATION • WOVEN

SS5			PAGE 60		
200 LB • WOVEN SLIT FILM					
PART #	SIZE	SQ YDS/ROLL	QTY		
FSS5 04050	4'x50'	22.22	20/CTN		
FSS5 04100	4'x100'	44.44	11/CTN		
FSS5 06050	6'x50'	33.33	1		
FSS5 06100	6'x100'	66.67	80/PLT		
FSS5 06300	6'x300'	200.00	16/PLT		
FSS5 125027*	12.5'x27'	37.50	8/CTN		
FSS5 125054*	12.5'x54'	75.00	30/PLT		
FSS5 125108*	12.5'x108'	150.00	20/PLT		
FCSS5 125432	12.5'x432'	600.00	3/BNDL		
FCSS5 15360	15'x360'	600.00	3/BNDL		
FSS5 1750515*	17.5'x51.5'	100.00	20/PLT		
FSS5 175103*	17.5'x103'	200.00	16/PLT		
FCSS5 175309	17.5'x309'	600.00	3/BNDL		
*Folded Fabric Rolls					

SS6	PAGE 63		
315 LB. • WOVE			
PART #	SIZE	SQ YDS/ROLL	QTY
FCSS6 125360	12.5'x360'	500.00	3/BNDL
FCSS6 15300	15'x300'	500.00	3/BNDL
FCSS6 175258	17.5'x258'	500.00	3/BNDL

PERMEABLE 3	PAGE 61		
350 LB • MONO	FILAMENT W	/OVEN	
PART #	SIZE	SQ YDS/ROLL	QTY
FPE350 0625100	6.25'x100'	69.44	30/PLT
FPE350 0625300	6.25'x300'	208.33	20/PLT
FPE350 125300	12.5'x300'	416.67	3/BNDL

FABRIC DISPLA	PAGE 64	
PART #	SIZE	QTY
MMETAL RACK	72" H x 281/4" W x 27" D	45 LBS

SRW 270HP™ •		ORDER	PAGE 63
PART #	SIZE	SQ YDS/ROLL	QTY
FC270HP 15300	15'x300'	500.00	3/BNDL

SRW 370HP™ •	• SPECIAL	ORDER	PAGE 63
HIGH STRENGTH	WOVEN		
PART #	SIZE	SQ YDS/ROLL	QTY
FC370HP 15300	15'x300'	500.00	3/BNDL

Special Order: Large roll sizes are not in stock and will direct ship

SRW 570HP™ • HIGH STRENGTH	00	ORDER	PAGE 63
PART #	SIZE	SQ YDS/ROLL	QTY
FC570HP 15300	15'x300'	500.00	3/BNDL

Special Order: Large roll sizes are not in stock and will direct ship

SRW MM402™ MONOFILAMENT	SRW MM402™ • SPECIAL ORDER MONOFILAMENT		
PART #	SIZE	SQ YDS/ROLL	QTY
FC402MM 12300	12.5'x300'	400.00	3/BNDL

Special Order: Large roll sizes are not in stock and will direct ship

SRW MM403™ • SPECIAL ORDER MONOFILAMENT			PAGE 63
PART #	SIZE	SQ YDS/ROLL	QTY
FC403MM 15300	15'x300'	500.00	3/BNDL

Special Order: Large roll sizes are not in stock and will direct ship

SRW MM700™ MONOFILAMENT	/ MM700™ • SPECIAL ORDER OFILAMENT		
PART #	SIZE	SQ YDS/ROLL	QTY
FC700MM 12300	12'x300'	400.00	3/BNDL

Special Order: Large roll sizes are not in stock and will direct ship



These 12.5' & up rolls are folded before rolling for easier storage & display as smaller more compact rolls.

GEOGRID

RETAINING WALL GEOGRID

UNIVERSAL			PAGE 66
BI-DIRECTIONAL	• LTDS 688	• WALLS UF	P TO 6'
PART #	SIZE	SQ YDS/ROLL	QTY
GSRW U350	3'x50'	16.67	10/CTN
			6 CTN/PLT
GSRW U450	4'x50'	22.22	10/CTN
GS11W 0430	4 700	22.22	9 CTN/PLT
GSRW U650	6'x50'	33.33	40/PLT

3 SERIES			PAGE 66
BI-DIRECTIONAL	• LTDS 116	1 • WALLS U	IP TO 10'
PART #	SIZE	SQ YDS/ROLL	QTY
GSRW 3450	4'x50'	16.67	9/CTN
GSHW 3430	4 7 3 0	10.07	6 CTN/PLT
GSRW 365	6'x50'	33.33	80/PLT
GSRW 3615	6'x150'	100.00	30/PLT
GSRW 31215	12'x150'	200.00	3/BNDL

5 SERIES	PAGE 66		
UNI-DIRECTIONA			
PART #	SIZE	SQ YDS/ROLL	QTY
GSRW 565	6'x50'	33.33	50/PLT
GSRW 5615	6'x150'	100.00	30/PLT
GSRW 51215	12'x150'	200.00	3/BNDL

7 SERIES UNI-DIRECTIONAL	PAGE 66		
PART #	SIZE	SQ YDS/ROLL	QTY
GSRW 7615	6'x150'	100.00	20/PLT
GSRW 71215	12'x150'	200.00	3/BNDL

8 SERIES • SF	PAGE 66				
UNI-DIRECTIONA					
PART #	PART # SIZE SQ YDS/ROLL				
GSRW 8615*	6'x150'	100.00	20/PLT		
GSRW 81215	12'x150'	200.00	3/BNDL		

^{*}Available by pallet QTY only

Special Order: Large roll sizes are not in stock and will direct ship

9 SERIES • SF	PAGE 66					
UNI-DIRECTIONAL • LTDS 4329						
PART #	QTY					
GSRW 9615*	6'x150'	100.00	20/PLT			
GSRW 91215	12'x150'	200.00	3/BNDL			

^{*}Available by pallet QTY only

Special Order: Large roll sizes are not in stock and will direct ship

10 SERIES • S	PAGE 66				
UNI-DIRECTIONAL • LTDS 5160					
PART #	SIZE	SQ YDS/ROLL	QTY		
GSRW 10615*	6'x150'	100.00	20/PLT		
GSRW 101215	12'x150'	200.00	3/BNDL		

^{*}Available by pallet QTY only

Special Order: Large roll sizes are not in stock and will direct ship

11 SERIES • S	PAGE 66		
PART #	SIZE	SQ YDS/ROLL	QTY
GSRW 11615*	6'x150'	100.00	20/PLT
GSRW 111215	12'x150'	200.00	3/BNDL

Special Order: Large roll sizes are not in stock and will direct ship

R	റ	Δ	D	R	Δ	ς	F	G	в	റ	G	R	Т	١
	$\mathbf{}$	_				J	_	u	_	u	J	п/	ш=	4

TYPE 1			PAGE 67
PART #	SIZE	SQ YDS/ROLL	QTY
GSRW TYPE1 129246	12.9'x246'	352.60	1
	*		DA 05 07

TYPE 2			PAGE 67
PART #	SIZE	SQ YDS/ROLL	QTY
GSRW TYPE2 129164	12.9'x164'	235.066	1

3D GRID T • S	PECIAL OF	RDER	PAGE 67
PART #	SIZE	SQ YDS/ROLL	QTY
G3DT 129246	12.9'x246'	352.60	1

3D GRID HT •	SPECIAL C	RDER	PAGE 67
PART #	SIZE	SQ YDS/ROLL	QTY
G3DHT 129246	12.9'x246'	352.60	1

Special Order: Large roll sizes are not in stock and will direct ship

3D GRID XL •	SPECIAL C	RDER	PAGE 67
PART #	SIZE	SQ YDS/ROLL	QTY
G3DXL 129164	12.9'x164'	235.07	1

Special Order: Large roll sizes are not in stock and will direct ship

^{*}Available by pallet QTY only

BASE REPLACEMENT

HEXABASE™			PAGE 72
PART #	AMT PER CTN	TOTAL SQ FT	QTY
GSRW HB CTN	6/BNDL	16.15	18 BNDL/PLT
GSRW HB BULK*	1	452.20	168 PCS/PLT

^{*} Bulk HexaBase™ available by pallet quantities only

ULTRA DRIVE	PAGE 74		
PART #	SIZE	SQ YDS/ROLL	QTY
GSRW UD3D 65150	6.5'x150'	108.33	1
GSRW UD3D 125150	12.5'x150'	208.33	1

WALL SYSTEM AND ENGINEERING

WALL DRAIN PRO®			PAGE 76
PART #	SIZE	AMT PER CTN	QTY
WDP-BLACK	1.375" x 14.25" x 7.75"	12/CTN	63 CTNS/PLT
WDP-TAN	1.375" x 14.25" x 7.75"	12/CTN	63 CTNS/PLT
WDP-GRAY	1.375" x 14.25" x 7.75"	12/CTN	63 CTNS/PLT
WDP-46" NECK	46"	1	-

EARTHWORKS™		PAGE 76	
PART #	SIZE	QTY	
EAR8/EAR12	8" AND 12"	250/CTN	
EAR10/EAR12-8	10" AND TRANSITION	250/CTN	
EAR COR	CORNER SPACERS	100/CTN	

SLEEVE-IT® SI	PAGE 77		
PART #	SIZE	AMT PER CTN	QTY
GSRW SLEEVIT SD1	15.3" x 30.6" x 23.4"	5/BNDL	9 BNDL/PLT



WHEN YOUR ORDER ARRIVES CHECKYOUR LECAL LE

DON'T SEE WHAT YOU NEED? SIMPLY ASK.

We're here to help! Call us at 800.752.9326

HTS HARDSCAPE TECHNICAL SERVICES

HTS PROS GUIDE

ALLAN BLOCK® RETAINING WALL SYSTEMS PROS GUIDE		PAGE 79
BLOCK SYSTEM	PART #	QTY
AB® Collection	HTS AB COLLECT RET	10 BOOKS/BOX
AB® Europa Collection	HTS AB EUROPA RET	10 BOOKS/BOX

ANCHOR™ RETAINING WALL SYSTEMS PAGE 79			
BLOCK SYSTEM	PART #	QTY	
Diamond	HTS DIA RET	10 BOOKS/BOX	
Diamond Pro/	HTS DIPRO RET	10 BOOKS/BOX	
Stone Cut	THO DIFNO NET	TO BOOKS/BOX	
Highland	HTS HIGH RET	10 BOOKS/BOX	
Windsor	HTS WINDSOR RET	10 BOOKS/BOX	

BORGERT PRODUCTS PROS GUIDE PAGE 79		
BLOCK SYSTEM	PART #	QTY
PanoMur®	HTS PANO RET	10 BOOKS/BOX

CAMBRIDGE PAVERS PROS GUIDE PAGE 7			
BLOCK SYSTEM	PART #	QTY	
Cambridge Sigma 6™	HTS CAMB SIGMA6 RET	10 BOOKS/BOX	
Cambridge Sigma 8™	HTS CAMB SIGMA8 RET	10 BOOKS/BOX	

CORNERSTO WALL SYSTEI	PAGE 79	
BLOCK SYSTEM	PART #	QTY
CornerStone 100	HTS CS 100 RET	10 BOOKS/BOX
FrogStone	HTS FROG RET	10 BOOKS/BOX
MagnumStone	HTS MAGNU RET	10 BOOKS/BOX
StoneLedge	HTS STLED RET	10 BOOKS/BOX
Mirastone	HS MIRA RET	10 BOOKS/BOX

COUNTY MATERIALS PROS GUIDE PAGE 79				
BLOCK SYSTEM	PART #	QTY		
County Block [™]	HTS CNTY BLOCK RET	10 BOOKS/BOX		
County Tribute™	HTS CNTY TRIBUTE RET	10 BOOKS/BOX		
County Rib Rock	HTS CNTY RIBROCK RET	10 BOOKS/BOX		
County Integrity [™]	HTS CNTY INTEGRITY RET	10 BOOKS/BOX		

DAGISTINO P	RODUCTS PROS	GUIDE	PAGE 79
BLOCK SYSTEM	PART #	C	ΥTΩ
Dagblock	HTS DAGBLOCK RET	10 BO	OKS/BOX

EARTHWORKS™ PROS GUIDE		PAGE 79
BLOCK SYSTEM PART #		QTY
8"	HTS EAR8 RET	10 BOOKS/BOX
12"	HTS EAR12 RET	10 BOOKS/BOX

ICD® RETAINING WALL SYSTEMS PROS GUIDE			
BLOCK SYSTEM	PART #	QTY	
Stonewall Select	HTS ICD STNEWLL RET	10 BOOKS/BOX	

KEYSTONE® RETAINING WALL SYSTEMS PROS GUIDE		PAGE 79
BLOCK SYSTEM	PART #	QTY
Compac	HTS KS COMPAC RET	10 BOOKS/BOX
Country Manor	HTS KS CT MANOR RET	10 BOOKS/BOX
Verazzo	HTS KS VERAZZO RET	10 BOOKS/BOX

LEHI BLOCK INCORPORATED GUIDE		PAGE 79
BLOCK SYSTEM	PART #	QTY
ArtStone	HTS ARTSTONE RET	10 BOOKS/BOX

PYZIQUE® RETAINING WALL SYSTEMS PROS GUIDE		PAGE 79
BLOCK SYSTEM	PART #	QTY
Maytrx	HTS MAYTRX RET	10 BOOKS/BOX

RISISTONE INC. RETAINING WALL SYSTEMS PROS GUIDE		PAGE 79
BLOCK SYSTEM	PART #	QTY
Pisa2®/ RomanPisa®	HTS PISA RET	10 BOOKS/BOX

TECHO-BLOC	PAGE 79	
BLOCK SYSTEM	PART #	QTY
Mini-Creta	HTS MINI-CRETA RET	10 BOOKS/BOX
Monumental	HTS MONUMENTAL RET	10 BOOKS/BOX

VERSA-LOK® RETAINING		PAGE 79
WALL SYSTE	MS PROS GUIDE	
BLOCK SYSTEM	PART #	QTY
Standard	HTS VLSTD RET	10 BOOKS/BOX
Mosaic	HTS MOSAIC RET	10 BOOKS/BOX
Square Foot	HTS VLSQFT RET	10 BOOKS/BOX

VYKING® RETAINING WALL SYSTEMS		PAGE 79
BLOCK SYSTEM PART #		QTY
Vyking	HTS VYK RET	10 BOOKS/BOX

WESTBLOCK® RETAINING WALL SYSTEMS PROS GUIDE		PAGE 79
BLOCK SYSTEM	PART #	QTY
Stonewall	HTS WBSTNEWALL RET	10 BOOKS/BOX

WORLD BLOOWALL SYSTEM	PAGE 79	
BLOCK SYSTEM	PART #	QTY
Knob-Style	HTS WBKNOB RET	10 BOOKS/BOX
Landscape	HTS WBLANDSCAPE RET	10 BOOKS/BOX
Mid-Sized	HTS WBMID RET	10 BOOKS/BOX
V-Interlock	HTS WBVINTERLOCK RET	10 BOOKS/BOX

DRAINAGE

DRAINFEILD FABRIC

DF1.5™ 300' ROLL COLOR CODING RED			PAGE 82
PART #	SIZE	SQ YDS/ROLL	QTY
FD1.5 03300	3'x300'	100.00	42/PLT
FD1.5 04300	4'x300'	133.33	42/PLT
FD1.5 05300	5'x300'	166.67	36/PLT
FD1.5 06300	6'x300'	200.00	36/PLT
FD1.5 12300	12'x300'	400.00	4/BNDL

DF2 ™			PAGE 82
300' ROLL COLOR CODING GREEN			
PART #	SIZE	SQ YDS/ROLL	QTY
FD2 03300	3'x300'	100.00	42/PLT
FD2 04300	4'x300'	133.33	42/PLT
FD2 06300	6'x300'	200.00	36/PLT
FD2 12300	12'x300'	400.00	4/BNDL

WALL DRAIN PRO®			PAGE 82
PART #	SIZE	AMT PER CTN	QTY
WDP-BLACK	1.375" x 14.25" x 7.75"	12/CTN	63 CTNS/PLT
WDP-TAN	1.375" x 14.25" x 7.75"	12/CTN	63 CTNS/PLT
WDP-GRAY	1.375" x 14.25" x 7.75"	12/CTN	63 CTNS/PLT
WDP-46" NECK	46"	1	-

AMERICAN WICK DRAIN*

SHEET DRAIN • AMERICAN WICK DRAIN*			
SINGLE AND DOUBLE SIDED)	PAGE 83	
PART #	SIZE	QTY	
FCMSITEDRAIN	4'x50'	7/PLT	
FCMSITEDRAIN 184DS 4X50	4'x50'	7/PLT	

STRIP DRAIN • AMERICAN WICK DRAIN*			
PART # SIZE QTY			
FCMSITEDRAIN 6406 06150	6"x150'	15/PLT	

E50 CORE • AMERICAN WICK DRAIN*			
PART # SIZE QTY			
FCMSITEDRAIN CORE E-50	6'x50'	12/PLT	

^{*}Special Order

EROSION CONTROL

STRAW BLANK	PAGE 84				
SINGLE AND DOUBLE SIDED					
PART #	PART # SIZE SQ YDS/ROLL QTY				
FCMB STSINGLE 4	4'x50'	22.22	40/PLT		
FCMB STSINGLE 4 CTN	4'x50'	22.22	9/CTN (4CTN/PLT)		
FCMB STSINGLE	8'x112.5'	100.00	25/PLT		
FCMB STDOU- BLE	8'x112.5'	100.00	25/PLT		

^{*} Pallet quantities may vary

EXCELSIOR BLANKET			PAGE 84
PART #	SIZE	SQ YDS/ROLL	QTY
FCMB EXCEL D81125	8'x112.5'	100.00	25/PLT

	CS-3*			PAGE 84
ETS	COCONUT/ST	RAW BLANK	ETS • DOUE	SLE SIDED
ΈE	PART #	SIZE	SQ YDS/ROLL	QTY
BLAN	FCMB	8'X112.5'	100.00	25/PLT
ᇳ	CS81125	6 8 1 1 2 . 5	100.00	25/FLI

¥	* Pallet quantities	may vary		
TRA	CC-4*			PAGE 84
1/S	COCONUT BL	ANKETS • 1	00% COCON	IUT
15	PART #	SIZE	SQ YDS/ROLL	QTY
DCONUT	FCMB	8'X112.5'	100.00	25/PLT
	CO81125	6 / 112.5	100.00	25/FLI
u	* Pallet quantities	may vary		

^{*} Pallet quantities may vary

PP5-10*			PAGE 85
TURF REINFORC	EMENT MAT		
PART #	SIZE	SQ YDS/ROLL	QTY
FCMB TRM 81125	8'X112.5'	100.00	25/PLT

^{*} Pallet quantities may vary **Special Order

SILT SOCK		PAGE 86
PART #	SIZE	QTY
FCMSS 0820 BLK	8"x20'	10/PLT

^{**}Sock Color can be Black or Green

STRAW WATTLE	S*	PAGE 86
PART #	SIZE	QTY
FCMWS 0925	9"x25'	14/PLT
FCMWS 1220**	12"x20'	8/PLT

^{*} Pallet quantities may vary

^{**}Special Order

ROCK LOG*		PAGE 86
PART #	SIZE	QTY
FCMBR 7"4'	7"x4'	5/CTN

While Supplies Last

JUTE MESH			PAGE 87
PART #	SIZE	SQ YDS/ROLL	QTY
FCMB JUTE15 48225	4'x225'	100.00	12/PLT

STRAWMAX			PAGE 87
PART #	SIZE	COVERAGE	QTY
FCMB	22 LB BAG	UP TO 500	40/PLT
STRAWMAX TAC	ZZ LD DAG	SQ FT	40/PLI

EROSION CONTROL

SILT FENCE AND STAKES

SILT FENCE • BLACK 70G • 1.25"x1.25"x42" STAKES			PAGE 88
PART #	SIZE	PER ROLL	QUANTITY
FCMF S03100	3'x100'	13 STAKES	48/PLT
FCMF S0310026	3'x100'	26 STAKES	20/PLT
FCMF S031500	3'x1500'	FABRIC ONLY	9/PLT

SILT FENCE • 70G • 1.25"x1.25	PAGE 88		
PART #	SIZE	PER ROLL	QUANTITY
FCMFO S03100	3'x100'	13 STAKES	48/PLT
FCMFO S031500	3'x1500'	FABRIC ONLY	9/PLT

SILT FENCE STAKES			PAGE 88	
MUST BE PURCHASED IN PALLET QUANTITIES				
PART # SIZE PER ROLL QUANTITY				
FCMF STAKE 42	42"x1.25"	STAKES	840/PLT	
1 1/4	42 X1.20	ONLY	040/1 L1	
FCMF STAKE 48	48"x1.5"	STAKES	25/BNDL-	
TOWN STARL 40	40 ×1.5	ONLY	650/PLT	

DANDY PRODUCTS*

DANDY CURB SAC SPECIAL ORDER	PAGE 89	
PART #	SIZE	QTY
DCS 24 24	24"x24"	5/CTN
DCS 36 24	36"x24"	5/CTN

DANDY CURB BAG SPECIAL ORDER	à® *	PAGE 89
PART #	SIZE	QTY
DCB 36 24	36"x24"	5/CTN

DANDY SACK®* SPECIAL ORDER		PAGE 89
PART #	SIZE	QTY
DS 24 24	24"x24"	5/CTN
DS 36 24	36"x24"	5/CTN
DS 48 24	48"x24"	5/CTN

DANDY BAG®* SPECIAL ORDER		PAGE 89
PART #	SIZE	QTY
DB RD 24	24" ROUND	5/CTN
DB 24 24	24"x24"	5/CTN
DB 36 24	36"x24"	5/CTN
DB 36 36	36"x36"	5/CTN

DANDY DEWATER SPECIAL ORDER*	PAGE 89	
PART #	QTY	
DDB 6 6	6'x6'	1
DDB 10 10	10'x10'	1

pecial	

	FLOATING T	FURBIDITY	BARRIER	S* PAGE 88
	PART #	SIZE	DESCRIPTION	QTY
	T1BAR350	3'x50'	TYPE 1.DOT	1
	T1BAR550	5'x50'	TYPE 1.DOT	1
	T1BAR1050	10'x50'	TYPE 1.DOT	1
RS	T2BAR350	3'x50'	TYPE 2.DOT	1
BARRIE	T2BAR550	5'x50'	TYPE 2.DOT	1
A	T2BAR1050	10'x50'	TYPE 2.DOT	1
	T3BAR350	3'x50'	TYPE 3.DOT	1
DITY	T3BAR550	5'x50'	TYPE 3.DOT	1
8	BARRIER A	CCESSOR	IES*	PAGE 88
URBI	PART #	DESCRIF		QTY

<u>=</u>	BARRIER ACC	CESSORIES* PAGE		
TUR	PART #	QTY		
ANCHORA UP TO WATER ANCHORB UP TO		UP TO 10' WATER DEPTH	1	
		UP TO 10' WATER DEPTH	1	
	FLBUYLTKIT FLOATING BU		1	

^{*}Special Order

PLANT CARE

BURLAP			PAGE 90
PART #	SIZE	SQ YDS.ROLL	QTY
FCMB BURLAP 03025	3'x25'	8.33	20/CTN
FCMB BURLAP 03050	3'x50'	16.66	12/CTN
FCMB BURLAP 03300	3'x300'	100.00	20/PLT
FCMB BURLAP 04300	4'x300'	133.33	20/PLT
FCMB BURLAP 06300	6'x300'	200.00	20/PLT

TREE WATERI	PAGE 91		
PART #	SIZE	AMT PER CTN	QTY
TREE BAG 20G CTN 36	15 GAL	36/CTN	35/PLT

TREE WATER	PAGE 91		
PART #	SIZE	AMT PER CTN	QTY
TREE RING 15G CTN 24	15 GAL	24/CTN	42/PLT

SRW GROW BAC	a [™]	PAGE 90			
PART #	SIZE	QTY			
GROW BAG 5G	5 GAL	35/CTN			
GROW BAG 10G	10 GAL	30/CTN			
GROW BAG 15G	15 GAL	25/CTN			
GROW BAG 20G	20 GAL	20/CTN			

ACCESSORIES

6 MIL. POLY S	HEETING*		PAGE 92
PART #	SIZE	AMT PER CTN	QTY
FBPF6 06100	6'x100'	1	100 CTNS/ PLT
FBPF6 10100	10'x100'	1	48 CTNS/PLT
FBPF6 20100	20'x100'	1	25 CTNS/PLT

*Contact Customer Service at 800-752-9326 for other available sizes

STRETCH WRA	PAGE 92		
PART #	SIZE	GAUGE	QTY
SW 181500 70 GA	18"x1500'	70	4/CTN
SW 181000 120 GA	18"x1000'	120	4/CTN

JETSWEEP	PAGE 93
PART #	QTY
WJS JET SWEEP	1/BAG

RETAIL DISPLAYS

45 LBS

ADHESIVE DISPLAY PAGE S						
PART #	DESC.	QTY				
ADISPLAY	67" H x 16" W x 16" D	40 LBS				
CLEANER/SEALER DISPLAY PAGE 9						
PART #	QTY					
MSIDE	73 LBS					
	72" H x 28" W x 24" D	10 280				
FABRIC DISPLA		PAGE 94				

72" H x 281/4" W x 27" D

MMETAL RACK

	701					S		S
PRX PAVER RESTORE X-TREME JS JOINT STABILIZER ™ S-PS PENETRATING™	PSX PENETRATING X-TREME LGX LOW GLOSS X-TREME HGX HIGH GLOSS X-TREME DG DUAL GUARD	PS PENETRATING™ LG LOW GLOSS™ HG HIGH GLOSS™	SRWE® PRODUCTS SURFACE APPLICATION	M³C MOLD, MOSS & MILDEN CDX CLEANER DEGREASER X-TREME RE RUST ELIMINATOR™ OC ORGANIC STAIN CLEANER™ XY XYLENE SOLVENT™ SS SEALER STRIPPER™ Always test a small area. Check product lab	PW PAVER WASH™ DW DUAL WASH™ EF EFFLORESCENCE™	SRWE® PRODUCTS SURFACE APPLICATION	VERTICAL INSTANT LOCK™* SUPERIOR STRENGTH SOLVEI RAPID-SET POLYURETHANE™ SF-8™ ADHESIVE SEAMS RIGHT™ TURF ADHESI *Always make sure at least one surface is p	SRVE PRODUCTS
			NCRETE PAVERS		Ė	NCRETE PAVERS	IVE	X RETAINING WALLS
			CLAY PAVERS	xterior use. F		CLAY PAVERS	test in a sma	PAVERS/CONCRETE
			CONCRETE PERMEABLE PAVERS	Refer to surface		CONCRETE PERMEABLE PAVERS	Il area. Check p	POOL COPINGS NATURAL STONE & VENEERS
			WETCAST	material mar		WETCAST	In the state of th	MANUFACTURED STONE
			GRANITE/QUARTZ	nufacturer's rece		GRANITE/QUARTZ	for interior/exte	BRICK OUTDOOR KITCHEN
			MARBLE/TRAVERTINE	ommendatic		Marble/Travertine	rior use.	MASONRY
			LIMESTONE	ans on whether		LIMESTONE		METALS
			BLUESTONE/ SANDSTONE	or or not to sea		BLUESTONE/ SANDSTONE		WOOD FOAMBOARD
			BLOCK RETAINING WALLS			BLOCK RETAINING WALLS		MOST PLASTICS
			MANUFACTURED STONE			MANUFACTURED STONE		GLASS & MIRROR CERAMIC TILE
			STAMPED CONCRETE	•		STAMPED CONCRETE		FIRE PITS
SPECIALTY SEAL	PREMIUM SEAL	PAVER SEAL	SEALER CATEGORY	SPECIALTY CLEAN	GENERAL CLEAN	CLEANER CATEGORY		TURF

SRW4® PRODUCTS	TECHNISEAL	ALLIANCE	ROMEX	
PAVERMATE Z3™	HP NEXTGEL	GATOR SUPERSAND BOND G2	-	
X-TREME™	NOCO POLYMERIC JOINT	GATOR MAXX SAND G2	POLYSWEEP X-TREME WIDE JOINT	-
SIMPLYTOUGH™	SMART SAND	GATOR MAXX SAND & GATOR SUPERSAND BOND G2	POLYSWEEP	-
WETLOK™	STORM	GATOR NITRO JOINT SAND & GATOR NITRO-X FINE JOINT SAND	HYDROSWEEP & PS11500 RJS	ROMEX® EASY





SIMPLYTOUGH™

Easy Installation

Scan Here for Installation and Activation Instruction

JOINT WIDTH	COVERAGE
Narrow Joints	55 - 75 Sq. Ft. (5.11 - 6.97 Sq. m.)
Wide Joints	25 - 35 Sq. Ft. (2.32 - 3.25 Sq. m.)





Permeable Jointing Sand

Scan Here for Installation and Activation Instruction

JOINT WIDTH	COVERAGE
1/8"	65 Sq. Ft. (5.11 - 6.97 Sq. m.)
3/16"	55 Sq. Ft. (5.1 Sq. m.)
3/4"	13.5 Sq. Ft. (1.25 Sq. m.)
1"	10.6 Sq. Ft. (0.98 Sq. m.)





X-TREME™

Wide Joints

Scan Here for Installation and Activation Instruction

JOINT WIDTH	COVERAGE
Wide Joints	20 - 45 Sq. Ft. (1.85 - 4.18 Sq. m.)





PAVERMATE S

Scan Here for Installation and Activation Instruction

JOINT WIDTH	COVERAGE
Narrow Joints	55-75 Sq. Ft. (5.11-6.97 Sq. m.)
Wide Joints	20-30 Sq. Ft. (1.86-2.79 Sq. m.)





TECHNICAL PRODUCT INFORMATION

One of the benefits of partnering with SRW Products is our dedication to customer service and support. We also provide our product technical data sheets and safety data sheets on our website.

Our Product Management team is also available to help answer technical questions you might have. Call us, or contact us through our website.



	SRVE PRODUCTS SURFACE APPLICATION	NATURAL STONE	CONCRETE PAVERS	CLAY PAVERS	WETCAST	MANUFACTURED STONE	BLOCK RETAINING WALLS	HIGH PSI CONCRETE (5000 OR HIGHER)	REBAR REINFORCED CONCRETE	WIRE MESH REINFORCED CONCRETE	GREEN CONCRETE (12 HRS OR LESS)	GREEN CONCRETE (20 HRS OR MORE)	CURED CONCRETE	ASPHALT	PORCELAIN
	GENERAL PURPOSE														
ADES	ALL PURPOSE														
BLA	ABRASIVE MATERIAL														
	HARD MATERIAL														

PRODUCTS CONSTRUCTION ROLLS: CROSS REFERENCE	MIRAFI	WILLACOOCHE	US FABIRICS	SKAPS
NW4	140NC	400N	US 100NW	GT 140
NW4.5	140N	450N	US 120NW	GT 142
NW6	160N	600N	US 160NW	GT 160
NW7	170N	700N	US 180NW	GT 170
EC8	180N	800N	US 205NW	GT 180
NW10	1100N	1000N	US 250NW	GT 110
NW12	1120N	1200N	US 300NW	GT 112
NW16	1160N	1600N	US 380NW	GT 116
SS5	500X	200W	US 200	SW 200
SS6	600X	315W	US315	SW 315

These cross-reference tables are for comparison only. This information has been obtained from the manufacturers' literature or website. It is the users' responsibility to verify that this is the most current information. All final geogrid/construction comparisons should be determined by a licensed design engineer.

SRWE [®] PRODUCTS APPLICATION	SEPARATION	GENERAL LANDSCAPING	WEED CONTROL	PLANTERS/ PLANTING BEDS	EXPOSED GARDENS	STABILIZE BASE UNDER DRIVEWAY & RETAINING WALL	STABILIZATION & REINFORCEMENT	UNDERLAYMENT FOR MULCH & ROCK	FRENCH DRAINS/ DRAINFIELDS	BELOW HEXABASE" SEPARATION	HEAVY RIP-RAP & BOULDER WALLS	FILTRATION
GENERAL LANDSCAPE SB2, SB3, Silver, Silver Elite, Silver Premier												
WEED CONTROL PS1.5, PS2, PS3												
PREMIUM LANDSCAPE PPIV", PPV"												
CROUND COVER GC3™, GC PRO™												
STABILIZATION/SEPARATION SS5, SS6, Permeable 350™												*
NON-WOVEN LS3", NW4, NW4.5, NW6												
NON-WOVEN NW7, EC8**, NW10, NW12, NW16												

*Only applies to Perm 350 fabric

PRODUCTS LARGE FABRIC ROLLS: CROSS REFERENCE	MIRAFI	WILLACOOCHE	US FABIRICS	SKAPS
SRW 270HP	HP270	WINFAB 270HP	US 2500	M220
SRW 370HP	HP370	WINFAB 370 HP	US 3600	M330
SRW 4x4	HP565	WINFAB 4x4	US 4800	-
SRW 570HP	HP570	WINFAB 570 HP	US 4800	M440
SRW 770HP	HP770	WINFAB 770HP	US 7200	-
SRW MM300	FW300	WINFAB 2300	US 830	-
SRW MM402	FW402	WINFAB 2197	US 1540	M404
SRW MM403	FW403	WINFAB 2403	US 840	-
SRW MM404	FW404	WINFAB 2404	US 320	-
SRW MM700	FW700	WINFAB 2199	US 670	M706
PERMEABLE 350™	-	-	-	-

These cross-reference tables are for comparison only. This information has been obtained from the manufacturers' literature or website. It is the users' responsibility to verify that this is the most current information. All final geogrid/construction comparisons should be determined by a licensed design engineer.

	LANDSCAPE FABRIC: CROSS REFERENCE								
PRODUCTS	CGI	DEWITT	FABRISCAPE	HANES	CHEROKEE				
SB2	211 Series (2.1oz)	Premium Weed Control (1.9oz), Typar Premium 3201 (1.9oz), Contractor's Select (1.9oz)	Commercial Weed Stopper (2oz)	Pro Steel (2oz)	2oz Polyester Spunbond				
SILVER	-	-	-	Pro Silver (2oz)	3oz Polyester Spunbond				
SB3	296 Series (2.1oz)	Premium Weed Control (2.5oz Grey), Typar Professional 3301 (3oz), Contractor's Select Plus Black (2.5oz)	Professional Landscape Fabric (3oz)	Pro Steel Plus (2.7oz)	3oz Polyester Spunbond				
SILVER ELITE	-	Contractor's Select Plus Grey (2.5os)	-	Pro Steel Plus (2.7oz)	-				
SILVER PREMIER	-	-	-	-	-				
PS1.5	180 Series (1.7oz)	Standard Weed Control (1.5oz)	-	-	-				
PS2	-	-	-	Pro Ion	2oz Polyspun				
PS3	395 Series (3oz)	Dewitt Professional Weed Control Black, EarthTone (3oz), Dewitt Weed-Barrier Pro (Black/Black)(Black/ Brown) (3oz)	-	Pro Ion Plus (2.8oz)	3oz Polyspun				
PRO PLUS IV	450 Series (4.1oz)	Professional Max Weed Control (4.1oz)	Woven Weed Restrictor (4.1oz)	I Pro Platinum I					
PRO PLUS V	500 Series (5oz)	Pro 5 Weed-Barrier (5oz)	Woven Weed Restrictor Plus (4.75oz)	Pro Platinum Plus	2oz Polyspun				
GC3™	3oz Ground Cover	-	-	Pro Gold (3oz GC)	-				
GCPRO™	-	SunBelt (3.2oz)	Woven Ground Cover (3.2oz)	-	320 Series (3.1oz)				
LS3™	-	-	Professional Non-Woven (3.1oz)	-	-				

SRWE PRODUCTS GEOGRID: CROSS REFERENCE	STRATA Stratagrid	SYNTEEN SF	MIRAFI Miragrid	TENSAR mse/hs
UNIVERSAL	-	-	-	-
3 SERIES	UX SGB30/SG150	SF20	2XT	UX 1100
5 SERIES	SGU40/SG200	SF35	3XT	UX 1400
7 SERIES	SGU60/SG350	SF55	5XT	US 1500
8 SERIES	SGU80/SG500	SF65	7XT	UX 1600
9 SERIES	SGU110/SG550	SF80	8XT	UX 1700
10 SERIES	SGU120	SF90	-	UX 1800
11 SERIES	SGU150/SG650	SF110	10XT	-

SRW Products Roadbase Geogrids are also available. Call for quote and individual specs.

SRW4 PRODUCTS	LONG TERM DESIGN STRENGTH	APERTURE SIZE (AVG)	DESIGN STRENGTH	WIDE WIDTH TENSILE STRENGTH	ROLL WIDTH	COMPARATIVE PRODUCTS
GEOGRID: SPECIFICATIONS	LB/FT, MD	MD X CMD	RFCR/RFID/RFD	% ULTIMATE, MD	FT	-
UNIVERSAL	688	1204	2193	2866	3,4,6	-
3 SERIES	1204	SF20	2XT	UX 1100	4,6,12	MIRAFI 2XT Strata SGU30/SG150
5 SERIES	2193	SF35	3XT	UX 1400	6,12	MIRAFI 3XT Strata SGU40/SG200
7 SERIES	2866	SF55	5XT	US 1500	6,12	MIRAFI 5XT Strata SGU60/SG350
8 SERIES	3555	SF65	7XT	UX 1600	6,12	MIRAFI 7XT Strata SGU80/SG500
9 SERIES	4587	SF80	8XT	UX 1700	6,12	MIRAFI 8XT Strata SGU110/SG550
10 SERIES	SGU120	SF90	-	UX 1800	6,12	Strata SGU120
11 SERIES	SGU150/SG650	SF110	10XT	-	6,12	MIRAFI 10XT STRATA SGU150/SG650

SRWE PRODUCTS		MATE NGTH		. AT 2% AIN		. AT 5% AIN		JRE SIVE 'G.)	MIN. RIB THICKNESS	ROLL WIDTHS	COMPARATIVE PRODUCTS
ROAD BASE GEOGRID: SPECIFICATIONS	MD	XMD	MD	XMD	MD	XMD	MD	XMD	MD x CMD	FT	-
TYPE 1	850	1300	280	450	580	920	1.06"	1.45"	.03" .03"	12.9"	Tensar BX1100
TYPE 2	1310	1970	410	620	810	1340	1.10"	1.49"	.05" .05"	12.9"	Tensar BX1200

ABOUT SRW PRODUCTS



After all, we are SRW Products. No one does it better! David Orton, CEO



JARRED HUTTO

West Coast Sales Manager

Cell: 208-513-0706

Office: 763-220-5882

Email: jarredhutto@srwproducts.com



JASON ORTON

V.P. of Sales and Marketing



DALE PERBIX

Central US Sales Manager

Cell: 763-498-2775

Office: 763-260-8714

Email: daleperbix@srwproducts.com

MICHAEL ANDERSON



TIM SANBORN

National Accounts Sales Manager
Cell: 763-203-2966
Office: 763-260-8713
Email: timsanborn@srwproducts.com



East Coast Sales Manager Cell: 856-952-2007 Office: 856-244-7004 Email: michaelanderson@srwproducts.com

CORPORATE OFFICE

32005 126th Street | PO Box 70 | Princeton, MN 55371

Toll Free: 800-752-9326 Phone: 763-389-2722 Fax: 763-389-2725

WEST DISTRIBUTION CENTER 4801 Feather River Blvd. Unit 4 Oroville, CA 95965 530-212-8272

CENTRAL

DISTRIBUTION CENTER 32020 126th Street Princeton, MN 55371

800-752-9326

SOUTHEAST

DISTRIBUTION
CENTER
2441 Hwy 123 East
Toccoa, GA 30577
762-204-1770

TEXAS

DISTRIBUTION CENTER
1351 Post &
Paddock Rd
Grand Prairie, TX
75050

NORTHEAST

DISTRIBUTION CENTER
Rt. 55 Industrial

Center 70 Sewell Street, Unit I, Glassboro, NJ 08028

856-244-7001

FIND AN

Authorized We're constantly partnering with new

reputable dealers across North America to ensure you always have access to the best products, regardless of your project location. Scan the QR Code below to find your closest SRW Products dealer. Although our distribution centers are some of the fastest in the industry, there's always a chance that our dealers ran out of our products recently. We recommend contacting the dealer in your area before making a trip to their location to ensure they have the product(s) in stock you are looking for.

Do you have a favorite dealer who isn't in our network? Call them and tell them about us. Our responsiveness and quick turnaround time mean they can quickly carry our extensive product line.



DEALER NETWORK

Our products are available from leading hardscape suppliers across the United States and Canada. Over 5,000 dealers turn to SRW Products for the consistent quality and performance they have come to trust.



SRW Products Distribution - U.S. and Canada

NECTED!



@ SRWproducts













Contact us: 800-752-9326 View our digital catalog at SRWProducts.com